



# Scenario analysis and sensitivity exploration of the MEDEAS Europe energy-economy-environment model

Roger Samsó<sup>a,\*</sup>, Ignacio de Blas<sup>b</sup>, Ilaria Perissi<sup>c</sup>, Gianluca Martelloni<sup>c</sup>, Jordi Solé<sup>a,1</sup>

<sup>a</sup> *Institute of Marine Sciences (ICM-CSIC), Passeig Marítim de la Barceloneta, 37-49. E-08003, Barcelona, Spain*

<sup>b</sup> *Research Group on Energy, Economy and System Dynamics, Escuela de Ingenierías Industriales, Paseo del Cauce s/n, University of Valladolid, 47011 Valladolid, Spain*

<sup>c</sup> *Consorzio Interuniversitario Nazionale per la Scienza e la Tecnologia dei Materiali (INSTM), c/o Dipartimento di Chimica, Università degli Studi di Firenze, Via della Lastruccia 3, 50019 Sesto Fiorentino, Firenze, Italy*

## ARTICLE INFO

### Keywords:

Energy transition  
Sustainability  
Python  
Vensim®  
Factor prioritization  
Euclidean distance  
Sensitivity analysis  
Uncertainty analysis  
Policy-making  
Integrated assessment models

## ABSTRACT

Today's decision-makers rely heavily on Integrated Assessment Models to guide the decarbonisation of the energy system. Uncertainty is embedded in the assumptions these models are built upon. Unless those uncertainties are adequately assessed, using Integrated Assessment Models for policy design is unadvised. In this work we run Monte Carlo simulations with the MEDEAS model at European Union scale to assess how the uncertainties on the main drivers of the transition affect key socioeconomic and environmental indicators. In addition, One-at-a-time sensitivity exploration is performed to grade the contribution of a set of model parameters to the uncertainty in the same key indicators. The combination of the uncertainties in the model drivers magnify the uncertainty in the model outputs, which widens over time. Parameters affecting sectorial and households' energy efficiency and households' transport energy use ranked amongst the most impacting ones on simulation results.

## 1. Introduction

In the process to achieving long-term sustainability of human societies, and with capitalism as the global economic system of choice, all hopes are put on the urgent replacement of fossil fuels by renewable energy as the mean to avoid the worst impacts of the current climate crisis and the foreseeable energy crisis.

Compared to past global challenges such as the ozone layer depletion, maintaining the status quo while transitioning our societies in such context of climate change, environmental degradation and potential energy scarcity is undoubtedly amongst the most complex humanity as a whole has ever faced.

While certain critical planetary boundaries have already been crossed [1,2], putting the climatic stability and resource abundance that our societies have enjoyed during the Holocene at stake, failing to take the right decisions in the coming years may bring our planet and our civilization to a point of no return. In such challenging and uncertain

context, all kinds of tools, perspectives and approaches will be needed to guide decision-making. In this sense, numerical models, and particularly Integrated Assessment Models (IAMs) are a group of mathematical models used to portray the social, economic, environmental, climatic and institutional dimensions of, in the context of this work, the energy transition [3]. As such, they represent valuable decision support tools, since they provide a riskless manner of exploring alternative scenarios and policies [4,5].

Despite the great advances made in the development of IAMs in the last decades, most of them still share a core set of common assumptions whose validity is being disputed in scientific forums. First, IAMs are generally characterized by a rather sequential structure with limited feedbacks among the represented subsystems. It is especially relevant the omission of climate change impacts [6–8]. Second, a lack of plurality in the methods to represent the economic dimension has been detected in the literature, dominated by assumptions of conventional equilibrium through optimization methods, aggregated production functions as well as the widespread use of prices as indicators of scarcity [9]. Third, fossil

\* Corresponding author. Present address: Centre de Recerca Ecològica i Aplicacions Forestals (CREAF), Campus UAB. Edifici C, 08193, Bellaterra, Barcelona, Spain.

E-mail addresses: [r.samsó@creaf.uab.cat](mailto:r.samsó@creaf.uab.cat) (R. Samsó), [ignaciodeblas@eii.uva.es](mailto:ignaciodeblas@eii.uva.es) (I. de Blas), [ilaria.perissi@unifi.it](mailto:ilaria.perissi@unifi.it) (I. Perissi), [gianluca.martelloni@unifi.it](mailto:gianluca.martelloni@unifi.it) (G. Martelloni), [jsole@icm.csic.es](mailto:jsole@icm.csic.es) (J. Solé).

<sup>1</sup> Present address: Departament d'Enginyeria Mecànica, Universitat Rovira i Virgili (URV). Campus Sescelades, Avinguda dels Paisos Catalans, 26 - 43007 Tarragona, Spain. [jordi.sole@urv.cat](mailto:jordi.sole@urv.cat)

**Abbreviations**

BAU	Business As Usual	Environmental And Socioeconomic constraints
CSP	Concentrated Solar Power	MIT
EROI	Energy Return on Investment	Massachusetts Institute of Technology (license)
EROIst	Standard Energy Return on Investment	NEMS
ESME	Energy Systems Model (for the UK)	National Energy Modelling System
ESOI	Energy Storage On energy Invested	NPP
ETM	Energy Transition Model	Net Primary Production
EU28	European Union of 28 member states	OAT
GDP	Gross Domestic Product	One-at-a-time
GDPpc	Gross Domestic Product per capita	PE
GHG	Greenhouse gas (emissions)	Primary Energy
GSA	Global Sensitivity Analysis	POLES
IAMs	Integrated Assessment Models	Prospective Outlook on Long-term Energy Systems model
IEA	International Energy Agency	PV
IT	Information & Technology	solar Photovoltaic
LEAP	Long-range Energy Alternatives Planning system model	RE
MEDEAS	Modelling sustainable Energy system Development under	Renewable Energy
		RES
		Renewable Energy Sources
		RETScreen
		Renewable-energy and Energy-efficiency Technology
		Screening software
		RMSD
		Root Mean Square Deviation
		SA
		Sensitivity Analysis
		TFEC
		Total Final Energy Consumption
		TIMES
		The Integrated MARKAL-EFOM System (model)
		UA
		Uncertainty Analysis
		WEM
		World Energy Model

fuel resource abundance, understood as the vast geological availability accessible at an affordable price, is a default assumption in most of the prominent IAMs used for climate policy analysis. Also, it is usually assumed that the resource base of renewable energy sources (RES) provides no practical limitation if adequate investments are forthcoming [10]. Finally, most models disregard the implications that the future energy and mineral investments to achieve the transition to renewables may have for the system [11].

The MEDEAS models were developed to fill those gaps. Leaving technological and economic parameter differences and licensing aside, based on the classification used in Ref. [8], the MEDEAS models are comparable to the ETM [12], LEAP [13], NEMS [14], POLES [15], RETScreen [16] and IEA's WEM [17] models. However, the following aspects set the MEDEAS models apart from their counterparts. First, their implementation using the system dynamics approach allows to represent none-equilibrium processes and feedback loops (e.g. climate damage); second, biophysical limits in terms of energy and mineral resources are enforced: the availability of fossil fuels is represented using Hubbert curves [18], and the minerals consumption is referred to their actual resources and reserves; third, by using physical variables (energy) in the economic module, potential energy scarcity events are represented without losing sight of the economy (by using Input Output Tables and energy intensities [19]); and finally, the Python version of the MEDEAS models (pymedeas) is distributed for free and is fully open source.

Despite the unquestionable potential of IAMs, the largely uncertain factors that will shape the future energy system, including technological innovation, resource availability, socio-economic dynamics and geopolitics [20], are unavoidably embedded in the thousands of hypothesis and parameters included in these models and propagate to their outputs [21]. Consequently, unless sufficient testing of their projections is provided, these models risk losing credibility [22,23]. Most importantly, scientific models are today's intermediaries between science and policy [24], hence uncertainty represents a non-negligible concern [25] that has to be addressed in order for the models to serve society [26].

Uncertainty and Sensitivity analysis are methodologies that tackle that particular issue. Uncertainty Analysis (UA) aims at assessing the uncertainty of the model projections resulting from the uncertainty in the model inputs, not trying to identify its origin, while Sensitivity Analysis (SA) is used to identify the input parameters' relative contribution to the outputs uncertainty. To this regard, SA is not to be considered as an alternative to UA but rather as its complement [27].

The need to include UA and SA in the modelling process is backed by

a large number of publications that count these techniques among the best modelling practices and especially for their application in policy design [20,28–30]. The information extracted from their application provides a better understanding of the functioning and behavioural boundaries of the model. Most importantly, these techniques must make it possible to explain results from the model in terms of the mechanisms that drives the model [30].

Although the application of UA and SA in energy-economy IAMs is limited [24,30], examples include: Ref. [22], who performed Global Sensitivity Analysis (GSA) of Res-IRF, an energy-economy model of the demand for space heating in French dwellings; Ref. [31] used UK energy system model, ESME, to explore trade-offs in cost effective energy transition scenarios and performed a sensitivity analysis to explore the uncertainties that have most impact on the transition; Ref. [32] performed a sensitivity analysis on the GET 7.0 model to analyse how the development of the energy supply system in a carbon-constrained world influences the cost-effectiveness of fuels and propulsion technologies in the transportation sector. Other examples of the application of SA techniques in IAMs are reviewed in Ref. [33]. Based on the low number of such works, and taking into account the vast and largely unknown number of parameters that IAMs include, the knowledge gaps and uncertainties on the shape the energy transition will take remain even larger.

To date no study has been published dealing with uncertainty in the MEDEAS models. Only in Ref. [34] a scenario analysis was performed, though in the form of a parametric optimization. Hence, the current work represents the first application of uncertainty and sensitivity procedures to the MEDEAS models, and a further claim for the need to apply these techniques in IAMs used in policy design.

Additionally, in this work parameter sensitivity is analysed both qualitatively and quantitatively, and 3 different measures of sensitivity are combined to derive results. The first measure consists on the use of Spider plots, which provides visual clues on the impact of each input on each output. On the other hand, the quantitative measures are the RMSD and the Euclidian distance. The first provides an indication of the sensitivity of each output parameter relative to each input along the analysed timeframe, while the second measures the impact of each input on the combined trajectory of all the selected outputs altogether.

By using these procedures, the main objectives of this work are (1) to assess the uncertainties embedded in the model projections and (2) to identify the main drivers of the energy transition of the EU28, hence provide clues on the key aspects that need to be dealt with in order to make the energy transition happen.

After the Introduction, this document is structured as follows: in the Methods section we first present the theoretical background of the MEDEAS models. After that we describe the simulations that were run and present how the results were processed in order to obtain the indicators used to assess uncertainty and sensitivity. The Methods section is followed by the Results, the Discussion and the final conclusions.

## 2. Methods

### 2.1. The MEDEAS models

MEDEAS (Modelling sustainable Energy system Development under Environmental And Socioeconomic constraints) is a Horizon 2020 research project that started in 2015 with the aim of developing new IAMs to tackle the aforementioned limitations of most mainstream IAMs. This project represents a joint effort of a consortium of 12 European institutions, including public and private research centres and universities, energy agencies and IT services companies, to provide policy makers with a modelling tool to test new and existing policies to achieve a more sustainable European Energy system.

More specifically, the MEDEAS are a set of a policy-simulation dynamic-recursive models sharing the same conceptual modelling approach and designed applying System Dynamics. They are available at three geographical scales: World, EU28 and country-level (Austria and Bulgaria). The one used in this work is that at European scale.

Although the models were originally developed in the proprietary Vensim® software, the official version of the MEDEAS models are written in Python and distributed free of charge under the MIT license, guaranteeing transparency, reproducibility and traceability [4].

All three models are structured in seven main conceptual sub-modules: Economy, Energy availability, Energy infrastructures, Materials, Land-use, Climate/Emissions, and Social & Environmental impact indicators (Fig. 1).

The MEDEAS models dynamically operate as follows: for each period, a sectoral economic demand is estimated from exogenous pathways of expected Gross Domestic Product per capita (GDPpc) and population evolution. The final energy demand required to fulfil production is obtained using energy-economy hybrid input-output analysis, and energy intensities by type of final energy. The energy sub-module computes the available final energy supply, which may or may not

satisfy demand, adapting the economic production to the available energy. The materials required by the economy, with emphasis on those required by alternative green technologies, are estimated; this allows to assess eventual future mineral bottlenecks. The new energy infrastructure requires energy investments, whose computation allows to estimate the variation of the EROI (Energy Return over Energy Invested) of the system, which in turn affects the final energy demand. The climate sub-module computes the greenhouse gas (GHG) emissions associated to the resulting energy mix (complemented by exogenous pathways for non-energy emissions), which feeds back to the economy, affecting final demand. Additional land requirements are accounted for. Finally, the social and environmental impacts are computed. For more detail the reader is referred to Refs. [36,37].

Despite their short existence, the MEDEAS models have already been used to study different aspects of the energy-economy-environment interrelations in 6 publications. In Ref. [36] the MEDEAS model at World scale was presented, and the main features and hypothesis were discussed. In Ref. [37], the Python version of the EU28 model (pymedeas\_eu) was introduced, the principles behind its development approach were laid-out (openness, transparency, user friendliness and community-based design) and the effect of the main features of the model (evolution of sectorial energy efficiencies, EROI (Energy Return on Investment) feedback, climate change impacts and fossil fuels availability) was demonstrated through a scenario analysis. In the third study [38], the MEDEAS model at World scale was used to evaluate the energy (based on the EROI) and the material costs of the transition. Ref. [34] performed an optimization study aimed at finding the values of a set of model parameters in order to fit the simulated CO<sub>2</sub> emissions to previously obtained decarbonisation pathways that would allow to remain below 2 °C of global warming [39]. The fifth work [19] presents the macro-economic module included in the MEDEAS models and uses simulation results obtained from different input scenarios to highlight the conflict between economic growth, climate policy and the sustainability of resources. Finally, Ref. [40] describes a novel methodology, implemented in the MEDEAS models, to estimate energy demand based on the projection of the evolution of sectoral final energy intensities.

### 2.2. Simulations

The simulations are divided between those used for the Uncertainty

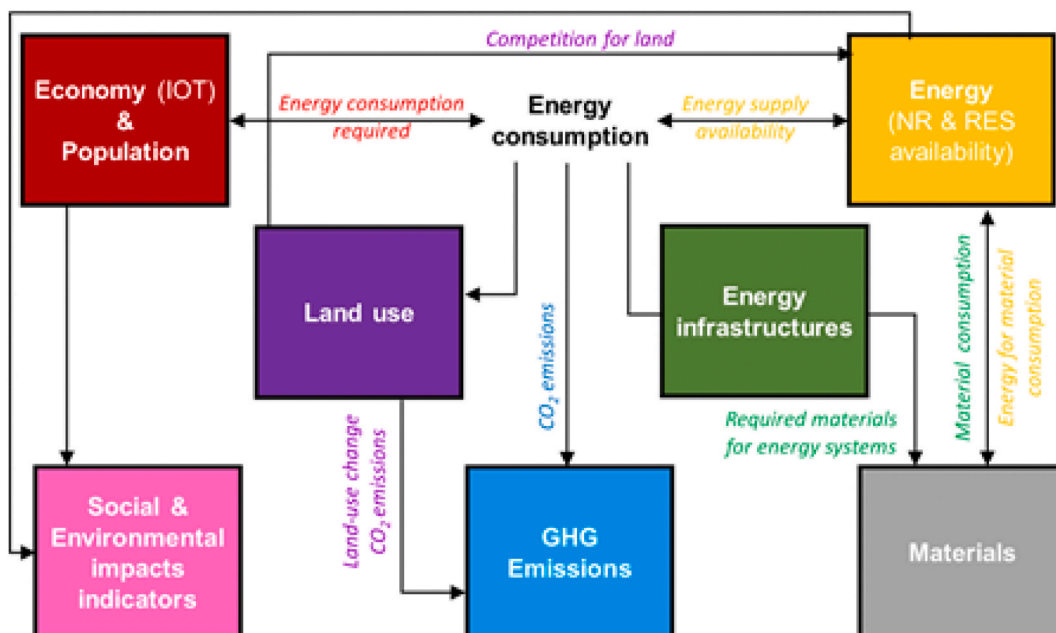


Fig. 1. Graphical representation of the modules of the MEDEAS models [35].

Analysis (UA) and those used for the Sensitivity analysis (SA). Thus, in the first group of simulations (UA), the propagation of uncertainty from inputs to outputs is assessed, while in the second group (SA), the contributions of the inputs to the uncertainty of each of the outputs is analysed.

The protocol presented herein corresponds to running multiple simulations with different combinations of the input parameters values, each within a predefined range. This way, uncertainty in the inputs is propagated to the outputs and can be assessed/quantified.

All simulations comprise the time-frame between 1995 and 2050, with a time-step of 0.03125 years (11.4 days). The outputs are analysed at an annual frequency. Model projections start from 2015, while before that the presented results correspond to historical data.

The scenario used for all simulations is the Business as Usual (BAU), which perpetuates historical trends of economic growth, sustained by fossil fuels, in which little efforts are put into making the transition to decarbonizing the energy system. For further details, the description of the most relevant inputs and assumptions that characterize the BAU narrative in the MEDEAS models can be found in Ref. [40] (Appendix C and Table C. 1).

### 2.2.1. Uncertainty Analysis

The 27 input parameters perturbed during the scenario analysis belong to a subgroup of the exogenous model parameters that the user is expected to tweak to create different simulation scenarios (model drivers). Their names, description and their assigned minimum and

maximum values are presented in Table 1.

Among all parameters that define scenarios in the MEDEAS models, these 27 were selected due to their uncertain nature and because they were expected to have a large impact on the simulation outputs. The list includes the desired GDPpc annual growth rate, the annual population change, and the techno-ecological potentials and growth of the deployment rates of the different RE technologies included in the model (solar photovoltaic (PV), Concentrated Solar Power (CSP), onshore and offshore wind, etc.) (see Table 1). The upper and lower values of the ranges for each of them were selected making a trade-off between covering the widest possible range of the values to check the model stability, and limiting the values to realistic figures for the uncertainty analysis.

Version 1.2 of the Vensim® implementation of the model (MEDEAS\_EU v1.2) was used to take advantage of the built-in Sensitivity Simulations functionality, which in this work was used to evaluate uncertainty. One thousand multivariate Monte Carlo simulations were run on a conventional workstation, sampling from random uniform distributions between the minimum and maximum values given to each input parameter (Table 1).

### 2.2.2. Sensitivity exploration

For the sensitivity exploration, 19 fixed-value (mostly based on literature values) model parameters were selected. The focus was put, again, on those parameters whose values were judged more uncertain. The minimum and maximum values they were given were based on

**Table 1**

Input parameter names (Vensim® nomenclature), description and minimum and maximum values used to obtain the random uniform distribution for each of them for the scenario analysis.

Input parameter	Description	Unit	Nom. Value in BAU	Minimum	Maximum
P customized cte GDPpc variation	Desired per capita GDP constant annual change.	1/Year	0.02	-0.05	0.2
P customized cte pop variation	Population constant annual change.	1/Year	0.005	-0.05	0.05
max hydro TWe	Techno-ecological potential of hydropower.	TWe	0.05	0.025	0.2
max PE geot-elec TWth	Maximum potential primary energy of geothermal for electricity generation.	TWth	0.0198	0.01	0.066
max oceanic TWe	Techno-ecological potential of oceanic energy.	TWe	0.0011	0.001	0.011
max onshore wind TWe	Techno-ecological potential of onshore wind.	TWe	0.1	0.05	0.5
max offshore wind TWe	Techno-ecological potential of offshore wind.	TWe	0.1	0.06	0.8
max potential PHS TWe	Maximum potential for Pumping-storage hydroelectricity.	TWe	0.0138	0.008	0.055
P geot growth	Annual geothermal capacity growth in relation to the existing installed capacity.	1/Year	0.034	0	0.1
P solid bioE-elec growth	Annual solid bioenergy for electricity capacity growth in relation to the existing capacity.	1/Year	0.035	0	0.3
P oceanic growth	Annual oceanic energy capacity growth in relation to the existing capacity.	1/Year	0.004	0	0.6
P solar PV growth	Annual solar photovoltaic capacity growth in relation to the existing capacity.	1/Year	0.035	0	0.6
P wind offshore growth	Annual offshore wind capacity growth in relation to the existing capacity.	1/Year	0.254	0	0.6
P wind onshore growth	Annual onshore wind capacity growth in relation to the existing capacity.	1/Year	0.087	0	0.5
P hydro growth	Annual hydropower capacity growth in relation to the existing capacity.	1/Year	0.007	0	0.1
P CSP growth	Annual concentrated solar power capacity growth in relation to the existing capacity.	1/Year	0.036	0	0.5
P biofuels 2gen land compet	Annual capacity growth of second generation biofuels in relation to the existing capacity.	1/Year	0.04	0	0.2
P biofuels 3gen land compet	Annual capacity growth of third generation biofuels in relation to the existing capacity.	1/Year	0.04	0	0.2
start year 3gen cellulosic biofuels	Year of the introduction of third generation biofuels in the energy market.	Dimensionless	2025	2020	2050
Annual shift from 2gen to 3gen	Annual share of land shifted from second generation to third generation biofuels.	1/Year	0.1	0	0.4
P bioE residues	Annual growth of electric bioenergy produced from residues in relation to the existing capacity.	1/Year	0.11	0	0.3
max PE biogas EJ	Maximum potential primary energy generation from biogas.	EJ/Year	4	3.2	16
Max NPP potential bioE residues	Maximum potential Net Primary Production (NPP) for electric bioenergy from residues.	EJ/Year	0.825	0.66	3.3
max PE waste	Maximum potential primary energy generation from waste (waste-to-energy).	EJ/Year	2	1.25	5
P solar for heat	Annual capacity growth of solar power for heat generation in relation to the existing capacity.	1/Year	0.07	0.1	0.5
P geothermal for heat	Annual capacity growth of geothermal power for heat generation in relation to the existing capacity.	1/Year	0.051	0.05	0.3
P solid bioE for heat	Annual solid bioenergy for heat capacity growth in relation to the existing capacity.	1/Year	0	0.05	0.4

expert best guesses and are also presented in Table 2.

In addition, to evaluate the impact of two endogenous parameters on the model outputs, they were both multiplied by a constant, that either divided (minimum value of the range) or multiplied (maximum value) the actual value of the variable by 2. The two endogenous variables were in fact vectors, and only some of their dimensions were perturbed (see Table 3).

The Sensitivity exploration was carried out using version 0.3.0 of pymedeas\_eu model, which is the Python translation of the Vensim® model used for scenario analysis. Forty-three simulations were run, modifying one parameter at a time (OAT): 21 with the upper values of the range of each parameter, 21 with the lower values and 1 with nominal values (see Tables 2 and 3).

### 2.3. Sensitivity indexes and results processing

The list of endogenous parameters (model outputs) upon which the uncertainty of the inputs is assessed, was confectioned based on a qualitative comparison of the MEDEAS model with two of the most widely used energy-economy models (TIMES [41] and LEAP [13]), and includes the parameters that are present in all three models (Table 4). This previous work was done with the aim of facilitating a future comparison between the outputs of the three models at country scale (Austria and Bulgaria).

**Table 2**

Exogenous parameters names (using the pymedeas\_eu naming convention), description, units and nominal and minimum and maximum values used for the sensitivity exploration.

Exogenous parameter name	Description	Unit	Nominal	Max. value	Mini. value
a1_coef_th	Average energy spent in transportation for households in liquid-based four-wheelers per unit of households' economic demand. Assuming their present use and technical efficiency.	EJ/10 <sup>12</sup> 1995 US\$	1.929	2.8935	0.9645
a2_coef_th	Average energy spent in transportation for households in liquid-based two-wheelers per unit of households' economic demand. Assuming their present use and technical efficiency.	EJ/10 <sup>12</sup> 1995 US\$	0.5502	0.8253	0.2751
eooldashrr_minerals_alt_tech_n_res_vsx_total_economy	Recycling rate of minerals used in variable RE technologies in relation to the rates of recycling of the total economy.	Dimensionless	0.3333	1.0	0.0
esoi_phs_depleted_potential	ESOI of the depleted potential of PHS. ESOI of PHS linearly decreases with the cumulated PHS installed capacity.	Dimensionless	5.0	10.0	1.0
exponent_availability_conv_gas	Priority of conventional over unconventional gas. The smaller the value, the higher the priority of conventional gas.	Dimensionless	0.25	1.0	0.1
exponent_availability_conv_oil	Priority of conventional over unconventional oil. The smaller the value, the higher the priority of conventional oil.	Dimensionless	0.25	1.0	0.1
future_share_gasdivvxcoalplusgasx_for_elec	Future share of gas over coal and gas for electricity generation.	Dimensionless	0.3	1.0	0.0
max_share_transmxdndistr_elec_losses	Maximum share of electricity transmission and distribution losses (when RES supply 100% of the total consumption).	Dimensionless	0.1698	0.5094	0.0566
min_cp_nuclear	Minimum Capacity factor (Cp) for nuclear energy.	Dimensionless	0.6	0.9	0.333333
min_energy_intensity_vs_initial	Minimum attainable value of the energy intensity of all economic sectors (in percentage with respect to the historical value in 2009).	Dimensionless	0.3	0.45	0.15
min_energy_intensity_vs_initial_h	Minimum attainable value of the energy intensity of households (in percentage with respect to the historical value in 2009).	Dimensionless	0.3	0.45	0.15
min_lifetime_ev_batteries	Minimum lifetime of electric vehicles batteries.	Years	5.0	10.0	2.5
share_energy_requirements_for_decom_ev_batteries	Share of energy required for decommissioning electric vehicles' batteries.	Dimensionless	0.1	0.2	0.05
share_gasdivvxcoalplusgasx_for_heat_plants	Share of natural gas in relation to the total fossil fuels for heat generation.	Dimensionless	0.72	1.0	0.0
share_max_of_change_vs_historical_mean_h	Maximum rate of change of the energy intensities of households (by final source) with respect to historical trends.	Dimensionless	0.5	0.75	0.25
share_max_of_change_vs_historical_mean_rate	Maximum rate of change of the energy intensities of all economic sectors (by final source) with respect to historical trends.	Dimensionless	0.5	0.75	0.25
share_res_elec_generation_curtailedxndxstored	Share of the generation of electricity from RE technologies curtailed or stored.	Dimensionless	0.2	0.5	0.0
threshold_remaining_potential_new_capacity	Value of the remaining potential of each RE technology for electricity generation below which the planning of new capacity is not economically viable (decreasing returns).	Dimensionless	0.5	0.9	0.1
share_energy_requirements_for_decom_res_elec	Energy requirements for decommissioning renewable electricity generation plants as a share of the energy requirements for the construction of new capacity.	Dimensionless	0.1	0.2	0.05

#### 2.3.1. Uncertainty analysis

Results of the scenario analysis were qualitatively interpreted using fan charts showing the confidence bounds around the mean of the distribution of each output variable for the 1000 Monte Carlo simulations.

#### 2.3.2. Sensitivity exploration

On the other hand, the sensitivity measures (qualitative and quantitative) used to analyse the outputs of the 43 simulations consisted on:

- plotting the values of all output variables at the end of the simulation (year 2050) against the percentage of change of each perturbed parameter with respect to its nominal value (spider plots).
- the Root Mean Square Deviation (RMSD) between the curves obtained for each output with the minimum and maximum values of the perturbed input parameters.
- the Euclidean distance between all aggregated outputs obtained with perturbed and nominal values of each input parameter (maximum-nominal and minimum-nominal distances).

The expressions below define the input (Eq. (1)) and output (Eq. (2)) parameter spaces, that will be used in subsequent equations:

$$P = \{p_1, \dots, p_i, \dots, p_{21}\} \tag{1}$$

$$Z = \{z_1(u_1, P, t), \dots, z_j(u_j, P, t), \dots, z_{15}(u_{15}, P, t)\} \tag{2}$$

Where  $p_i$  corresponds to any of the input parameters of Table 1 and  $z_j$

**Table 3**

Endogenous parameter names, descriptions, units, affected indexes/sub-indexes and multiplicative factors that were used during the sensitivity exploration.

Endogenous Parameter	Description	Unit	Affected indexes/sub-indexes	Minimum	Maximum
variation_nondashxenergy_use	Annual variation of fuels for non-energy uses.	EJ	liquids, gases, solids.	x0.5	x2.0
energy_per_x_t	Energy per 10 <sup>12</sup> 1995 US\$ of economic activity of inland transport sector.	EJ/10 <sup>12</sup> 1995 US\$	All inland transport vehicle sub-indexes.	x0.5	x2.0

refers to any of the output variables of Table 4 and  $u_j$  are any other parameters or variables not included in the input parameter space P that each output variable depends on. Note that not all output variables depend on all input parameters in P.  $t$  is time (Eq. (3)).

$$t = \{1995, 1996, \dots, 2050\} \quad (3)$$

The RMSD between the output variables obtained with the minimum and maximum values of each perturbed parameter ( $RMSD^{p_i}$ ) are calculated with Eq. (4):

**Table 4**

List of common outputs of the MEDEAS\_EU and pymedeas\_eu models (using the naming convention of pymedeas\_eu) to be analysed in scenario analysis and sensitivity exploration.

Output parameter name (as in pymedeas_eu)	Description	Units
eroist_system	Standard EROI of the system	Dimensionless
gdp	GDP in 10 <sup>12</sup> 1995 US\$	10 <sup>12</sup> 1995 US\$
gdppc	GDP per capita (10 <sup>12</sup> 1995 US\$ per capita)	\$/people
real_fe_consumption_by_fuel [electricity]	Real final energy consumption by fuel after accounting for energy availability (electricity)	EJ
real_fe_consumption_by_fuel[gases]	Real final energy consumption by fuel after accounting for energy availability (gases)	EJ
real_fe_consumption_by_fuel[heat]	Real final energy consumption by fuel after accounting for energy availability (heat)	EJ
real_fe_consumption_by_fuel[liquids]	Real final energy consumption by fuel after accounting for energy availability (liquids)	EJ
real_fe_consumption_by_fuel[solids]	Real final energy consumption by fuel after accounting for energy availability (solids)	EJ
real_tfec	Real total final energy consumption (not including non-energy uses)	EJ
remaining_potential_tot_res_elec	Remaining potential available as a fraction of unity	Dimensionless
share_res_electricity_generation	Share of RES in the electricity generation	Dimensionless
total_co2_emissions_gtco2	Total annual CO <sub>2</sub> emissions	Gt CO <sub>2</sub> /Year
total_fe_elec_generation_twh	Total final energy electricity generation	TWh
total_land_requirements_renew_mha	Land required for RES power plants and total bioenergy (land competition + marginal lands)	MHa
tpes_intensity_ej_tdollar	Total primary energy intensity	EJ/10 <sup>12</sup> 1995 US\$

$$RMSD_j^{p_i} = \sqrt{\frac{\sum_{t=1995}^{2050} (f_j(u_j, p_1, \dots, p_i^{min}, \dots, p_{21}, t) - f_j(u_j, p_1, \dots, p_i^{max}, \dots, p_{21}, t))^2}{2050 - 1995}} \quad (4)$$

The RMSD is divided by the percentage change of the perturbed parameter ( $\Delta p_i$ ) so that all RMSD obtained for the same output variable (perturbing different inputs) are comparable among them (Eq. (5)).

$$\Delta p_i = \frac{p_i^{max} - p_i^{min}}{p_i^{nom}} \quad (5)$$

Where  $p_i^{max}$ ,  $p_i^{min}$  and  $p_i^{nom}$  correspond to the minimum, maximum and nominal values of the perturbed parameter.

To ensure that all outputs have the same importance on the calculation of the Euclidean distance, they are previously standardised using Eq. (6):


$$\check{f}_j = \frac{f_j - \mu_j}{\sigma_j} \quad (6)$$

where  $f_j$  is the time-series to standardise (endogenous variable),  $\mu_j$  is its mean value and  $\sigma_j$  is its standard deviation. The standardised time-series ( $\check{f}_j$ ) will have a mean of 0 and a standard deviation of 1.

The Euclidean distance (scalar) between the vectors of normalised outputs obtained with the maximum and nominal values of the input parameter  $p_i$ , at time  $t$  ( $E_t^{p_i, max-nom}$ ) is obtained with Eq. (7):

$$E_t^{p_i, max-nom} = \sqrt{\sum_{j=1}^{15} (\check{Z}_{j,t}^{p_i, max} - \check{Z}_{j,t}^{p_i, nom})^2} \quad (7)$$

Where,  $\check{Z}_{j,t}^{p_i, max}$  and  $\check{Z}_{j,t}^{p_i, nom}$  are the vectors of standardised outputs resulting from simulation with the maximum and nominal values of the range for

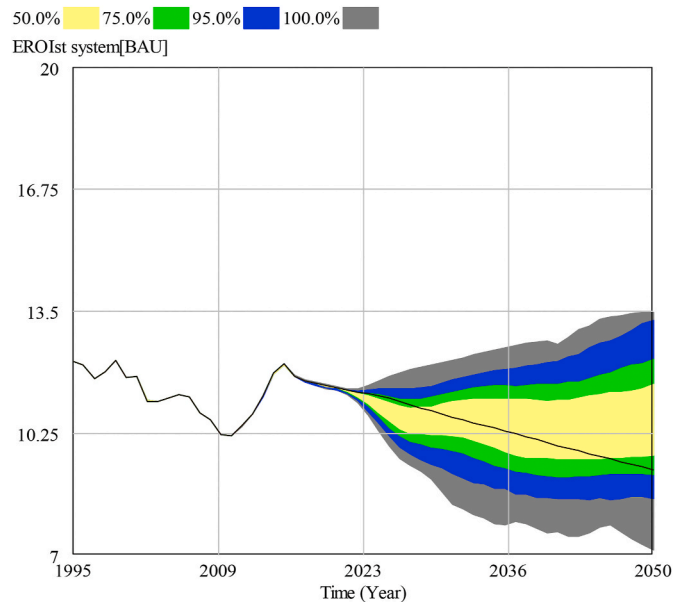

**Fig. 2.** Confidence bounds for the standard EROI of the system (unitless) for the 1000 Monte Carlo simulations.

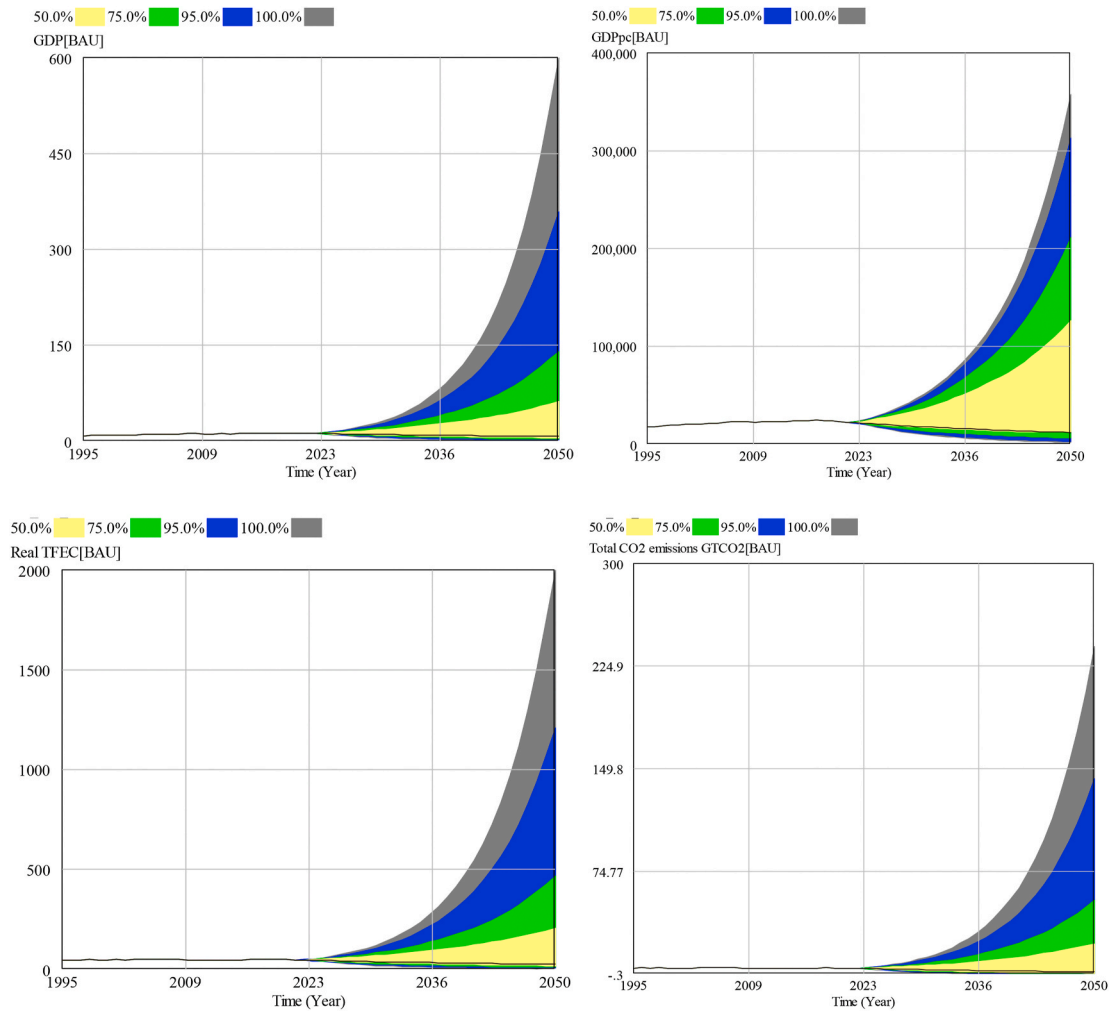


Fig. 3. From top-left to bottom-right, confidence bounds for output variables GDP (in  $10^{12}$  1995US\$), GDP per capita (in  $10^{12}$  1995US\$ per person), Total Final Energy Consumption (TFEC, in EJ) and total CO<sub>2</sub> emissions (GT of CO<sub>2</sub>) for the 1000 Monte Carlo simulations.

input parameter  $p_i$ , respectively, also at time  $t$ .

To get a single value for the whole simulated period, the Euclidean distances at all simulation times are added as follows (Eq. (8)):

$$E_t^{p_i, max-nom} = \sum_{t=1995}^{2050} E_t^{p_i, max-nom} \quad (8)$$

The resulting value is divided by the percentage of change of the perturbed parameter so that the Euclidean distances obtained for every input parameter are comparable (Eq. (9)):

$$\delta p_i^{max-nom} = \frac{p_i^{max} - p_i^{nom}}{p_i^{nom}} \quad (9)$$

The same procedure is done to obtain the time aggregated Euclidean distance between the minimum and nominal values of each input parameter  $p_i (E_t^{p_i, min-nom})$ , which are also divided by the percentage change of the minimum and nominal values of the input parameter ( $\delta p_i^{min-nom}$ ).

### 3. Results

#### 3.1. Uncertainty analysis

None of the 1000 Monte Carlo simulations failed to converge. Therefore, the minimum and maximum values of the input parameters shown in Table 1 correspond to the tested stability ranges of the model.

Figs. 2–5 present the confidence bounds around the mean of the distribution of each output variable for the 1000 Monte Carlo simulations. The black line corresponds to the evolution of the value of the variable obtained with nominal values of all inputs (BAU scenario). For practical reasons, only the plots of the 7 most representative output variables of the 15 listed in Table 4 are presented.

The values of the standard EROI obtained from the Monte Carlo Experiments start at ca. 11 in 2015 and by 2050 the spread goes from as low as ca. 7 to as high as 13.5 (Fig. 2). The distribution is uniform with a slight negative skew. On the other hand, the distributions for GDP, GDPpc, total final energy consumption (TFEC) and the CO<sub>2</sub> emissions are very similar (Fig. 3) and show a very large positive skew. Some of the simulations for these 4 output variables display positive exponential trends. The share of electricity produced from RES shows a large uncertainty with Platykurtic distribution (negative kurtosis) and a negative skew towards the end of the simulated period (Fig. 4). Finally, the uncertainty of the land requirements is again very large (Fig. 5), and in this case the top limit is the result of the decreasing land availability which acts as a ceiling for further renewable capacity installation.

#### 3.2. Sensitivity exploration

Spider plots are used to qualitatively assess the impact of the perturbation of the parameters from Tables 2 and 3 on the values of the output variables from Table 4 in 2050. Fig. 6 shows how 6 of the selected 15 model outputs are affected by the perturbations on the values of each

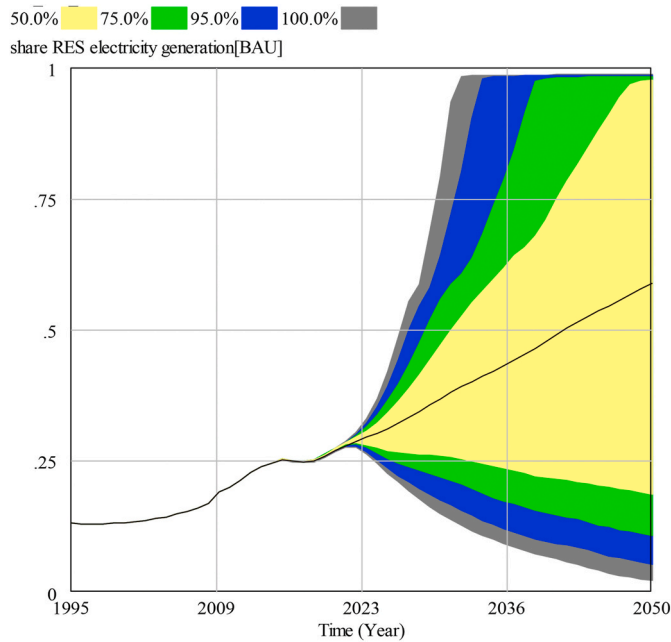


Fig. 4. Confidence bounds for the fraction of the total electricity generation produced from renewable sources for the 1000 Monte Carlo simulations.

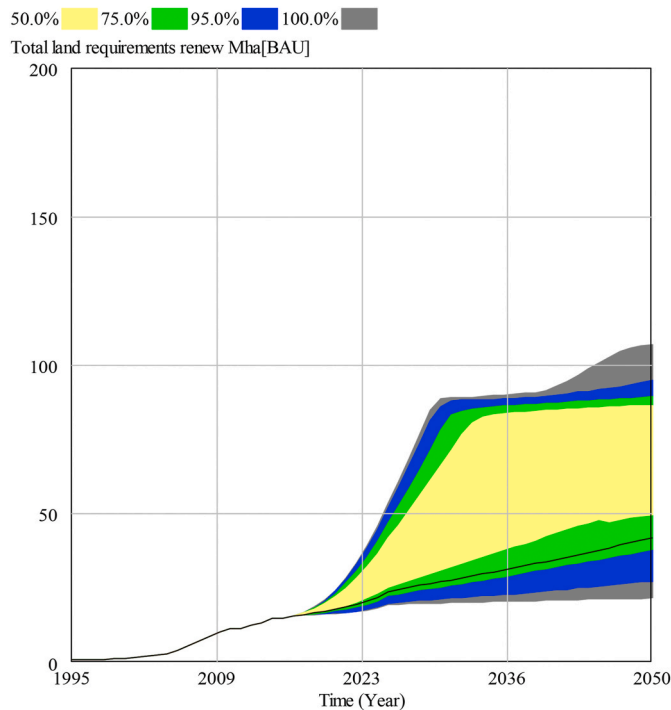


Fig. 5. Confidence bounds for the total land required by renewable power plants (in Mha) for the 1000 Monte Carlo simulations.

input parameter.

All output parameters were affected by the individual perturbation of most inputs, though in different degrees. With only a few exceptions, increasing or decreasing the input parameter value by the same percentage did not result in proportional increases or decreases in the output variables, showing the non-linear relation between inputs and outputs of the model.

Perturbations on the variation of the non-energy use of liquids, solids and gases (*variation\_non-energy\_use*) significantly affected all model

outputs. The impact was particularly clear in the case of the output variable GDP. For all output variables except for the “share of RES in the electricity generation”, lower values of this parameter resulted in higher values of the outputs.

Input parameter *min\_energy\_intensity\_vs\_initial* represents the minimum value that the energy intensity of each economic sector can potentially reach, with respect to their intensities in 2009. Perturbations above and below its nominal value (30%) also produced noticeable changes in the output variables, being the system’s EROI and the total final energy consumption (TFEC) the output variables more significantly impacted. CO<sub>2</sub> emissions also increased for higher values of this parameter.

Parameter *threshold\_remaining\_potential\_new\_capacity*, corresponds to the threshold value of the remaining potential capacities of the RE for electricity generation below which the planning of new renewable infrastructure starts to decline due to decreasing returns. Increasing the nominal value of this parameter (0.5) had a negative impact on the share of RES and reduced land requirements.

Input parameter *a1\_coef\_th*, with units of EJ/10<sup>12</sup> 1995 US\$, is a coefficient involved in the calculation of the variation of the energy intensities of the household transport sector resulting from using different energy carriers (gas, liquids and electric batteries), and had a nominal value of 1.46. This parameter had a negative relation with TFEC, CO<sub>2</sub> emissions and the standard EROI of the system.

CO<sub>2</sub> emissions were greatly affected by the minimum value taken by the capacity factor (*min\_cp\_nuclear*, nominal value = 0.6), which represents the average fraction of the time that nuclear plants are producing energy with respect to the total time. The value of this parameter may tip the balance between requiring new nuclear capacity or not.

Tables 5–7 show the highest three values of the normalised RMSD between each output variable obtained with the minimum and maximum values of the range of each input parameter. For each output variable (columns in the tables), the higher the value of the normalised RMSD, the more sensitive it is to changes in the perturbed parameter (rows in the tables).

Table 8 shows to which perturbed parameter each output variable was most sensitive, based on the values of the normalised RMSD.

Table 9 shows that input parameter *min\_energy\_intensity\_vs\_initial* was in the top three of the most impacting parameters for all 15 outputs. Variable *variation\_nonxdashenergy\_use* and parameter *a1\_coef\_th* came second and third, being 8 and 7 times among the top three, respectively. These results confirm the qualitative results obtained with the spider plots.

Similar conclusions were drawn based on the values of the time-aggregated Euclidian distances of all outputs obtained with the minimum and nominal and maximum values of each input parameter (Fig. 7). Accordingly, the most impacting of the selected input parameters was the *min\_energy\_intensity\_vs\_initial*, followed by *a1\_coef\_th* and *min\_energy\_intensity\_vs\_initial.h*. Variable *variation\_nonxdashenergy\_use* came in at the 4<sup>th</sup> place.

On the other hand, perturbations in parameters *min\_lifetime\_ev\_batteries*, *exponent\_availability\_conv\_gas*, *share\_max\_of\_change\_vs\_historical\_mean\_rate* and *share\_max\_of\_change\_vs\_historical\_mean\_rate\_h* (see descriptions in Table 2) did not affect the analysed output variables in any particular way. Other parameters that had little impact on the outputs were *share\_res\_elec\_generation\_curtailedxandxsored*, *share\_gasxdivxcoalplusxgasx\_for\_heat\_plants* and *esoi\_phs\_depleted\_potential*.

#### 4. Discussion

As Ref. [42] points out, it must be noted that sensitivity and uncertainty analysis are themselves uncertain, because there is considerable uncertainty in quantifying the uncertainty in input factors. Hence, the criteria for the selection of the input parameter ranges must be transparent. In this work, the minimum and maximum values of the input



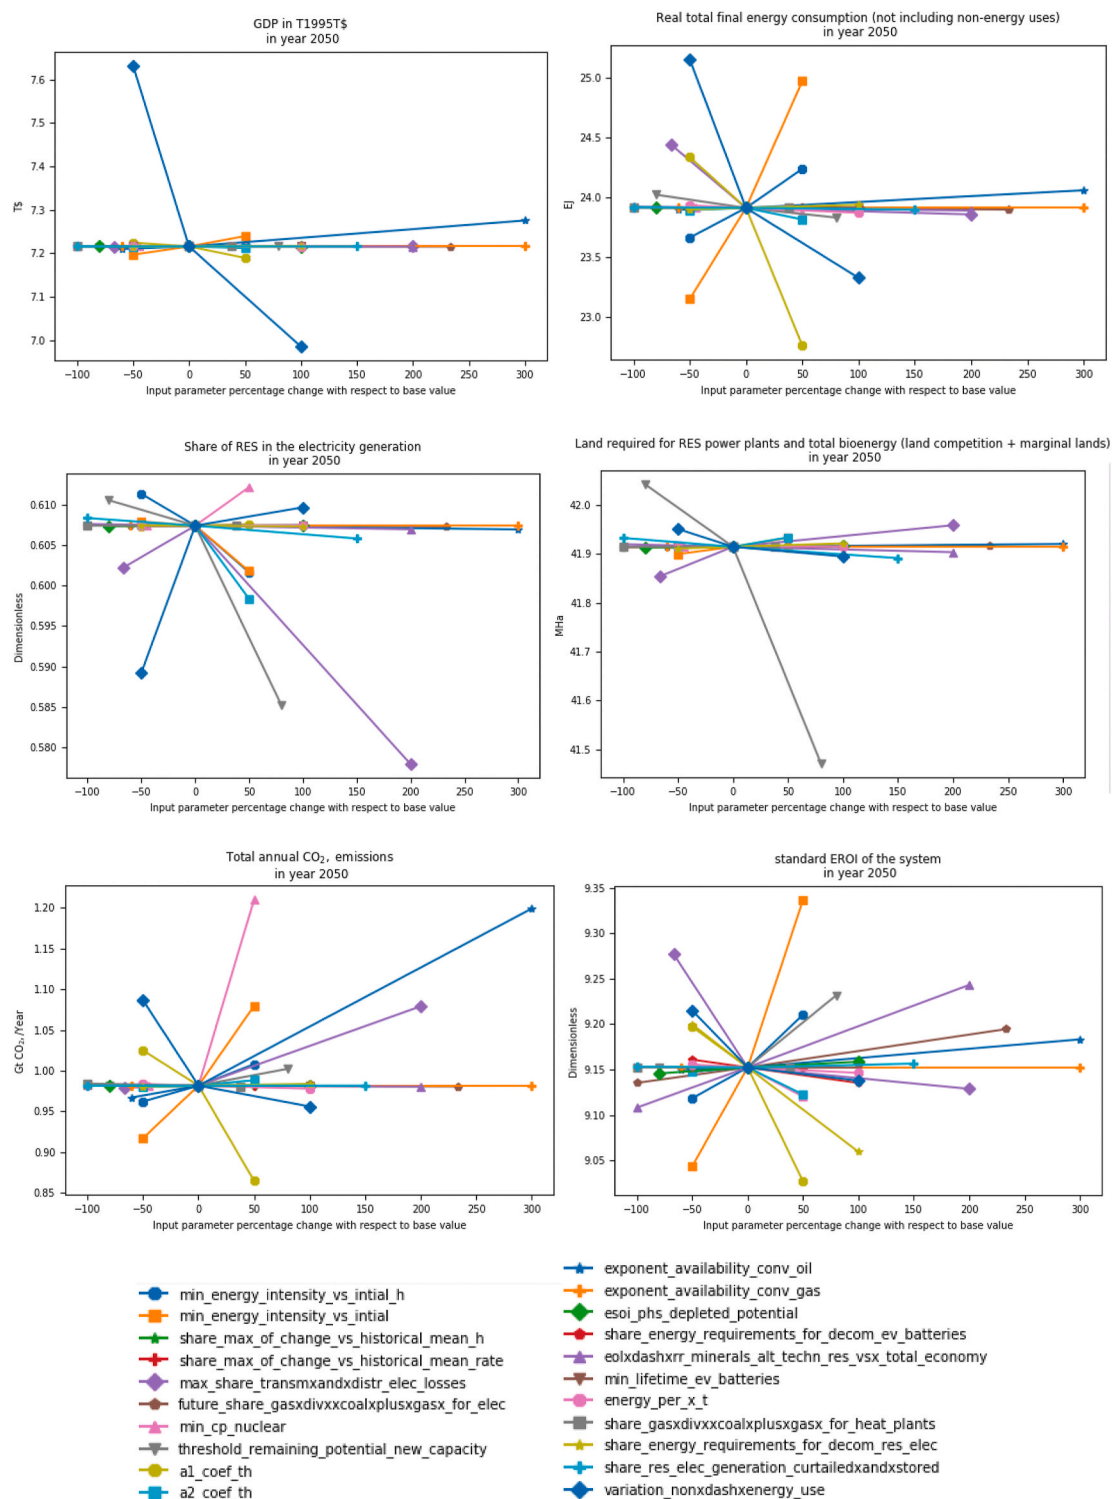


Fig. 6. From top-left to bottom-right, values of the GDP, final energy consumption, share of RE in electricity generation, land requirements for RE power plants, annual CO<sub>2</sub> emissions and standard EROI of the system in 2050, obtained by changing the model parameter values by a specified percentage with respect to the base value (x axis).

parameters for the uncertainty analysis (Table 1) were selected using two criteria: they should be sufficiently far apart to allow testing the model for stability, but at the same time remain realistic. Most of the parameters of the list correspond to the techno-ecological potentials for the different RES technologies, whose values vary orders of magnitude depending on the bibliography. The list also includes the annual increase in the installed capacity of the same technologies which, at least

on the first stages of the transition, will not be affected by biophysical (materials or energy scarcity) or technical constraints (grid integration) and hence have been assigned wide ranges. Although a 20% increase in the desired GDPpc may seem unrealistic, this parameter is not the actual GDPpc, but rather is the expected per capita economic output, which is constrained by resource availability and climate change impacts. On the other hand, for the sensitivity exploration the ranges given to the input

**Table 5**

Values of the RMSD generated by perturbing each input parameter (rows) for output variables gdp, gdppc, tpes\_intensity\_ej\_tdollar, total\_fe\_elec\_generation\_twh and share\_res\_electricity\_generation (columns). The values of RMSD are normalised by the percentage change of the input parameter. Only the highest three values are shown.

Input parameter	Output parameter				
	gdp	gdppc	real_tfec	tpes_intensity_ej_tdollar	share_res_electricity_generation
min_energy_intensity_vs_initial	2,74E-02	5,11E+01	1,57E+00	2,13E-01	9,70E-03
a1_coef_th	1,89E-02	3,50E+01	7,64E-01	8,39E-02	–
share_energy_requirements_for_decom_res_elec	–	–	–	–	–
variation_nonxdashxenergy_use	1,48E-01	2,73E+01	4,55E-01	1,23E-01	–
a2_coef_th	–	–	–	–	–
min_energy_intensity_vs_initial_h	–	–	–	–	–
threshold_remaining_potential_new_capacity	–	–	–	–	1,04E-02
max_share_transmxandxdistr_elec_losses	–	–	–	–	8,93E-03
min_cp_nuclear	–	–	–	–	–
future_share_gasxdivvxxcoalplusxgasx_for_elec	–	–	–	–	–

**Table 6**

Values of the RMSD generated by perturbing each input parameter (rows) for output variables real\_fe\_consumption\_by\_fuel (heat, liquids and solids) and total\_fe\_elec\_generation\_twh (columns). The values of RMSD are normalised by the percentage change of the input parameter. Only the highest three values are shown.

Input parameter	Output parameter					
	real_fe_consumption_by_fuel					total_fe_elec_generation_twh
	electricity	heat	gases	liquids	solids	
min_energy_intensity_vs_initial	4,23E-01	6,27E-01	2,67E-01	7,56E-01	2,67E-01	1,01E+02
a1_coef_th	–	–	2,99E-01	9,35E-01	–	–
share_energy_requirements_for_decom_res_elec	–	–	–	–	–	–
variation_nonxdashxenergy_use	–	2,18E-01	–	2,52E-01	8,91E-02	1,01E+02
a2_coef_th	2,99E-01	–	–	–	–	–
min_energy_intensity_vs_initial_h	2,67E-01	3,54E-01	1,89E-01	–	2,31E-01	–
threshold_remaining_potential_new_capacity	–	–	–	–	–	–
max_share_transmxandxdistr_elec_losses	–	–	–	–	–	1,12E+02
min_cp_nuclear	–	–	–	–	–	–
future_share_gasxdivvxxcoalplusxgasx_for_elec	–	–	–	–	–	–

**Table 7**

Values of the RMSD generated by perturbing each input parameter (rows) for output remaining\_potential\_tot\_res\_elec, total\_land\_requirements\_renew\_mha, total\_co2\_emissions\_gtco2 and eroist\_system (columns). The values of RMSD are normalised by the percentage change of the input parameter. Only the highest three values are shown.

Input parameter	Output parameter			
	remaining_potential_tot_res_elec	total_land_requirements_renew_mha	total_co2_emissions_gtco2	eroist_system
min_energy_intensity_vs_initial	3,30E-04	1,51E-02	1,58E-01	2,35E-01
a1_coef_th	–	–	–	6,81E-02
share_energy_requirements_for_decom_res_elec	–	–	–	5,58E-02
variation_nonxdashxenergy_use	–	–	–	–
a2_coef_th	–	–	–	–
min_energy_intensity_vs_initial_h	–	–	–	–
threshold_remaining_potential_new_capacity	8,97E-04	1,62E-01	–	–
max_share_transmxandxdistr_elec_losses	3,51E-04	1,47E-02	–	–
min_cp_nuclear	–	–	1,27E-01	–
future_share_gasxdivvxxcoalplusxgasx_for_elec	–	–	1,03E-01	–

parameters are less relevant, since all output perturbations are normalised by the percentage of change of the input parameter with respect to its nominal value.

#### 4.1. Uncertainty analysis

The analysis of the 1000 Monte Carlo simulations shows that uncertainty increases over time and the confidence bounds become wider for all output variables analysed. In other words, uncertainty widens as the projected output includes less of the known past. This behaviour is to be partly expectable because some of the tweaked input parameters are constant rates (e.g. growth rate of installed capacity of the different RE technologies).

The EROI of the system disperses from the initial value of ca. 11:1 in 2015 to values between 7:1 to 13.5:1 in 2050 (Fig. 2). Since the EROI of

renewable energy generation technologies are nowadays smaller (on average) than those of fossil fuels [38], the lower values observed may correspond to scenarios with higher penetration of RE, therefore scenarios with higher implementation rates of the different RE technologies included in the model. Although the uncertainty for the EROI may seem relatively small, the difference between the highest and the lowest values of the distribution mark the difference between a prosperous society and one at the brink of collapse. Indeed, the lowest EROI values obtained are just above the critical value of 5:1, considered to be the lowest possible value to sustain human societies [43].

The nexus between GDP, energy consumption and emissions is well known and has been vastly studied since the 70's [44]. The correlation between the three is clearly seen from the similarity between the distributions of output variables GDP (and GDPPc), final energy consumption and CO<sub>2eq</sub> emissions (Fig. 3). Although the uncertainty of

**Table 8**

Input parameters that had the largest impact on the value of each output variable, based on the RMSD.

Output parameter	Perturbed parameter
eroist_system	min_energy_intensity_vs_initial
gdp	variation_nonxdashenergy_use
gdppc	variation_nonxdashenergy_use
real_fe_consumption_by_fuel [electricity]	min_energy_intensity_vs_initial
real_fe_consumption_by_fuel[gases]	a1_coef_th
real_fe_consumption_by_fuel[heat]	min_energy_intensity_vs_initial
real_fe_consumption_by_fuel[liquids]	a1_coef_th
real_fe_consumption_by_fuel[solids]	min_energy_intensity_vs_initial
real_tfec	min_energy_intensity_vs_initial
remaining_potential_tot_res_elec	threshold_remaining_potential_new_capacity
share_res_electricity_generation	threshold_remaining_potential_new_capacity
total_co2_emissions_gtco2	min_energy_intensity_vs_initial
total_fe_elec_generation_twh	min_energy_intensity_vs_initial
total_land_requirements_renew_mha	threshold_remaining_potential_new_capacity
tpes_intensity_ej_dollar	min_energy_intensity_vs_initial

**Table 9**

Summary of tables Tables 5–7, representing how many times each perturbed parameter was among the top 3 parameters creating the maximum differences when all outputs are considered.

Parameter name	Times among the top 3
min_energy_intensity_vs_initial	15
variation_nonxdashenergy_use	8
a1_coef_th	7
min_energy_intensity_vs_initial_h	4
max_share_transmxandxdistr_elec_losses	4
threshold_remaining_potential_new_capacity	3
share_energy_requirements_for_decom_res_elec	1
a2_coef_th	1
min_cp_nuclear	1
future_share_gasxdivvcoalplusgasx_for_elec	1

these outputs is very large, most of the simulations (confidence bound of 50%) did not reach exponential trends. The GDPpc had more uncertainty than the GDP, because the uncertainty on the population adds to the uncertainty of the GDP itself. In the MEDEAS models, the causation between GDP, energy consumption and CO<sub>2</sub> emissions is bidirectional: more economic activity (measured in GDP) results in more energy consumption, hence higher CO<sub>2</sub> emissions; high atmospheric CO<sub>2</sub> concentrations increase the energy demand for adaptation to climate change and if the energy supply cannot match the increased demand, the GDP is negatively affected. Fig. 3 also shows that none of the biophysical constraints implemented in the model impede the exponential growth of the economy under certain combinations of input parameters. Higher population growth rates are also responsible for higher economic and energetic demand and CO<sub>2</sub> emissions.


The uncertainty of the share of electricity generation from RES is very large (Fig. 4), and depends not only on the deployment rates but also on the techno ecological potentials of each RES technology. Also, in a scenario of high population and high economic growth (high energy demand) with less RES penetration (little electricity produced from RES) will have very low shares.

Finally, the large uncertainty of the total land requirements (Fig. 5) comes also from the uncertainty in the penetration rates of each technology, their share (some technologies take more land than others), their techno-ecological potentials and the land available (once land is fully occupied, no more RE infrastructure can be built).

4.2. Sensitivity exploration

Very similar results were obtained by using the three different sensitivity measures: the RMSD, the Euclidean distances and the Spider plots. The later measures only a punctual distance at year 2050, but clearly showed the non-linear dependency between inputs and outputs [45] (Fig. 7). The RMSD measures distances for each individual input-output relationship across all simulated times (1995–2050) while the Euclidean distance is the aggregated distance of the vector of all outputs of each simulation, aggregated over time.

Combining the results obtained with the three methodologies, the

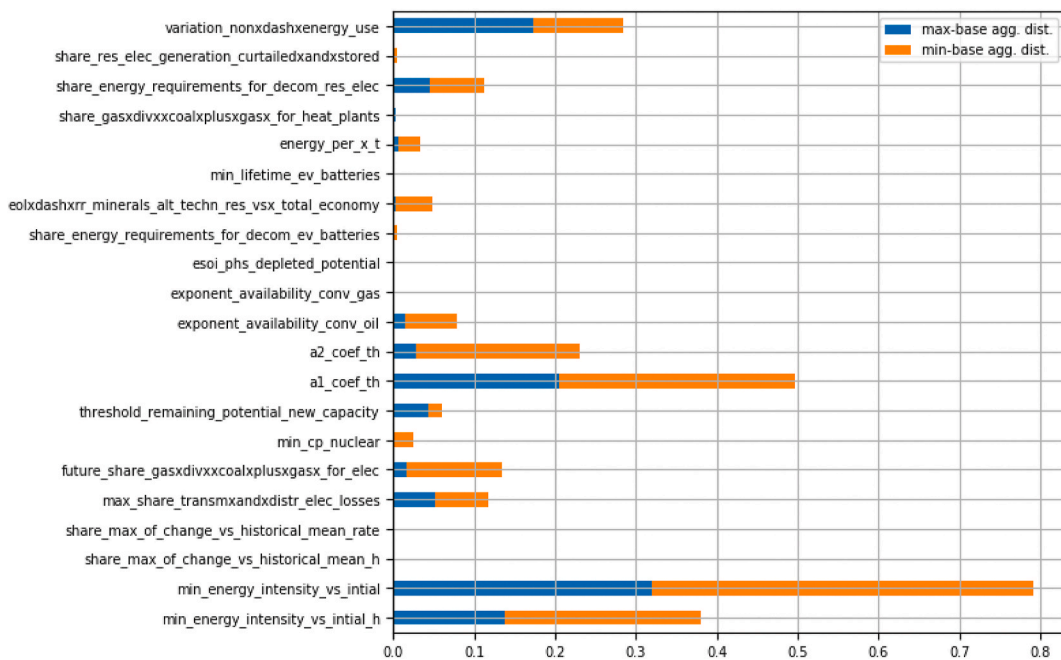

**Fig. 7.** Distances between the simulation results obtained with the minimum and nominal (base in the legend) values and the maximum and nominal (base in the legend) values aggregated for all output parameters, and normalised by the percentage change of the perturbed parameter with respect to the base value. Larger values correspond to greater distances between the compared simulation results.

most impacting parameters on the model outputs were *min\_energy\_intensity\_vs\_initial*, *min\_energy\_intensity\_vs\_initial\_h*, *a1\_conf\_th* and *variation\_nonxdashxenergy\_use*.

Parameters *min\_energy\_intensity\_vs\_initial* and *min\_energy\_intensity\_vs\_initial\_h* affect the values of the energy intensities of all economic sectors and households, respectively. The higher their value, the lower potential efficiency gains, which result in higher TFE and CO<sub>2</sub> emissions. In addition, the lower the efficiency, the less energy can be destined to build new RE infrastructure, which results in a reduction of the share of RE electricity. On the other hand, the large impact of *a1\_conf\_th* shows the importance of the household transport sector in the whole energy system. To this regard [46] found that a 100% renewable road transport providing the same service as in 2014 would demand 69% less energy.

Finally, the actual demand for fossil fuels for non-energy purposes, described in the model with variable *variation\_non-energy\_use*, is poorly understood [47]. Following [47], the demand for each final fuel (liquids, gases and solids) is endogenously calculated as a linear function of the historic GDP, although this assumption is very uncertain. Therefore, the high impact of this variable on the outputs comes as a result of its structural uncertainty, rather than parametric uncertainty [20].

Based on these results, these 4 parameters will be key when trying to fit simulation results between the MEDEAS and other models. On the contrary, seven of the input parameters were seen to have little impact on the results and will be fixed in future GSA on the MEDEAS models.

The OAT analysis, although still one of the most widely used techniques for sensitivity analysis in many domains due to its simplicity and low computational cost, is known to have drawbacks when applied to non-linear models [27]. In addition, when using OAT technique a large fraction of the input parameter space is left unanalysed and the effects of input parameters interactions cannot be evaluated [22,48]. Acknowledging these weaknesses, in this work this methodology was used as a previous step, to discard those parameters with negligible effects on the model outputs in a subsequent global sensitivity analysis.

## 5. Conclusions

Uncertainty is at the origin of the main criticisms made to IAM models, and unless adequately assessed, it may hold back their use for policy design. Thus, uncertainty (UA) and sensitivity analysis (SA) are key to give robustness to IAMs outputs.

The current work complements the previous work done in Ref. [37], in which the pymedeas models were introduced and an exploratory analysis was performed to assess the impacts of changing model hypotheses. The UA performed here assesses the robustness of the scenarios chosen in the previous work, while the SA serves to identify the most relevant parameters within each scenario. This methodology (hypotheses-scenarios-UA-SA) gives a useful procedure for future energy system and IAMs models analysis.

Results from the Monte Carlo simulations indicate that uncertainty in the outputs is large and increases over time, especially for scenarios with high economic growth expectations. These results also highlight the dangers on the climate and the environment of sustaining a growing economy with fossil fuels. On the other hand, parameters directly affecting sectorial energy efficiencies and households' transport energy use had the larger impact on the model outputs. These are known to be key elements to achieve the energy transition, and the results of this work support all efforts being made by European policy-makers to this regard. The use of fossil fuels for non-energetic purposes had also a big impact on model projections, but in this case it was attributed to a structural uncertainty rather than a parametric uncertainty.

This work demonstrates how the uncertainty propagates in highly non-linear models with different feedbacks at different sub-models levels [42]. The analysis performed here also highlights the limitations of the system dynamics approach, which works very well for capturing the inner system non-linear feedbacks, but when dealing with rapidly

increasing non-linear interactions, uncertainty becomes a 'demon in the machine' that affects the reliability of the model projections [49]. In this sense this work contributes to the analysis of limitations of complex system dynamics models and IAMs [50] in general and in particular to the MEDEAS models.

Finally, the complex interactions between different parameters and strong nonlinearities between inputs and outputs found in this work justify a subsequent and more computationally intensive GSA, that will benefit from the factor prioritization made here.

## Credit statement

**Roger Samsó:** Conceptualization, Software, Methodology, Formal analysis, Investigation, Visualization, Writing - Original Draft. **Ignacio de Blas:** Conceptualization, Software, Methodology, Formal analysis, Investigation, Visualization. **Iliaria Perissi:** Conceptualization, Writing - Review & Editing. **Gianluca Martelloni:** Conceptualization, Writing - Review & Editing. **Jordi Solé:** Conceptualization, Writing - Review & Editing, Methodology, Supervision, Project administration, Funding acquisition.

## Declaration of competing interest

The authors declare that they have no known competing financial interests or personal relationships that could have appeared to influence the work reported in this paper.

## Acknowledgements

This work has been financed by the MEDEAS project, European Union's Horizon 2020 research and innovation program, grant agreement No 691287 of the Framework Program for Research and Innovation actions, H2020 LCE-21-2015.

## References

- [1] K.L. Nash, C. Cvitanovic, E.A. Fulton, B.S. Halpern, E.J. Milner-Gulland, R. A. Watson, J.L. Blanchard, Planetary boundaries for a blue planet, *Nat. Ecol. Evol.* 1 (2017) 1625–1634, <https://doi.org/10.1038/s41559-017-0319-z>.
- [2] J. Rockstrom, W. Steffen, K. Noone, F.S.I.I. Chapin, B. Nykvist, C.A. de Wit, T. Hughes, S. van der Leeuw, H. Rodhe, S. Sorlin, P.K. Snyder, R. Costanza, U. Svedin, M. Falkenmark, L. Karlberg, R.W. Correll, V.J. Fabry, J. Hansen, B. Walker, D. Liverman, K. Richardson, P. Crutzen, J. Foley, Exploring the safe operating space for humanity, *Ecol. Soc.* 14 (2009) 32, <https://doi.org/10.1038/461472a>.
- [3] J. Rotmans, M. van Asselt, Uncertainty in integrated assessment modelling: a labyrinthine path, *Integrated Assess.* 2 (2001) 43–55, <https://doi.org/10.1023/A:1011588816469>.
- [4] S. Pfenniger, J. DeCarolis, L. Hirth, S. Quoilin, I. Staffell, The importance of open data and software: is energy research lagging behind? *Energy Pol.* 101 (2017) 211–215, <https://doi.org/10.1016/j.enpol.2016.11.046>.
- [5] K. Riahi, D.P. van Vuuren, E. Kriegler, J. Edmonds, B.C. O'Neill, S. Fujimori, N. Bauer, K. Calvin, R. Dellink, O. Fricko, W. Lutz, A. Popp, J.C. Cuaresma, S. Kc, M. Leimbach, L. Jiang, T. Kram, S. Rao, J. Emmerling, K. Ebi, T. Hasegawa, P. Havlik, F. Humpenöder, L.A. Da Silva, S. Smith, E. Stehfest, V. Bosetti, J. Eom, D. Gernaat, T. Masui, J. Rogelj, J. Streffer, L. Drouet, V. Krey, G. Luderer, M. Harmsen, K. Takahashi, L. Baumstark, J.C. Doelman, M. Kainuma, Z. Klimont, G. Marangoni, H. Lotze-Campen, M. Obersteiner, A. Tabeau, M. Tavoni, The Shared Socioeconomic Pathways and their energy, land use, and greenhouse gas emissions implications: an overview, *Global Environ. Change* 42 (2017) 153–168, <https://doi.org/10.1016/j.gloenvcha.2016.05.009>.
- [6] D. Diaz, F. Moore, Quantifying the economic risks of climate change, *Nat. Clim. Change* 7 (2017) 774–782, <https://doi.org/10.1038/nclimate3411>.
- [7] S. Dietz, N. Stern, Endogenous growth, convexity of damage and climate risk: how Nordhaus' framework supports deep cuts in carbon emissions, *Econ. J.* 125 (2015) 574–620, <https://doi.org/10.1111/econj.12188>.
- [8] H.K. Ringkjøb, P.M. Haugan, I.M. Solbrekke, A review of modelling tools for energy and electricity systems with large shares of variable renewables, *Renew. Sustain. Energy Rev.* 96 (2018) 440–459, <https://doi.org/10.1016/j.rser.2018.08.002>.
- [9] S. Scricciu, A. Rezaei, R. Mechler, On the economic foundations of green growth discourses: the case of climate change mitigation and macroeconomic dynamics in economic modeling, *Wiley Interdiscip. Rev. Energy Environ.* 2 (2013) 251–268, <https://doi.org/10.1002/wene.57>.
- [10] P. Moriarty, D. Honnery, Can renewable energy power the future? *Energy Pol.* 93 (2016) 3–7, <https://doi.org/10.1016/j.enpol.2016.02.051>.

- [11] A. Valero, A. Valero, G. Calvo, A. Ortego, Material bottlenecks in the future development of green technologies, *Renew. Sustain. Energy Rev.* 93 (2018) 178–200, <https://doi.org/10.1016/j.rser.2018.05.041>.
- [12] Quintel Intelligence, Energy transition model (ETM), (n.d.). <https://energytransitionmodel.com/> (accessed March 9, 2020).
- [13] C. Heaps, Long-range Energy Alternatives Planning (LEAP) System. [Software Version: 2018.1.40], Stockholm Environment Institute, Somerville, MA, USA, 2016. <https://www.energycommunity.org>.
- [14] Energy Information Administration, The National Energy Modeling System : an Overview 2018, 2019. Washington, DC 20585, [https://www.eia.gov/outlooks/aeo/nems/overview/pdf/0581\(2018\).pdf](https://www.eia.gov/outlooks/aeo/nems/overview/pdf/0581(2018).pdf).
- [15] J. Despres, K. Keramidis, A. Schmitz, A. Kitous, B. Schade, A.R. Diaz-Vazquez, S. Mima, H.P. Russ, T. Wiesenthal, POLES-JRC Model Documentation - Updated for 2018, Joint Research Centre (Seville Site), 2018. <https://econpapers.repec.org/RePEc:ipt:wpajrc:113757>.
- [16] Natural Resources Canada, RETScreen, 2019. <https://www.nrcan.gc.ca/maps-tools-publications/tools/data-analysis-software-modelling/retscreen/7465>. (Accessed 9 March 2020).
- [17] International Energy Agency, World Energy Model Documentation (2019 Version), 2019, p. 88. [https://iea.blob.core.windows.net/assets/d496ff6a-d4ca-4f6a-9471-220adddf0efd/WEM\\_Documentation\\_WEO2019.pdf](https://iea.blob.core.windows.net/assets/d496ff6a-d4ca-4f6a-9471-220adddf0efd/WEM_Documentation_WEO2019.pdf). (Accessed 10 March 2020).
- [18] M.K. Hubbert, Energy from fossil fuels, *Science* (80-. ) 109 (1949) 103–109.
- [19] J. Nieto, Ó. Carpintero, L.J. Miguel, I. de Blas, Macroeconomic modelling under energy constraints: global low carbon transition scenarios, *Energy Pol.* 137 (2020) 111090, <https://doi.org/10.1016/j.enpol.2019.111090>.
- [20] J. DeCarolis, H. Daly, P. Dodds, I. Keppo, F. Li, W. McDowall, S. Pye, N. Strachan, E. Trutnevtey, W. Usher, M. Winning, S. Yeh, M. Zeyringer, Formalizing best practice for energy system optimization modelling, *Appl. Energy* 194 (2017) 184–198, <https://doi.org/10.1016/j.apenergy.2017.03.001>.
- [21] T. Mai, J. Bistline, Y. Sun, W. Cole, C. Marcy, C. Namovovic, D. Young, The role of input assumptions and model structures in projections of variable renewable energy: a multi-model perspective of the U.S. electricity system, *Energy Econ.* 76 (2018) 313–324, <https://doi.org/10.1016/j.eneco.2018.10.019>.
- [22] F. Branger, L.G. Giraudet, C. Guivarch, P. Quirion, Global sensitivity analysis of an energy-economy model of the residential building sector, *Environ. Model. Softw.* 70 (2015) 45–54, <https://doi.org/10.1016/j.envsoft.2015.03.021>.
- [23] A. Soto Martinez, M.F. Jentsch, Sensitivity and uncertainty analysis of models for determining energy consumption in the residential sector, in: 14th Int. Conf. IBPSA - Build. Simul. 2015, BS 2015, Conf. Proc., 2015, pp. 1609–1616.
- [24] B. Anderson, E. Boronovo, M. Galeotti, R. Roson, Uncertainty in integrated assessment modelling: can global sensitivity analysis Be of help? *SSRN Electron. J.* (2012) <https://doi.org/10.2139/ssrn.2141142>.
- [25] Y. Cai, A.H. Sanstad, Model uncertainty and energy technology policy: the example of induced technical change, *Comput. Oper. Res.* 66 (2016) 362–373, <https://doi.org/10.1016/j.cor.2015.07.014>.
- [26] A. Saltelli, G. Bammer, I. Bruno, E. Charters, M. Di Fiore, E. Didier, W.N. Espeland, J. Kay, S. Lo Piano, D. Mayo, R.P. Jr, T. Portaluri, T.M. Porter, A. Puy, I. Rafols, J. R. Ravetz, E. Reinert, D. Sarewitz, P.B. Stark, A. Stirling, J. van der Sluijs, P. Vineis, Five ways to ensure that models serve society: a manifesto Setting the agenda in research, *Nature* (2020) 582. <https://go.nature.com/3kqvutz>.
- [27] A. Saltelli, P. Annoni, How to avoid a perfunctory sensitivity analysis, *Environ. Model. Softw.* 25 (2010) 1508–1517, <https://doi.org/10.1016/j.envsoft.2010.04.012>.
- [28] A. Gambhir, I. Butnar, P.H. Li, P. Smith, N. Strachan, A review of criticisms of integrated assessment models and proposed approaches to address these, through the lens of BECCs, *Energies* 12 (2019) 1–21, <https://doi.org/10.3390/en12091747>.
- [29] US Environmental Protection Agency, Guidance on the Development, Evaluation, and Application of Environmental Models, 2009, p. 99. [https://www.epa.gov/sites/production/files/2015-04/documents/cred\\_guidance\\_0309.pdf](https://www.epa.gov/sites/production/files/2015-04/documents/cred_guidance_0309.pdf). (Accessed 10 March 2020).
- [30] F. Hedenus, D. Johansson, K. Lindgren, A critical assessment of energy - economy - climate models for policy analysis, *J. Appl. Econ. Bus. Res.* 3 (2013) 118–132.
- [31] S. Pye, N. Sabio, N. Strachan, An integrated systematic analysis of uncertainties in UK energy transition pathways, *Energy Pol.* 87 (2015) 673–684, <https://doi.org/10.1016/j.enpol.2014.12.031>.
- [32] F. Hedenus, S. Karlsson, C. Azar, F. Sprei, Cost-effective energy carriers for transport - the role of the energy supply system in a carbon-constrained world, *Int. J. Hydrogen Energy* 35 (2010) 4638–4651, <https://doi.org/10.1016/j.ijhydene.2010.02.064>.
- [33] J. Cochran, T. Mai, M. Bazilian, Meta-analysis of high penetration renewable energy scenarios, *Renew. Sustain. Energy Rev.* 29 (2014) 246–253, <https://doi.org/10.1016/j.rser.2013.08.089>.
- [34] G. Martelloni, I. Perissi, F. Di Patti, S. Falsini, U. Bardi, MEDEAS-World model calibration for the study of the energy transition, *PuntOorg Int. J.* 4 (2020) 119–140, <https://doi.org/10.19245/25.05.pij.4.2.5>.
- [35] I. Blas De, I. Capellán-Pérez, O. Carpintero, C. De Castro, F. Frechoso, L.F. Lobejón, P.L.L. Huertas, M. Mediavilla, L.J. Miguel, J. Nieto, P.R. González, MEDEAS European Model. Deliverable 4.2 (D14) of the MEDEAS Project, 2018, 174, <https://medeas.eu/system/files/documentation/files/D4.2%20D14%29%20MEDEAS%20European%20Model.pdf>. (Accessed 10 March 2020).
- [36] I. Capellán-Pérez, I. de Blas, J. Nieto, C. de Castro, L.J. Miguel, Ó. Carpintero, M. Mediavilla, L.F. Lobejón, N. Ferreras-Alonso, P. Rodrigo, F. Frechoso, D. Álvarez-Antelo, MEDEAS: a new modeling framework integrating global biophysical and socioeconomic constraints, *Energy Environ. Sci.* (2020) 986–1017, <https://doi.org/10.1039/C9EE02627D>.
- [37] J. Solé, R. Samsó, E. García-Ladona, A. García-Olivares, J. Ballabrera, T. Madurell, A. Turiel, O. Osychenko, D. Álvarez, U. Bardi, M. Baumann, K. Buchmann, I. Capellán-Pérez, M. Cerny, O. Carpintero, I. de Blas, C. De Castro, J.-D. De Lathouwer, C. Duce, L. Egger, J.M. Enríquez, S. Falsini, K. Feng, N. Ferreras, F. Frechoso, K. Hubacek, A. Jones, R. Kacliková, C. Kershner, C. Kimmich, L. F. Lobejón, P.L. Lomas, G. Martelloni, M. Mediavilla, L.J. Miguel, D. Natalini, J. Nieto, A. Nikolaeov, G. Parrado, S. Papagianni, I. Perissi, C. Ploiner, L. Radulov, P. Rodrigo, L. Sun, M. Theofilidi, Modelling the renewable transition: scenarios and pathways for a decarbonized future using pymedeas, a new open-source energy systems model, *Renew. Sustain. Energy Rev.* 132 (2020) 110105, <https://doi.org/10.1016/j.rser.2020.110105>.
- [38] I. Capellán-Pérez, C. de Castro, L.J. Miguel González, Dynamic Energy Return on Energy Investment (EROI) and material requirements in scenarios of global transition to renewable energies, *Energy Strateg. Rev.* 26 (2019), <https://doi.org/10.1016/j.esr.2019.100399>.
- [39] I. Perissi, S. Falsini, U. Bardi, D. Natalini, M. Green, A. Jones, J. Solé, Potential European emissions trajectories within the global carbon budget, *Sustain. Times* 10 (2018), <https://doi.org/10.3390/su10114225>.
- [40] I. de Blas, L.J. Miguel, I. Capellán-Pérez, Modelling of sectoral energy demand through energy intensities in MEDEAS integrated assessment model, *Energy Strateg. Rev.* 26 (2019), <https://doi.org/10.1016/j.esr.2019.100419>.
- [41] R. Loulou, G. Goldstein, A. Kanudia, A. Lettita, U. Remme, Documentation for the TIMES Model, 2016, pp. 1–151. <https://iea-etsap.org/index.php/documentation>. (Accessed 9 March 2020).
- [42] A. Saltelli, K. Aleksankina, W. Becker, P. Fennell, F. Ferretti, N. Holst, S. Li, Q. Wu, Why so many published sensitivity analyses are false: a systematic review of sensitivity analysis practices, *Environ. Model. Softw.* 114 (2019) 29–39, <https://doi.org/10.1016/j.envsoft.2019.01.012>.
- [43] A.R. Brandt, How does energy resource depletion affect prosperity? Mathematics of a minimum energy Return on investment (EROI), *Biophys. Econ. Resour. Qual.* 2 (2017) 1–12, <https://doi.org/10.1007/s41247-017-0019-y>.
- [44] M. Ikegami, Z. Wang, The long-run causal relationship between electricity consumption and real GDP: evidence from Japan and Germany, *J. Pol. Model.* 38 (2016) 767–784, <https://doi.org/10.1016/j.jpmodel.2016.10.007>.
- [45] T. Wei, A review of sensitivity analysis methods in building energy analysis, *Renew. Sustain. Energy Rev.* 20 (2013) 411–419, <https://doi.org/10.1016/j.rser.2012.12.014>.
- [46] A. García-Olivares, J. Solé, O. Osychenko, Transportation in a 100% renewable energy system, *Energy Convers. Manag.* 158 (2018) 266–285, <https://doi.org/10.1016/j.enconman.2017.12.053>.
- [47] V. Daioglou, A.P.C. Faaij, D. Saygin, M.K. Patel, B. Wicke, D.P. Van Vuuren, Energy demand and emissions of the non-energy sector, *Energy Environ. Sci.* 7 (2014) 482–498, <https://doi.org/10.1039/c3ee42667j>.
- [48] F. Branger, L. Giraudet, C. Guivarch, P. Quirion, Sensitivity analysis of an energy-economy model of the residential building sector, *Environ. Model. Softw.* 70 (2015) 45–54, <https://doi.org/10.1016/j.envsoft.2015.03.021>.
- [49] A. Pastor, D.C.S. Vieira, F.H. Soudijn, O.Y. Edelenbosch, How uncertainties are tackled in multi-disciplinary science? A review of integrated assessments under global change, *Catena* 186 (2020) 104305, <https://doi.org/10.1016/j.catena.2019.104305>.
- [50] L. Prieg, D. Yumashev, Frameworks for dealing with climate and economic uncertainties in integrated assessment models, in: *Integr. Assess. Model. Others Clim. Policy Tools*, Oeconomia Editions, 2020.