

Review

# Biogas from Anaerobic Digestion as an Energy Vector: Current Upgrading Development

Raquel Iglesias <sup>1,\*</sup>, Raúl Muñoz <sup>2</sup>, María Polanco <sup>2</sup>, Israel Díaz <sup>2</sup>, Ana Susmozas <sup>1</sup>, Antonio D. Moreno <sup>1</sup>, María Guirado <sup>3</sup>, Nely Carreras <sup>3</sup> and Mercedes Ballesteros <sup>1</sup>

<sup>1</sup> Department of Energy, Research Centre for Energy, Environment and Technology (CIEMAT), 28040 Madrid, Spain; anaisabel.susmozas@ciemat.es (A.S.); david.moreno@ciemat.es (A.D.M.); m.ballesteros@ciemat.es (M.B.)

<sup>2</sup> Institute of Sustainable Processes, University of Valladolid, 47011 Valladolid, Spain; mutora@iq.uva.es (R.M.); maria@iq.uva.es (M.P.); israel.diaz@iq.uva.es (I.D.)

<sup>3</sup> Department of Environment, Research Centre for Energy, Environment and Technology (CIEMAT), 28040 Madrid, Spain; maria.guirado@ciemat.es (M.G.); nely.carreras@ciemat.es (N.C.)

\* Correspondence: raquel.iglesias@ciemat.es; Tel.: +34-91-346-6261

**Abstract:** The present work reviews the role of biogas as advanced biofuel in the renewable energy system, summarizing the main raw materials used for biogas production and the most common technologies for biogas upgrading and delving into emerging biological methanation processes. In addition, it provides a description of current European legislative framework and the potential biomethane business models as well as the main biogas production issues to be addressed to fully deploy these upgrading technologies. Biomethane could be competitive due to negative or zero waste feedstock prices, and competitive to fossil fuels in the transport sector and power generation if upgrading technologies become cheaper and environmentally sustainable.

**Keywords:** anaerobic digestion; biogas upgrading; biological methanation; CO<sub>2</sub> utilization; regulation; advanced biofuels



**Citation:** Iglesias, R.; Muñoz, R.; Polanco, M.; Díaz, I.; Susmozas, A.; Moreno, A.D.; Guirado, M.; Carreras, N.; Ballesteros, M. Biogas from Anaerobic Digestion as an Energy Vector: Current Upgrading Development. *Energies* **2021**, *14*, 2742. <https://doi.org/10.3390/en14102742>

Academic Editor: Byong-Hun Jeon

Received: 29 March 2021

Accepted: 6 May 2021

Published: 11 May 2021

**Publisher's Note:** MDPI stays neutral with regard to jurisdictional claims in published maps and institutional affiliations.



**Copyright:** © 2021 by the authors. Licensee MDPI, Basel, Switzerland. This article is an open access article distributed under the terms and conditions of the Creative Commons Attribution (CC BY) license (<https://creativecommons.org/licenses/by/4.0/>).

## 1. Introduction

Anaerobic digestion (AD) converts organic wastes into biogas. This bio-based product makes a full contribution to the main targets of the current energy transition by replacing fossil resources and reducing the methane emissions related to the disposal of biodegradable waste, thus reducing the amounts of greenhouse gas (GHG) emissions. Furthermore, the use of the resulting digestates for enriching agricultural soils also contributes to create carbon sinks.

After AD processes, the biogas can be upgraded to biomethane, which is considered an attractive renewable energy alternative to natural gas. Biogas upgrading to biomethane can help to meet current objectives on energy, environmental and waste management policies. Today, biomethane is usually used as fuel in the transport sector or injected into the gas grid, saving tons of CO<sub>2</sub>-equivalent emissions [1].

To become climate-neutral by 2050, the transport sector must decrease current GHG emissions by 90% [2]. In this context, the use of biofuels, such as bioethanol, biodiesel and biogas, may contribute to overcome this challenge [3]. On the other side, in the transition to renewable energy and transport systems, producers and consumers will deal with changes in the energy market and variable energy production timing. The integration of different energy vectors will be essential to cover the total energy demand, and biofuels such as biogas can play an important role of backup energy [4].

In the European Union (EU), the long-term decarbonization strategy expects an increase in biomass and waste-derived energy from 140 million tons of oil equivalent (Mtoe) in 2015 to over 250 Mtoe in 2050. From them, biogas will represent about 54–71 Mtoe. This

biogas will be mainly used in the primary sector since liquid biofuels will cover most of the estimated biofuel needs in the transport sector (about 40 Mtoe) [5].

In general, the operating costs of advanced biofuels depend heavily on the raw material. Here, the utilization of waste feedstock for biofuel production offers higher possibilities to place these products in the market at cost-competitive prices. Biomethane produced from waste streams via AD has currently the lowest cost (40–50 EUR/MWh) within advanced biofuels [1].

The composition of biogas depends on the redox state and the biodegradability of the organic matter and the type of AD process. It is mainly composed of methane and CO<sub>2</sub>, and it also contains water, nitrogen, hydrogen sulfide, ammonia, oxygen, siloxanes and particles in lower proportions. As an example, the anaerobic digestion of sewage sludge, municipal organic waste or livestock manure produces a biogas with 50–70% (v/v) CH<sub>4</sub>, 30–50% (v/v) CO<sub>2</sub>, 5–10% (v/v) H<sub>2</sub>O, <3% (v/v) N<sub>2</sub>, <1% (v/v) O<sub>2</sub>, <10,000 ppm H<sub>2</sub>S, <100 ppm NH<sub>3</sub>, <200 mg/m<sup>3</sup> hydrocarbons and <40 mg/m<sup>3</sup> siloxanes [6].

The use of biogas in the natural gas grid and transport sector requires high concentrations of CH<sub>4</sub>. Specifications in methane concentration and in the other minor components are in most international biomethane regulations [7]. These minor components must be removed to reach biogas composition specifications for each use by particular technologies. The valorization of biogas also includes a desulfurization and a drying process to remove hydrogen sulfide and water. In addition, corrosion in pipelines and engines can be produced by halocarbons and NH<sub>3</sub> and methylsiloxanes, which can form silicone oxide deposits during combustion, causing overheating, malfunctioning and abrasion of engines and valves [8,9].


Two major methods are considered for biogas post-treatment: (1) purification or cleaning, in which low concentrated components such as nitrogen (N<sub>2</sub>), oxygen (O<sub>2</sub>), hydrogen sulfide (H<sub>2</sub>S), volatile organic compounds (VOCs), siloxanes, ammonia (NH<sub>3</sub>) and carbon monoxide (CO) are removed; and (2) upgrading, which focuses on removing CO<sub>2</sub> to increase methane (CH<sub>4</sub>) concentration. As a result, biomethane product is composed of 95–99% CH<sub>4</sub> and 1–5% CO<sub>2</sub> without traces of H<sub>2</sub>S or siloxanes [10].

Several upgrading technologies have been developed for increasing the methane content of biogas, even at the commercial scale [11]. The present work aims to review the most important upgrading technologies, including physical absorption (water, organic solvent, and chemical scrubbing), pressure swing adsorption (PSA), membrane and cryogenic separation technologies and emerging biological methods such as hydrogenotrophic and photosynthetic biogas upgrading. In addition, biomass feedstock, the current regulatory framework and an overview of the potential business models for biogas and biomethane production are also discussed to promote biogas as an energy vector.

## 2. The Biogas Industry: Current Situation and Policy Framework

### 2.1. Overview of the Biogas Industry Sector

Biogas production via AD is a well-established technology that has been used since ancient times to provide heat and electricity in domestic households. Biogas can be produced from a wide variety of feedstocks, including animal manure, crop residues, wastewater sludge and the organic fraction of municipal and industrial solid waste [12]. In 2018, the production of biogas and biomethane was approximately 35 Mtoe worldwide. According to the International Energy Agency (IEA), this value only represents a small fraction of the estimated overall potential. The utilization of the full sustainable potential of biogas and biomethane is estimated to cover about 20% of the current global gas demand (3929.2 billion m<sup>3</sup> in 2019) [13]. Figure 1 shows the production of biogas by region and feedstock in 2018. It can be noted that most of the biogas production comes from crop residues and animal manure. Furthermore, it is also evident that Europe is currently the major biogas producer, followed by China and the United States [14].

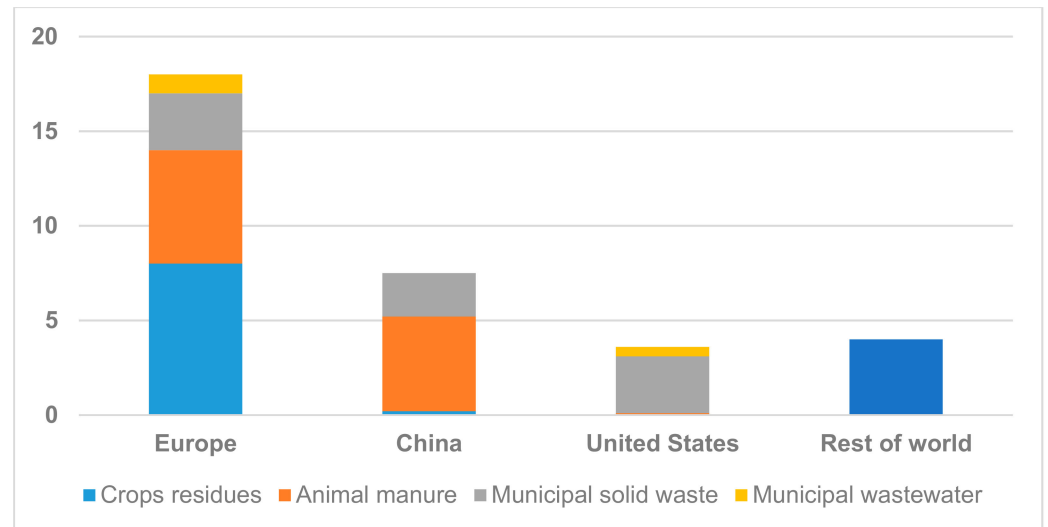

**Figure 1.** Production of biogas in Mtoe by region and feedstock in 2018. Source: IEA [14].

Europe has been constantly increasing the number of biogas plants since 2009. In 2019, there were 18,943 biogas plants operating in Europe, representing a 4% increase from the previous year [15,16]. Germany is the largest producer of biogas in Europe, with about 10,000 biogas operating plants [17]. The main feedstock for biogas production was initially energy crops. However, a more restricted policy framework has forced Germany to shift towards the use of alternatives such as crop residues, livestock waste, sequential crops and to capture methane from landfill sites [12]. The second country with the highest number of biogas plants in Europe is Italy, with around 1700 biogas plants, followed by France, Switzerland, the United Kingdom and the Czech Republic, with more than 500 plants each [18].

Biogas can be used directly to produce heat and power or converted into biomethane through a wide variety of upgrading technologies. Today, the main application of biogas is the production of heat or combined heat and power (CHP), especially in developing countries where biogas is mainly used for cooking and lighting [19]. Specifically, CHP and power generation are the main contributors to the total biogas consumption (over 95% are decentralized CHP plants), accounting together for nearly two-thirds of the consumption, followed by heating in buildings with approximately 30% [14].

Although the amount of biogas converted into biomethane is still relatively small, this process has a significant growth potential, achieving a biomethane production of approximately 3.5 Mtoe worldwide (around 10% of the total amount of biogas generated in that year) in 2018 [20]. In fact, in recent years there has been a growing interest in biomethane production in several countries due to its potential to deliver clean energy to a wide range of end users using the existing conventional natural gas infrastructure [14].

According to the IEA [14], the number of biomethane plants worldwide was expected to exceed 1000 in the course of 2020. Particularly in Europe, there has been a continuous growth of biomethane plants, from 187 plants in 2011 up to a total of 729 plants in 2020. Germany presents the highest number of biomethane plants (ca. 232), followed by the UK (ca. 131) and Sweden (ca. 80) [21]. In addition, the EU had 11 power-to-methane plants with a total methane production capacity of 7 MW (1440 toe) in 2019. This number is expected to increase to 16 MW (3300 toe) in the coming years, when all planned and announced plants become operational [5,20].

Today, about 60% of the total biomethane produced globally is injected to the natural gas distribution network, 20% is used as transport fuel and 20% has a variety of local end uses [14,18]. However, it is important to highlight that the deployment of biogas and biomethane in the future market will very much depend on the implementation of policies aimed at decarbonizing the energy system to support the production and use of these energy carriers.

## 2.2. Current Policy Framework for Biogas Energy Vector: The Case of the European Union

The development and deployment of biogas and biomethane technologies have been greatly promoted thanks to effective government policies. Therefore, policy support is a key factor to promoting the production and use of biogas and biomethane. Since regulatory policies vary between countries and regions, the development and use of biogas and biomethane has been uneven in the world, with Europe being the largest producer of biogas, followed by China and the United States [14].

In China, the government has promoted the development of the biogas industry, especially in rural areas. In 2019, the Chinese National Development and Reform Commission defined the major actions to support the use of biomethane in the transport sector with a document on biogas industrialization and biogas upgrading [14]. In the United States, the government has also promoted the use of biogas, highlighting the support of the state and federal government for the use of biomethane in the transport sector, making the country a world leader in this sector. Although China and the United States have significant development and implementation of biogas technology, they are still quite far from that achieved in Europe, which is responsible for more than half of the biogas production in the world [14].

The EU has promoted the development and utilization of renewable energy through different policies. In 2016, the European Commission (EC) set the revised Renewable Energy Directive 2018/2001/EU (RED II) [22], which entered into force in 2018. This new directive sets a target of at least 32% for renewable energy by 2030, with 14% renewable energy in the transport sector. The latter incorporates a 3.5% sub-target for advanced biofuels and biogas. According to the European Biogas Association (EBA), the RED II can be seen as a step forward for the large-scale implementation of renewable gas in the next decade. It will facilitate access for biomethane to the natural gas network, extend guarantees of origin for renewable electricity to renewable gas and facilitate cross-border biomethane trade [15].

The European bioeconomy strategy was published in 2018. The document included a specific plan with 14 actions aiming at (1) scaling up and strengthening the bio-based sectors, (2) rapidly deploying bioeconomy across Europe and (3) protecting the ecosystem and understanding the ecological limitations of the bioeconomy [23]. In addition, the EC launched an Action Plan focusing on the design and production of a circular economy to ensure the use of resources within Europe in the long term [24]. Both strategies adopted by the EU promote the use of biological resources and the reuse of residues, creating a good perspective for the development and use of biogas and biomethane.

Although there is a growing interest in biomethane production, its production costs are still higher than those of conventional natural gas. Therefore, biomethane production needs to be supported by favorable government regulations, public funding and/or tax incentives [25]. In Europe, several countries have introduced different support mechanisms to promote the development of biomethane production and use. For example, Germany has achieved a great development of biomethane production and injection into the natural gas network through different support mechanisms such as a sharing of investment costs for grid connections, re-financing programs, tax reductions and feed-in tariffs, plus bonuses if biogas is upgraded [25,26]. The use of biomethane as transportation fuel has also increased in the EU. In 2019, the consumption of biomethane increased by 44.3%, which is attributed to legislation in Sweden and Italy that encouraged the use of this biofuel in transportation [27].


## 3. Biomass Feedstock: Characteristics, Potential, and Logistics

There is no doubt about the huge potential offered by using sustainable, non-food-related feedstocks for the production of biogas and biomethane, which could cover about 20% of today's worldwide gas demand [28,29]. Wastes from agriculture, livestock, urban areas and industry have adverse effects on health and the environment. These organic wastes become the main emitters of greenhouse gases other than CO<sub>2</sub> (methane and nitrous oxide) if they are not carefully disposed [28,29]. AD is one of the most favorable biomass conversion technologies to convert organic waste into renewable energy and effectively

mitigate GHG emissions. In addition, digestate is produced during AD of waste materials, which can be used as an organic fertilizer due to its high nutrient content [30]. This process gives a second life to materials that would otherwise be considered waste. The result of using these previously unwanted materials provides a renewable energy source in the form of biogas, various by-products and organic fertilizers made from a genuine non-fossil production method [31]. AD is an expanding technology that offers the ideal scenario, where a continuous circulation of resources can be successful as a long-term alternative to organic waste management.

Historically, AD has been associated primarily with the treatment of animal manure (swine, cattle and poultry) and sewage sludge (SS) from aerobic wastewater treatment plants. However, current increased environmental awareness has motivated new waste management strategies and supports the production of renewable energies. The application of AD in organic waste has increased in attractiveness from a policy-making point of view, as it is now considered a reliable technology [32].

The raw materials that can be used to produce biogas can come from three sources, agricultural, industrial and municipal, which generate a large number of raw materials that can be treated by AD for biogas production (Figure 2).

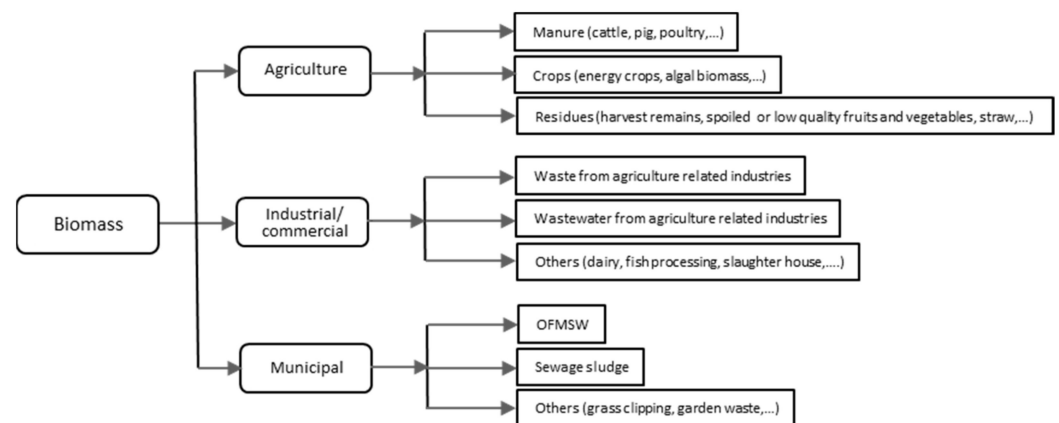

**Figure 2.** Classification of feedstocks potentially available for AD. Adapted from [33,34].

The most common organic raw materials used for biogas production are: organic (biodegradable) fraction of municipal solid waste (OFMSW), SS, organic industrial and commercial wastes, food wastes, manure from livestock and energy crops. All of them are characterized by their high content of biodegradable organic matter [33].

The main factors affecting the digestion efficiency are feedstock quality, pretreatment processes, design and process conditions such as temperature, C/N ratio, pH, hydraulic retention time and organic loading [33]. Theoretically, the AD process can decompose the organic fraction of any feedstock to produce biogas, which has a high percentage of methane (50–70%). However, the energy content of the different raw materials is a key factor in the productivity of biogas plants. Therefore, methane production varies greatly with the different types of substrates depending on their composition and characteristics. Sugar and starch crops can result in high methane yields of up to 450 Nm<sup>3</sup> of CH<sub>4</sub>/ton of volatile solids (VS) [35]. On the other hand, lignocellulosic biomass only produces up to 0.33 Nm<sup>3</sup> of CH<sub>4</sub>/g of VS [36–43].

On the other hand, both the application of previous feedstock pretreatments and anaerobic co-digestion (AcoD) of two or more substrates can favor the generation of biogas from certain wastes. Pretreatment is an important step in AD process as it removes inappropriate compounds and easy the accessibility of nutrients to microbes [44]. In recent years, many studies have investigated various pretreatments for biogas production enhancement, including physical (grinding/milling, irradiation), physico-chemical (steam explosion, liquid hot water), chemical (alkali, acid, oxidizing agents, organic solvent) or biological (ammonia fiber explosion, ionic liquids or fungal). Their effects are diverse, and

all are aimed at altering the structure to improve digestibility [43]. The use of thermal, chemical and mechanical pretreatment processes may improve the biogas production process by 24%, 21% and 33%, respectively [45].

Likewise, the co-digestion of two or more substrates that complement each other provides a better balance between macro and micronutrients and their availability, reduces the inhibitory potential of the mixture due to a dilution effect and improves the buffering capacity and moisture balance. AcoD allows improvement of the efficiency of the process by increasing the biodegradable component, broadening the number of microbial species participating in the digestion process and increasing the concentrations of active biomass. The selected co-substrate must favor these synergistic effects by balancing deficient components, overcoming inhibition and improving methane yield [46]. This leads to better process stability and higher biogas generation [47,48].

Sewage sludge is the most used co-substrates in AD (62%), followed by animal waste (e.g., animal manure and slaughterhouse waste) (16%), food and agro-industrial waste (15%) and other co-substrates such as yard waste, algae, sewage and agricultural waste [49]. Stimulating the degradation of organic matter and strengthening the microbial metabolism are key factors to be considered in further research [50]. Some characteristics of the main biomasses potentially available for the generation of biogas by DA are briefly discussed below.

### 3.1. Organic Fraction of Municipal Solid Waste

Domestic solid waste is generated as a consequence of human activities and it is rapidly increasing worldwide [51]. About 2 billion tons (0.11–4.54 kg/person every day) of municipal solid waste are produced annually and about one-third is not properly managed from the environmental point of view. High-income countries generate about 680 million tons per year (ca. 34% of the waste produced globally) with relatively less food and green waste content (32% of total waste), and a higher plastic, cardboard, paper, glass and metal content [52]. In contrast, the waste collected from middle- and low-income countries has a total content of 53–56% of food and green waste [52].

Due to its potential for reducing GHG emissions and its possibilities for increasing nutrient and energy recovery, conversion of OFMSW through AD has received increasing attention. There is a compilation of OFMSW characteristics in 43 cities belonging to 22 different countries and a report on the results of investigations related to biogas production [53]. The total solids (TS) and volatile solids (VS) from all these studies ranged between 20% and 40% (in wet weight basis), while the VS/TS was estimated to be 80–95%. For a 75–95% VS/TS ratio, a total biogas production of 300–600 Nm<sup>3</sup>/ton VS may be obtained. The main rate-limiting step during AD of OFMSW is the hydrolysis phase. Therefore, it is important to explore different alternatives to speed up this step, such as subjecting biomass to different pretreatment processes, as discussed above [44,45]. However, although pretreatments may increase the biodegradability of the substrate and the conversion yields, these processes may increase overall costs and limits its economic feasibility.

### 3.2. Cattle Manure

Animal wastes can be used as sources of biomass-based conversion processes, especially in bio-energy and bio-fertilizer production. Today, developed countries tend to decrease the number of farmers but increase the number of animals. This trend is also transforming livestock production in developing countries. Livestock contributes to nearly 40% of the total agricultural production in developed countries and 20% in developing countries, supporting the livelihoods of at least 1.3 billion people worldwide, since 34% of the dietary protein supply comes from livestock [54,55].

Today, in most countries, intensive livestock farming is being continuously developed [50]. The most frequent sources of meat supply in the world are domestic animal species such as cattle, pigs and poultry and, to a lesser extent, buffalo, sheep and goats. In Europe, livestock population in 2019 amounted to 143 million heads of pigs, 77 million heads of bovine animals and 74 million heads of sheep and goats, according to FAO [56].

The specific amount of livestock manure per animal relies on many aspects such as feeding regime, stage of the process, type of production system, etc., and the method of housing used [57]. Livestock activities have an environmental impact when manure is not effectively managed [58–61]. On the other hand, animal manure is considered an attractive natural resource for renewable energy production, and can also replace industrial fertilizers and improve soil fertility [62,63]. However, the low C/N ratio, high nitrogen content, the small amount of VS and, in some cases, its high proportion of components with low degradability potential such as lignocellulosic biomass are important limitations for the use of manure in AD [64–66].

By subjecting livestock waste (pig, cow, and poultry manure) to biological, chemical, thermal and physical pretreatments, methane production can be improved by 74%, 45%, 41% and 30%, respectively. The production of methane was 238 Nm<sup>3</sup>/ton VS, 271 Nm<sup>3</sup>/ton and 328 Nm<sup>3</sup>/ton VS for cow manure, pig manure and poultry manure, respectively, showing improvements of 32%, 45% and 46% [67].

### 3.3. Sewage Sludge

Wastewater treatment plants (WWTPs) generate SS as the main by-product, which represent a major problem in WWTPs since its final disposal may represent up to 50% of the operating cost [68]. One of the processes commonly used for the stabilization of SS in WWTPs is AD. The AD of SS is an established technology in developed countries with widely recognized benefits [69]. Currently, municipal wastewater treatment sites provide a high proportion of the biogas produced in AD plants and there is still enormous potential to be exploited around the world [70]. In general, this process is integrated by the so-called primary and secondary sludge, also known as mixed sludge, and about one-third of the solid matter in the sludge is converted into biogas (equivalent to approximately 50% of the organic matter). Primary sludge or raw sludge is obtained by gravitational sedimentation in the primary settler. It has a high content of organic matter and is easily degradable. Under optimal digestion conditions, a methane yield of 315–400 Nm<sup>3</sup>/ton organic dry matter (ODM) can be expected [71,72]. Secondary sludge, also called activated sludge, is the result of biological treatment of wastewater. It has a smaller degradable fraction than primary sludge and therefore a lower biogas yield. Under optimal digestion conditions, a methane yield of 190–240 Nm<sup>3</sup>/ton ODM can be achieved. In the case of using the digestate for agricultural use, the quality management standards must be respected [73]. It is estimated that WWTP treating over 100,000 population equivalents (PE) can generate 876,000 Nm<sup>3</sup> of biogas annually (at 6.5 kWh/Nm<sup>3</sup>) and 5694 MWh of electricity and thermal energy [70].

### 3.4. Lignocellulosic Biomass

The abundance and low costs of lignocellulose make this biomass source an attractive substrate for the production of second-generation biofuel, including bioethanol and biomethane [43]. In addition, the use of lignocellulose is considered crucial for the reduction of atmospheric CO<sub>2</sub> since it is a reservoir of this compound [74]. In contrast, the complex structure of lignocellulosic biomass represents a major bottleneck for bio-based processes, as it is highly recalcitrant to biological degradation and thus results in low biomethane yield [75]. With the aim of altering its structure and increasing its digestibility, lignocellulose can be subjected to different pretreatment processes (physical, physical-chemical, chemical and biological), as discussed previously.

On the other hand, lignocellulosic residues have a high C/N ratio. Therefore, co-digestion of lignocellulosic residues and other organic wastes is often reported. Methane productions of 290 and 178 Nm<sup>3</sup>/ton VS were achieved for rice straw: 217 and 223 Nm<sup>3</sup>/ton VS and 372 Nm<sup>3</sup> biogas/ton VS with corn straw and 269 Nm<sup>3</sup>/ton VS with wheat straw. In the case of fallen leaves, asparagus stem and garden ornaments, the methane production results were 82, 242 and 45 Nm<sup>3</sup>/ton VS, respectively [50].

The timber industry also produces large amounts of residual wood biomass annually [76], which could serve as raw material for AD plants. Investigations with fir and pine, major

representatives of softwoods, show low yields in fir and untreated pine, with 30–85 Nm<sup>3</sup> of CH<sub>4</sub>/g VS and 54 Nm<sup>3</sup> CH<sub>4</sub>/ton VS, respectively [74]. These yields increased to 141–276 Nm<sup>3</sup> CH<sub>4</sub>/ton VS using FIR [77] and to 178–224/CH<sub>4</sub>/ton VS when using pine [77,78] after subjecting these biomass feedstocks to physical and physico-chemical pretreatments.

### 3.5. Waste and Sewage from Agriculture-Related Industries

About 33% of the total food produced globally for human consumption is lost through the supply chain (production, distribution, consumption and post-harvest handling stages) [79,80]. This represents around 1.6 Gtons of food per year and a production value of EUR 625 billion [81]. The properties of such wastes include 73–100 g/kg TS; pH 4; 6–18% VS; 20 C/N; and >80% moisture content [82].

The use of AD to generate methane is a favorable technique for processing fruit and vegetable waste since it has high moisture content and is easily biodegradable. Due to the low TS content and high VS content of fruit and vegetable waste, they are rapidly hydrolyzed in the AD process, leading to acidification. As a result, methane production is inhibited and the final efficiency of AD is affected [83]. To address the acidification problem, several solutions have been proposed, including co-digestion with other materials, adjustment of the inoculum concentration, pretreatment of raw materials prior to AD and monitoring of the reactor conditions [84]. Gunaseelan [85] compared the extent and rates of the potential methane conversion of 54 fruit and vegetable waste samples and eight standard biomass samples. The ultimate methane yields (B<sub>0</sub>) and kinetics of fruit wastes ranged from 180 to 732 Nm<sup>3</sup>/ton VS and 0.016 to 0.122 d<sup>-1</sup>, respectively, while vegetable wastes ranged from 0.190 to 0.400 Nm<sup>3</sup>/g VS and 0.053 to 0.125 d<sup>-1</sup>, respectively.

Many types of industrial wastewater that are considered unsuitable for AD are currently treated with advanced anaerobic reactor systems. There are three main types of wastewater: processing, sanitary and cleaning. The compositions and quantities of these wastewater depend on the industrial sectors they are coming from. The application of anaerobic wastewater treatment is largely limited to wastewater with a COD of 3000–40,000 mg/L, for example, in the vegetable and fruit, starch, sugar and alcoholic beverages sectors. Recently, fewer contaminated wastewater effluents (COD of about 1500–3000 mg/L, and even below 1500 mg/L) have been successfully treated by certain AD systems, for example, in dairies, breweries and the fruit juice, soft drink and mineral water sectors [86–88].

### 3.6. Algae

Microalgae is a diverse microbial group with more than 20,000 species recognized to date, comprising a heterogeneous mixture of photosynthetic eukaryotic and prokaryotes [89]. The macromolecular composition of microalgae mainly contains carbohydrates (7–69% of VS), proteins (15–84% of VS) and lipids (1–63% of VS) [90]. Usually, their dry matter content is about 20% and the ash content represents about 10% of the total dry weight.

Recently, several photobioreactors prototypes (e.g., tanks, tubes, and closed systems) have been developed for growing microalgae biomass on a commercial scale. Some examples of microalgae biomass used for AD are: *Chlorella sorokiniana*, *Spirulina dunaliella*, *Spirulina maxima*, *Chlorella vulgaris*, *Scenedesmus obliquus*, *Euglena gracilis*, *Spirulina maxima*, *Durvillea Antarctica* and *Nannochloropsis oculata* [89]. In general, the specific methane yield using whole algae biomass ranges between 90 and 440 mL methane/g VS [91,92]. In AD with *C. sorokiniana* and *C. vulgaris*, the conversion of algae-COD into biogas reached up to 40–73% and the highest methane yield was obtained using dried and ground algae [93].

Some drawbacks of AD treatment of microalgae have been described. For instance, unprocessed microalgae were not considered as the best substrate for biogas production due to their low biodegradability and low biogas performance. Some pretreatments can break down the cell walls of the microalgae, thus increasing biomass biodegradability and methane yields [94–96]. Therefore, the biomass residues of microalgae after extraction of lipids and amino acids serves as a good candidate for its methanogenic conversion through



AD [97]. Another drawback is the low C/N ratio of the microalgae biomass and/or ammonia inhibition, which can be balanced by adding substrates with high carbon content [98,99].

#### 4. Biogas Upgrading Technologies

Since 2016, the research interest on biogas upgrading technologies has increased significantly in terms of scientific publications (Figure 3), with special attention in using SS from WWTPs. A total of 602 scientific publications related to biogas upgrading were identified. The scientific publications were searched on Web of Science (WoS) using the search equation TS = (“biogas upgrad\*” OR “upgrad\* biogas” OR “biogas up grad\*” OR “up grad\* biogas” OR “upgrad\* of biogas” OR “up grad\* of biogas” OR “biogas purifi\*” OR “purifi\* biogas” OR “purification of biogas”) AND PY = (2017 OR 2018 OR 2019 OR 2020). From this total publication, China accounts for 19.9% of the articles, followed by Spain, Italy and the United States, with 13.0%, 12.3% and 7.3%, respectively.

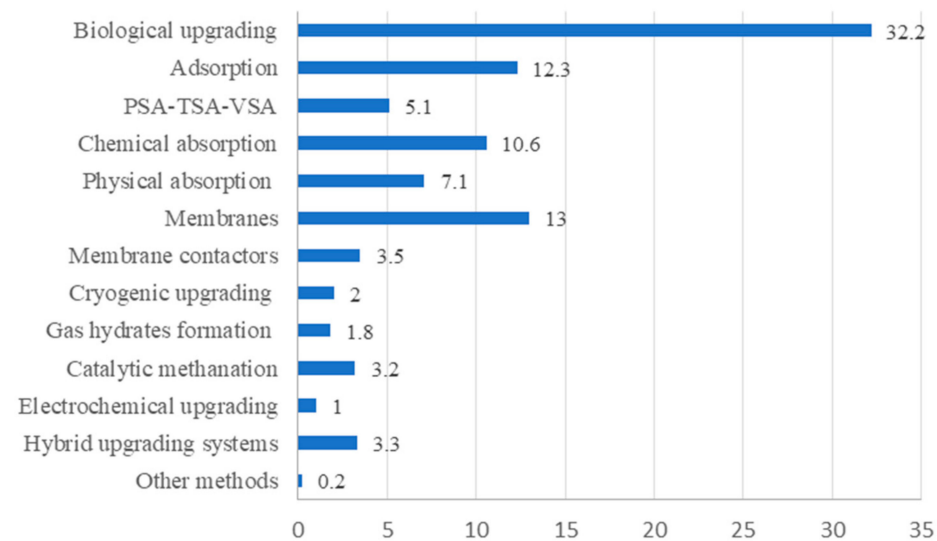


Figure 3. Distribution of publications by technology (number of articles, %).

Figure 4 shows the specific technological distribution of the articles aimed at biological upgrading. Among them, biomethanation is the most studied process, corresponding to 41% of the articles standing out the in situ and ex situ addition of hydrogen. Photosynthetic upgrading using microalgae is in the second place, with 33% of publications. These biogas upgrading technologies are mainly located in small and medium WWTP.

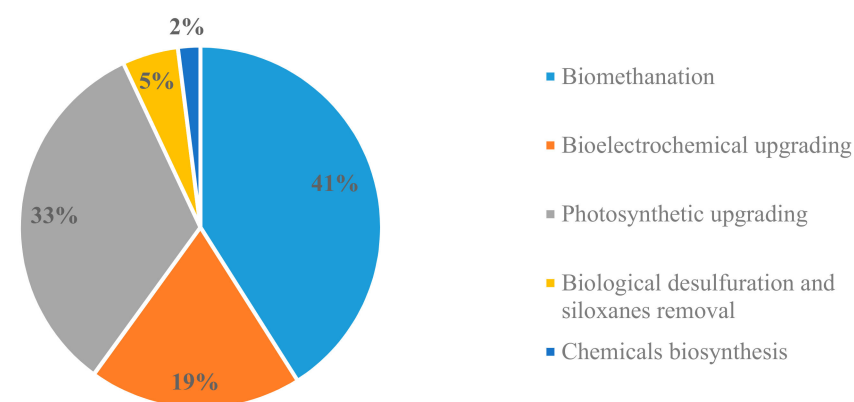


Figure 4. Biological upgrading by technology (number of articles, %).

Currently, upgrading biogas from DA is the most common biomethane production route, with biomass gasification remaining far away in the global market [100]. The biogas upgrading methods can be divided into two different categories: sorption and separation

technologies [10]. Among different upgrading methods, water scrubber and membranes are the most used technologies in the UE, followed by PSA and chemical scrubber [15]. The technologies implemented at the industrial scale for the upgrading of biogas are described in the following sections.

#### 4.1. Water and Organic Scrubber

This upgrading technology is the most common upgrading technique and there are several commercial suppliers in a wide range of capacities. It uses water as selective absorbent that is often implemented at industrial scale due to better impurities tolerance and fewer costs than other absorbents. The solubility of all components increases when pressure is higher, and  $\text{CO}_2$  is more soluble than  $\text{CH}_4$  according to Henry's Law. Therefore, the process is based on the higher aqueous solubility of  $\text{CO}_2$  compared to  $\text{CH}_4$  that is 26 times lower at  $25\text{ }^\circ\text{C}$  [11].

The biogas to be upgraded is injected into an absorption column with pressure and temperature, 4–10 bar and  $40\text{ }^\circ\text{C}$ , accordingly [10]. The water leaves the absorption column filled with plastic packing to increase mass transfer between water and biogas. Figure 5 shows how water is led to a flash tank to recover traces of  $\text{CH}_4$  and transferred back to the biogas inlet [101]. For water recycling, a desorption column filled with a plastic packing is used together with a counter flow of air to release  $\text{CO}_2$ . Before sending the water back to the absorption column, it is cooled down in order to increase the differences in solubility between methane and  $\text{CO}_2$  and improve their separation [10,102–104].

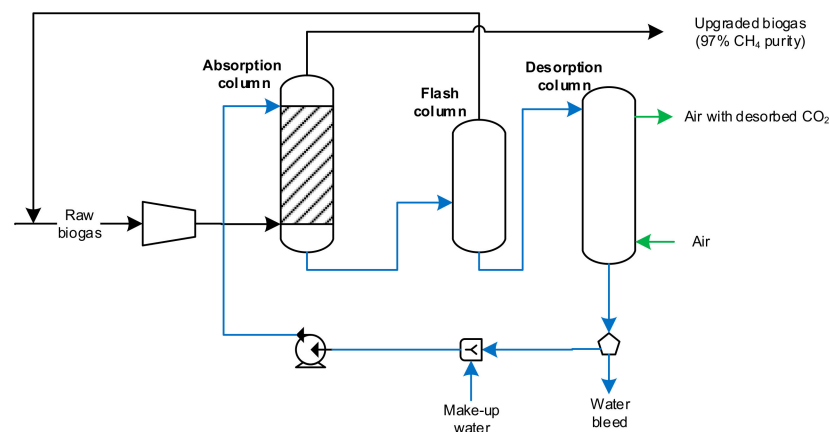


Figure 5. Biogas upgrading with water scrubbing. Adapted from Muñoz et al. [103].

Water scrubbing can be performed with low-quality water using a single-pass scrubber, or with high-quality water using sequential units and a two-stage stripping process for water regeneration. Depending on the operating pressure and temperature, about  $0.1\text{--}0.2\text{ m}^3$  of water/ $\text{Nm}^3$  of biogas are required [105]. Energy consumption for raw biogas is between  $0.25$  and  $0.3\text{ kWh/Nm}^3$ , rely upon the capacity of the facility [102]. It should be emphasized that energy consumption for clean biogas can be three times the cost for raw biogas due to the water regeneration step due to the large amounts of required water. Finally, the collected methane is subjected to a drying step, reaching up to 97% purity.

This process is also useful for the removal of  $\text{H}_2\text{S}$  because it is more soluble than  $\text{CO}_2$  in water. High pressure water scrubbing, with operating pressure around 10 bar, is the most used to remove  $\text{CO}_2$  and  $\text{H}_2\text{S}$  [106]. Stripping with air is not favorable when  $\text{H}_2\text{S}$  concentration level is high because the water quickly becomes polluted with elementary sulfur, which causes corrosion and operational problems. Biogas upgrading with water scrubbing is an efficient technology with low chemical requirement and high methane recovery (up to 98%). The investment cost is around EUR 2500 per  $\text{Nm}^3/\text{h}$  at design flow rates in plants with capacities of  $500\text{--}1000\text{ Nm}^3/\text{h}$  [11]. In addition, high amounts of water and energy consumption are needed [101].

Organic solvents such as methanol ( $\text{CH}_3\text{OH}$ ), N-methyl pyrrolidone (NMP) and polyethylene glycol ethers (PEG) can be used instead of water to absorb  $\text{CO}_2$ . A pre-removal of  $\text{H}_2\text{S}$  is recommended in this process to maintain solvent absorption conditions. The biogas is compressed to 6–8 bar and cooled before injected into the bottom of the absorption column. The organic solvent is cooled and provided in the top of the absorption column to maintain a temperature around  $20\text{ }^\circ\text{C}$  [10]. Although this process improves efficiency in terms of  $\text{CO}_2$  separation and anticorrosion properties compared to water scrubbing, energy requirements and the cost of the organic solvents are higher, which make the process more expensive in terms of operation. Organic solvent requires a biogas pre-conditioning step to remove water and heating steps to achieve the desorption of  $\text{CO}_2$  at  $40\text{ }^\circ\text{C}$  (Figure 6) [106]. In addition, a regeneration step of the organic solvent is required, which usually implies high temperatures. Similar to water scrubbing, the use of organic solvents also results in less than 2%  $\text{CH}_4$  losses [102].

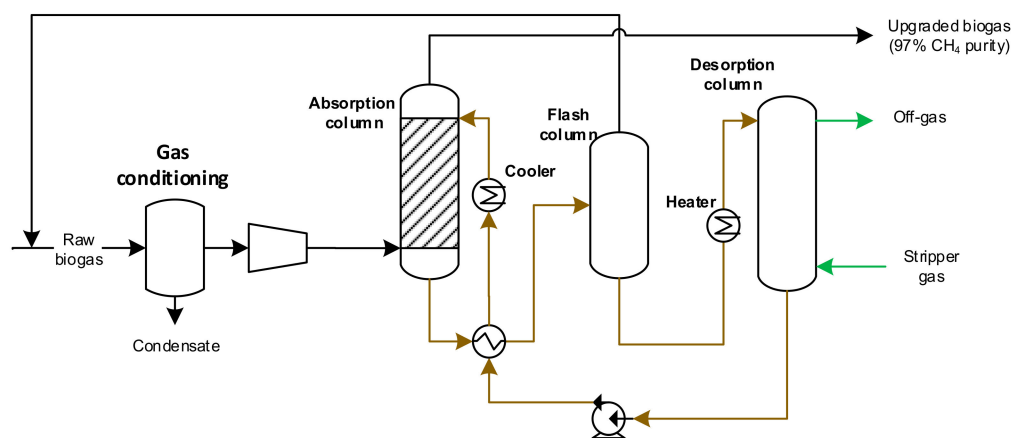



Figure 6. Biogas upgrading with organic solvents. Adapted from Muñoz et al. [103].

Organic solvent seems to be a better investment option in biogas upgrading plants under  $500\text{ Nm}^3/\text{h}$  than water scrubbing or membrane technology, for which investment costs are above EUR 5000 per  $\text{Nm}^3/\text{h}$  at design flow rates.

#### 4.2. Chemical Scrubber

Chemical absorption technologies mainly use amines as the solvent. Common amines for removing  $\text{CO}_2$  and  $\text{H}_2\text{S}$  are diethanolamine (DEA), monoethanolamine (MEA) and methyl diethanolamine (MDEA). Currently, a mixture of MDEA and piperazine (PZ) is mainly used as solvent since it presents higher  $\text{CO}_2$  absorption capacity when compared to MDEA alone.

Figure 7 shows a typical amine scrubber system. First, the amine solution is introduced to the top of the absorption column while biogas enters from the bottom. The  $\text{CO}_2$  then reacts with the amine solution by an exothermic reaction and is absorbed. This increases the temperature of the absorber and facilitates the absorption of  $\text{CO}_2$  by improving the solubility of  $\text{CO}_2$  in the amine solution. The absorption column often contains a random or packed bed operating at 1–2 bar. The liquid from the bottom of the absorption column is then pumped to the top of the stripper column through a heat exchanger for regeneration ( $\text{CO}_2$  is released and amines are recovered). The regeneration column is equipped with a reboiler at  $120\text{--}150\text{ }^\circ\text{C}$  that provides heat to boil the amines solution and to release  $\text{CO}_2$ . The  $\text{CH}_4$  concentration is up to 99% and  $\text{H}_2\text{S}$  can also be absorbed completely.

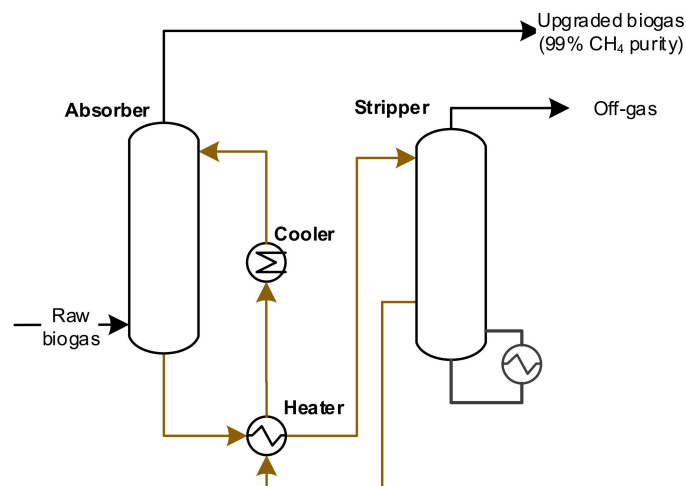

**Figure 7.** Process flow diagram for chemical scrubber using an amine-based compound as the solvent. Adapted from Muñoz et al. [103].

This process operates in atmospheric pressure, giving low operational costs. In contrast, this upgrading system involves high investment costs due to the heat requirements for the regeneration of the amine solution. Another drawback of this technology is the requirement to treat waste chemicals, corrosion and contaminants, which increases the complexity of the process [101]. Besides amines, other solutions such as aqueous alkaline salts have also been used for chemical scrubber [10].

Chemical scrubber is, together with membrane separation, the most common technology in biogas upgrading facilities, but it requires higher capital costs (around EUR 3200 per  $\text{Nm}^3/\text{h}$  at design flow rates in capacities under  $1000 \text{ Nm}^3/\text{h}$ ) [11]. The energy consumption for raw biogas is between  $0.05\text{--}0.15 \text{ kWh}/\text{Nm}^3$  and the  $\text{CH}_4$  losses are less than  $0.1\%$  [102]. It should be noted that  $\text{H}_2\text{S}$  can be adsorbed in the amine solution, resulting in an increase in heat consumption if it is not removed in the first step. Heat requirements are between  $0.50$  and  $0.75 \text{ kWh}$  per  $\text{Nm}^3$  of biogas treated, giving a total energy consumption close to  $1 \text{ kWh}$  per  $\text{Nm}^3$  of raw biogas.


#### 4.3. Pressure Swing Adsorption

During PSA,  $\text{CO}_2$  is separated from biogas under elevated pressure. Then, the pressure decreases, resulting in gas release. It is based on molecular characteristics and the affinity of the  $\text{CO}_2$  to an adsorbent material, such as silica-gel zeolites and activated carbon, typically.  $\text{CO}_2$  is adsorbed on the adsorbent surface by van der Waals forces. This adsorbent is often packed in vertical pressurized columns (Figure 8). The biogas is compressed to  $4\text{--}10 \text{ bar}$  and injected in a  $\text{H}_2\text{S}$  removal unit. Subsequently, there are four adsorption columns, which are fed in parallel with biogas to maintain a continuous operation [103]. Biomethane is collected from the top of the adsorption columns, decreasing their pressure. Depending on the adsorbent material it is possible to remove not only  $\text{CO}_2$  but also  $\text{N}_2$ ,  $\text{O}_2$  or water [10].

These adsorption columns alternate steps of pressurization and depressurization, followed by a step of regeneration where the saturated column is venting to ambient pressure and purging with upgraded biogas for desorption [103]. This cycle normally lasts about 10 min.

In 2018, PSA was the fourth-most operated biogas upgrading technology in the EU, close to amine scrubbing in number of facilities [100]. The power demand is less than  $0.3 \text{ kWh}$  per  $\text{Nm}^3$  for raw biogas [103] and  $\text{CH}_4$  recovery varies between  $96\%$  and  $98\%$  [102].


The investment costs decrease from EUR 2700 per  $\text{Nm}^3/\text{h}$  at design flow rates of  $600 \text{ Nm}^3/\text{h}$  to EUR 1500 per  $\text{Nm}^3/\text{h}$  for plants with a capacity over  $1500 \text{ Nm}^3/\text{h}$  [11]. Another advantage of PSA is that no chemicals are needed during the process, but the operation is complex.

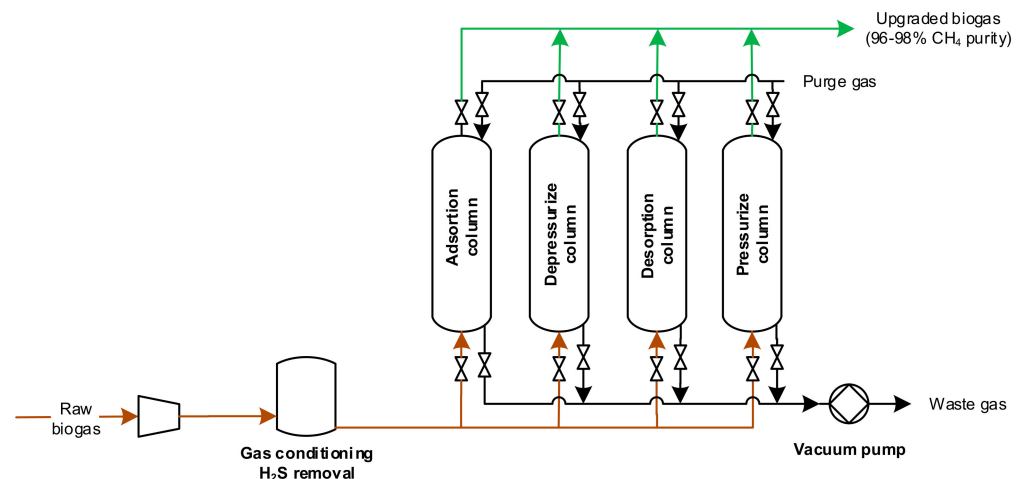

**Figure 8.** Biogas upgrading by pressure swing adsorption (PSA). Adapted from Muñoz et al. [103].

#### 4.4. Membrane Separation

Gas separation by membranes has been in the market for decades. Membranes are semi-permeable barriers that allow compounds to pass through depending on their permeability and difference in temperature, concentration or pressure. Pore-flow and solution-diffusion are the two process models used in membrane separation. Pore-flow separation with polymeric membranes is frequently used for gas [106]. Biogas upgrading membrane technology permeates  $\text{CO}_2$  through the membrane and retains methane in the inlet side (Figure 9). However, when using conventional membranes, the biogas upgrading process also retains  $\text{N}_2$  and permeates  $\text{H}_2\text{O}$ ,  $\text{O}_2$ ,  $\text{H}_2\text{S}$  and  $\text{CO}_2$  [103].

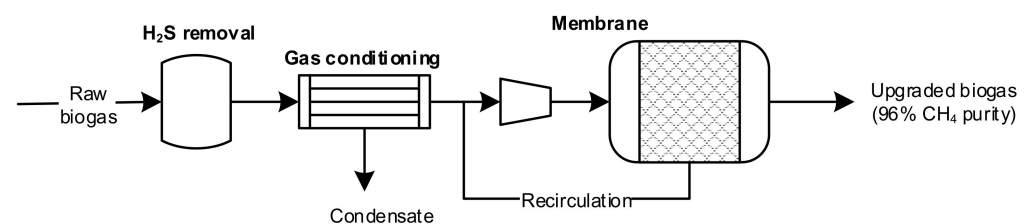

**Figure 9.** Scheme of membrane gas separation process. Adapted from Muñoz et al. [103].

Cellulose acetate and polyimide are the most used commercial membranes for biogas separation. Cellulose acetate reaches separation of  $\text{CH}_4$  close to 98%, is cheap and has an easy manufacture [101]. As an alternative, polyamide materials offer high mechanical and thermal stability and show high permeability and selectivity. These membranes are now economically competitive and allow the separation of  $\text{CO}_2$  and  $\text{H}_2\text{S}$  when compared to conventional technologies. Improvements in membrane material are being investigated, aimed at obtaining higher permeability without lowering gas selectivity. An increase in  $\text{CH}_4$  recovery from 80% to 99.5% can be achieved by using a multistage membrane process [107].

Inorganic membranes such as zeolite, activated carbon, silica, carbon nanotubes and metal-organic framework present more mechanical strength, thermal stability, and resistance against any chemicals than polymeric membrane. However, the manufacturing of inorganic membranes is complex and expensive. The main developments in membrane separation methods are focused on mixed matrix membranes, which integrate both polymeric membranes and inorganic membranes.

$\text{H}_2\text{S}$  and siloxanes affect membrane performance and must be removed from raw biogas. In addition, it is necessary to remove water, aerosols and oil droplets by filtration prior entering to the membrane unit. Furthermore, more effective separation methods are needed for mixtures such as  $\text{CO}_2/\text{CH}_4$ ,  $\text{H}_2\text{S}/\text{CH}_4$  and other mixtures with impurity traces. In this context, there is intensive research on developing new membrane materials for efficient biogas upgrading.

Membranes can be classified based on the operating pressure. High-pressure membranes operate at 8–20 bar, while low-pressure membranes operate at atmospheric pressure. The process can be gas/gas separation or gas/liquid separation because of the separation media. There are four commercial configurations for gas/gas membrane: the single stage, the two-stage with sweep biogas stream, the two-stage with a recirculation loop and the three-stage with sweep biogas stream [108]. Configuration without recirculation shows fewer operational costs but less performance in CH<sub>4</sub> separation.

Cellulose acetate and polyimide in dry process is the most extended technology for biogas upgrading. Biogas is pressurized between 5 and 10 bar after the gas conditioning step [10,102]. The biogas with a significant amount of methane of 10–15% (v/v) is recirculated to the compressor step and led to the membrane again to improve the CH<sub>4</sub> purity in the outlet gas. Under these conditions, CO<sub>2</sub> solubility and diffusion coefficient are higher than CH<sub>4</sub>, therefore increasing the permeability of this compound. The CO<sub>2</sub> and other impurities diffuse to the side of the membrane with lower pressure while CH<sub>4</sub> remains to the side of the membrane with higher pressure.

Membranes show disadvantages such as extensive pretreatment and low CH<sub>4</sub> purity when biogas passes through the membrane only one time. Biogas pretreatment integrates particles removal, H<sub>2</sub>O, H<sub>2</sub>S, NH<sub>3</sub>, VOCs and siloxanes by condensation and activated carbon filtration. This pretreatment is crucial to avoid a rapid deterioration and clogging of the membrane. On the other hand, CH<sub>4</sub> recoveries of 98–99% are getting in gas–liquid units or two-stage gas–gas units with recirculation of the permeate from the second membrane module [103]. The lifetime of the membrane is guaranteed by manufacturers for 5 to 10 years [106]. Membrane technology is a cost-effective alternative to the absorption biogas upgrading systems due to a reduction in the cost of the polymeric membranes over time and fewer energy requirements.

The capital cost of gas–gas membrane units is under EUR 2500 per Nm<sup>3</sup>/h for design flow in capacities above 500 Nm<sup>3</sup>/h and it can reach an investment cost of EUR 6000/Nm<sup>3</sup> h in small plants [11]. Operating costs are in the range of EUR 0.13–0.22/Nm<sup>3</sup> of biogas treated [103]. Energy consumption for raw biogas is 0.18–0.20 kWh/Nm<sup>3</sup>, which is lower than that of PSA or water scrubber technologies [102].

#### 4.5. Cryogenic Separation

Cryogenic separation operates at low temperatures (−170 °C) and high pressures (about 80 bar), allowing the liquefaction of certain gases such as CO<sub>2</sub> and H<sub>2</sub>S. During this process, biogas temperature is decreased gradually and liquefied CH<sub>4</sub> is separated from both CO<sub>2</sub> and the other components to meet quality standards for Liquefied Natural Gas (LNG) [103]. With the aim of reaching the quality of natural gas, this process must be repeated up to four times.

Figure 10 shows a simplified diagram of a cryogenic separation process. It can be noted that the system uses a high number of equipment: compressors, turbines, heat exchangers and distillation columns, which have high capital and operational costs. In addition, a pretreatment that involves the removal of water, H<sub>2</sub>S, dust particles, halogens, siloxanes and other unwanted components is necessary.

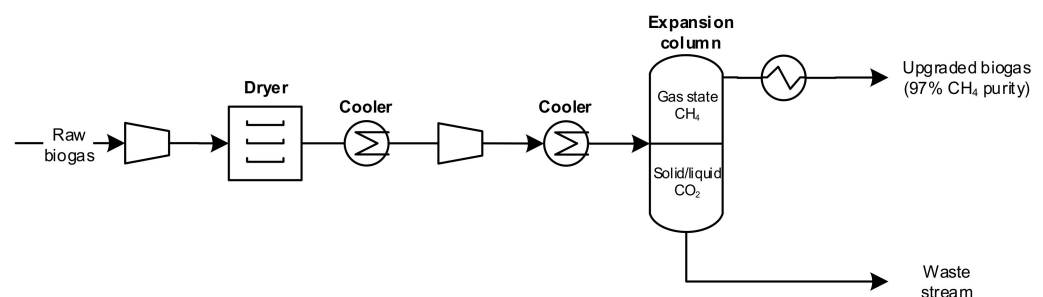


Figure 10. Simplified diagram of cryogenic separation. Adapted from Muñoz et al. [103].


The biogas is compressed from 80 bar to 100 bar and cooled until  $-55\text{ }^{\circ}\text{C}$  to liquefy the  $\text{CO}_2$ . The remaining gas stream is then cooled to  $-85\text{ }^{\circ}\text{C}$  to remove  $\text{CO}_2$  in the solid phase [101]. There are a few commercial plants already in operation using this upgrading technology [102]. However, it still requires further development. This system can reach a  $\text{CH}_4$  recovery of up to 97% and produce LBM with low extra energy. The energy use is over  $0.76\text{ kWh per Nm}^3$  for raw biogas.

#### 4.6. Cost Associated to Biogas Production and Conventional Upgrading Technologies

Feedstock costs and availability determine the economic viability of the biomethane facility. The average cost of biomethane production through biogas upgrading is around EUR 15.7 per million British thermal units (MBtu). Most of this cost is attributed to the production of biogas, while the upgrading processes represent 10–20% of the overall production costs, considering an upgrading facility with the capacity of treating  $3.5\text{ million m}^3$  of biogas per year. Investment and operating costs along with methane recovery and removal efficiency of the minor components are the main factors to consider during the selection of the upgrading technology [11]. The cost of the upgrading process can vary significantly for different plant sizes and regions. Compared to Europe, North America shows lower upgrading costs due to larger plant sizes [14]. Biomethane grid connection renders a potential additional cost. To reach cost-effective plants, they must be located near to gas distribution systems, with typical network connection costs being around EUR 2.49/MBtu, split almost equally between pipeline infrastructure and grid injection and connection costs [109].

The biomethane production costs can be reduced over time as the upgrading technologies improve and natural gas gets more expensive. The use of  $\text{CO}_2$  and methane avoiding their emissions also improves the cost competitiveness of biomethane.

Figure 11 shows the investment and maintenance costs for different biogas production technologies excluding feedstock. Livestock manure has a significantly lower biogas production yield than crop residues, as mentioned in Section 2. Today, biogas from large biodigesters, flow rates above  $750\text{ m}^3/\text{h}$  and the use of crop residues as feedstock seem to be the best option to produce biogas at competitive costs [110].

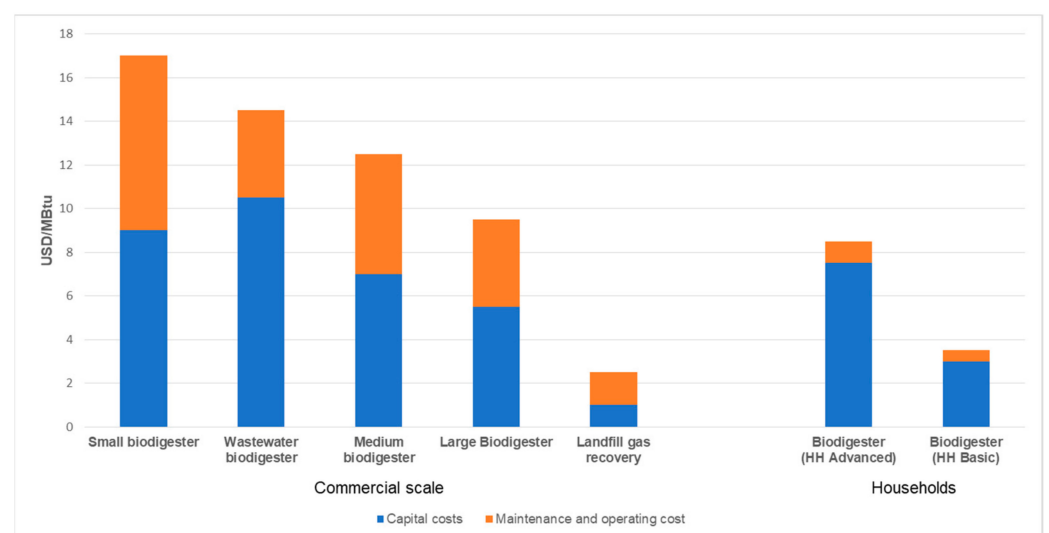


**Figure 11.** Investment and maintenance costs for biogas production technology per unit of energy produced in 2018. HH = household; “HH Advanced” includes pre-manufactured biodigesters made of more expensive composite material; “HH Basic” includes biodigesters constructed in place using traditional construction materials such as sand, gravel and cement. Adapted from [14].

Water and organic scrubber, amine chemical scrubber, membranes (gas permeation) and PSA are the most widely applied technologies to upgrade biogas from anaerobic

digestion to methane [111]. Cryogenic upgrading is still in development in terms of separation of key compounds such as oxygen, nitrogen and hydrogen. The systems of membranes and chemical scrubber with amines have taken a big step forward in the past 5 years. Membrane technology has demonstrated achievements in the treatment of biogas streams with different origins (e.g., WWTP organic, WWTP and by-product treatment plant biogas production plants from energy crops), different specifications and end uses of biomethane. Applications such as network injection at different pressures and flows, fuel, vehicle Bio-CNG (compressed natural gas) or Bio-LNG have been implemented. Biogas upgrading by membranes is the main technology chosen in the case of WWTP. In addition, the membrane technology has undergone significant improvements compared to other commercial separation technologies, being fast and cheaper due to the lowering of the membrane production costs. PSA systems using zeolite also result in low production and investment costs [112].


Investment costs and operating costs of the biogas upgrading technologies depend mainly on the capacity of the facilities. Figure 12 shows biomethane capital costs for each upgrading technology for plants with similar investment costs in capacity, ranging from EUR 200 to 2000 per  $\text{Nm}^3/\text{h}$ .

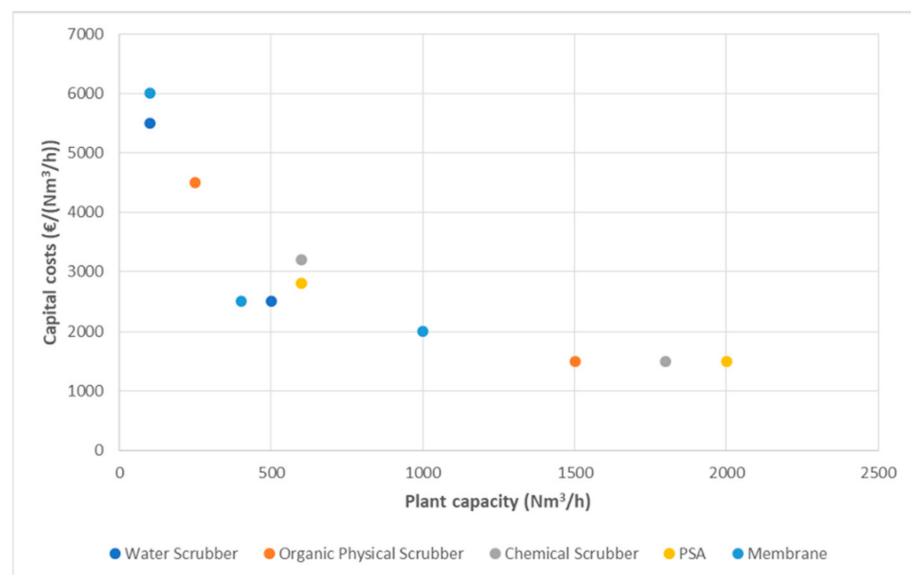

**Figure 12.** Capital costs by upgrading technology and capacity of the plant, 2018. Data from Rodero et al. [11].

On the other hand, Figure 13 indicates that the energy consumption estimated to upgrade  $250 \text{ Nm}^3/\text{h}$  is between  $0.15$  and  $0.35 \text{ kWh}/\text{Nm}^3$ , with water scrubber the technology having the highest consumption and amine scrubber the lowest consumption. In addition, amine scrubber has a heat consumption of  $0.45 \text{ kWh}/\text{Nm}^3$  of clean biogas, resulting in an overall energy consumption of  $0.60 \text{ kWh}/\text{Nm}^3$  of biogas inlet.



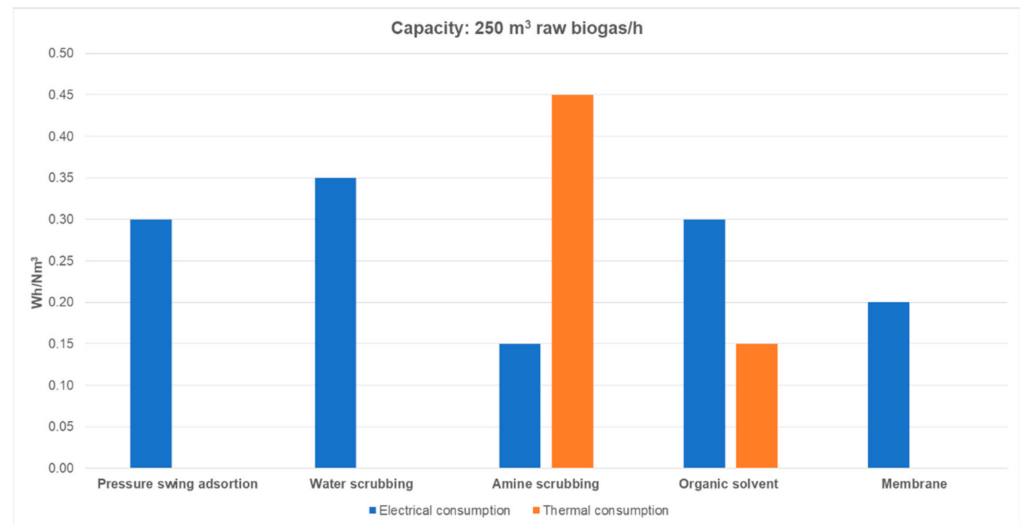

**Figure 13.** Energy and heat consumption by upgrading technology at 250 Nm<sup>3</sup>/h capacity plant. Adapted from Niederbacher [113].


## 5. Biological Upgrading Development

Biological upgrading technology is a real opportunity versus catalytic methanation. The latter requires much higher temperatures, is less tolerant to biogas impurities and it is convenient to larger scale projects (above 5 MW) [4]. The biological methanation suits small gas facilities and it is flexible in connecting to intermittent supplies of hydrogen.

There are different layouts to implement a biological methanation facility. One of them is separating the CO<sub>2</sub> contained in biogas via a conventional physico-chemical process and then only purified streams of CO<sub>2</sub> and hydrogen in ex situ reactor that improves the process efficiency. Gas storage is also an important factor to be considered in the implementation of these facilities; different settings are possible depending on whether it is for storage of hydrogen, biogas or CO<sub>2</sub> before biomethanation process.

The biological upgrading of biogas is based on the use of bioreactors with autotrophic microorganisms capable of using the CO<sub>2</sub> fraction of the biogas as a carbon source, so that the biogas is enriched in methane. In general lines, two autotrophic metabolism pathways are distinguished from an industrial point of view: (i) the photoautotrophic pathway, mediated by microalgae that use solar radiation to fix CO<sub>2</sub> and (ii) the chemoautotrophic pathway, in which CO<sub>2</sub> is reduced to carbon monoxide, methane or other organic compounds by bacteria.

This last route is known commercially as Power-to-Gas, or more specifically Power-to-Methane, because the process uses the electrolysis of water to generate hydrogen gas and its subsequent biological conversion together with CO<sub>2</sub> into methane (Equation (1)). However, the use of power in the microbial electrolysis of organic compounds to produce hydrogen is of great interest since it allows the use of organic waste to produce hydrogen [114]. On the other hand, electric currents can be used to generate protons (H<sup>+</sup>) and electrons (e<sup>-</sup>) that are directly used by archaea together with CO<sub>2</sub> (Equation (2)) in what is known as electro-methanogenesis [115]. This review is focused on the photosynthetic and the methanation of hydrogen and CO<sub>2</sub> technologies, because of the higher technological readiness level (TRL) reported.



There are some references at the industrial level of biological methanation driven by Viessmann and Electrochaea [116,117]. Both use a stirred tank reactor configuration where archaea microorganisms consume hydrogen and CO<sub>2</sub> in a biological Sabatier reaction ( $4 \text{H}_2 + \text{CO}_2 = \text{CH}_4 + 2 \text{H}_2\text{O}$ ). The reaction takes place at 35–70 °C and 1–10 bar, in contrast

to the catalytic methanation that works at temperatures and pressures of  $>250$  °C and 20–40 bar, respectively. The facilities get the  $H_2$  via water electrolysis with energy demand around  $5 \text{ kWh/m}^3 H_2$ . The Viessmann facility (MicroEnergy demonstration plant, operated at the Schwandorf sewage) worked until the end of December 2014. It reached a stable production volume with a biogas quality of more than 98% methane and a hydrogen content as low as 2%. In March 2015, the facility was relocated to Allendorf, producing methane from hydrogen using the tested biological process. Then, the resulting methane was fed via the existing feed-in systems into the natural gas grid. The  $CO_2$  required for this process could be obtained from raw biogas or be supplied from the gas processing plant. In this context, the power-to-gas process using the resulting raw biogas from AD plants can be considered as upgrading [116].

A biological alternative to reduce energy consumption and water footprint of  $H_2$  production is the bio-electrochemical pathway. This alternative consists of the use of a bio-anode where microorganisms consume COD generating electrons, which are subsequently used in the cathode to produce  $H_2$ .

### 5.1. Hydrogenotrophic Biogas Upgrading

Storing surplus renewable energy in the form of renewable gases by means of converting hydrogen, produced from electrolysis of water, and a stream of  $CO_2$  from biogas into methane finds in biogas an indispensable ally to incorporate the energy potential generated in the digestion to the circular economy. The hydrogenotrophic methanogenic upgrading has a high tolerance to impurities and moderate operating conditions compared to catalysts upgrading, and both are currently the subject of numerous studies, planned and under development, at a demonstration scale [118].

The main bottleneck in the development of the technology is the low solubility of hydrogen in water, limiting its transfer rate and, therefore, its conversion to biomethane. To face this challenge, different configurations of bioreactors (fed with biogas or with  $CO_2$  separated from the biogas stream through different technologies) have been developed. During ex situ biomethanation, biogas (or  $CO_2$  separated from the biogas stream through different technologies) is sent to an external reactor where  $CO_2$  reacts with the  $H_2$  generated from renewable electricity. A different approach consists of supplying hydrogen directly into the anaerobic digester, known as in situ biomethanation. In situ biomethanation upgrading seems to show greater economic attractiveness [119] than the ex situ alternative.

Among the ex situ technologies reported, plug flow bioreactors [120] and biotrickling filters [121] are capable of reaching conversion efficiencies greater than 99% and biomethane productivities of up to  $38\text{--}40 \text{ m}^3$  per  $\text{m}^3$  of reactor and day ( $\text{m}^3/\text{mR}^3 \text{ d}$ ). This configuration allows the effective adaptation of non-specific anaerobic cultures to the operating conditions of the upgrading [122] in which both hydrogenotrophic and acetotrophic archaea predominate as a consequence of the relevant role of homoacetogens in the formation of acetate as intermediate [123].

The acetoclastic methanogens (*Methanosarcinals*) in collaboration with the acetate oxidizing syntrophic bacteria (*Firmicutes*) are responsible for 70% of the methane production in hydrogenotrophic biogas upgrading and 30% is due to the reduction of  $CO_2$  by hydrogenic methanogens [124]. The addition of  $H_2$  also means an alteration in bacterial community and in the balance of endogenous  $H_2$ . Methanogenic hydrogenotrophic bacteria increase, producing methane from  $CO_2$  in biogas. On the contrary, oxidative syntrophic bacteria decrease because of the pressure exerted [125,126].

On a pilot scale, TLRs of 3 to 5, the rates achieved are more modest in biotrickling filters, from  $3 \text{ m}^3/\text{mR}^3 \text{ d}$  up to  $6 \text{ m}^3/\text{mR}^3 \text{ d}$  at increasing the operating pressure [127,128] to facilitate the transfer of hydrogen to the liquid phase. In addition, it has been observed a great capacity to adapt to fluctuations and intermittency in the supply of hydrogen, relevant in the context of power-to-methane, and the stability of the operation in the long term [127].

From a different point of view, hydrogen is a metabolite present, to a greater or lesser extent, during the anaerobic fermentation of organic compounds in all industrial digestion

processes. This raises the interest of its use as a co-substrate of anaerobic digestion to increase the methane content in the biogas or even the direct production of biomethane during digestion in situ upgrading. The in-situ process adds to the limitation to the transfer of hydrogen, the challenge of maintaining the efficiency of the removal of organic matter under conditions that are thermodynamically unfavorable for acetogenesis due to the high partial pressure of hydrogen and under conditions of agitation that are far from favoring the transfer of poorly soluble gases.

On a commercial scale, the feasibility of integrating an intermittent stream of hydrogen into sludge digesters using Venturi-type ejectors has been tested [129], but the bulk of recent research is still on a laboratory scale. At this scale, novel configurations such as membrane bioreactors treating complex wastes [130] or UASB for the treatment of different wastewater have been studied [131], reaching methane concentrations above 90%. The process is unstable under certain operating conditions, with the accumulation of volatile fatty acids [132] and increase in pH (>8) [133] associated with the displacement of the CO<sub>2</sub>/bicarbonate equilibrium. In this sense, the increase in operating pressure (up to 2–7 bar) of sludge digestion [134] and food waste digestion [135] has succeeded in improving the quality of biomethane (up to 92–94%), as in the ex-situ process, and in controlling the pH in a neutral range for the digestion process.

### 5.2. Photosynthetic Biogas Upgrading

Microalgae-based biogas upgrading allows the concomitant elimination of H<sub>2</sub>S and CO<sub>2</sub> from raw biogas because of the photosynthetic fixation of CO<sub>2</sub> into microalgae biomass and bacterial H<sub>2</sub>S oxidation to sulphate with the O<sub>2</sub> generated during microalgae growth [136]. This process is typically carried out in open or closed photobioreactors interconnected to biogas bubble absorption columns. The nutrients required to allow the lithoautotrophic bacteria growth (which can utilize H<sub>2</sub>S as a source of energy and CO<sub>2</sub> as a source of carbon) and microalgae can be supplied by the aqueous fraction (after centrifugation) of the digestate. This configuration permits nutrients' recovery from anaerobic digestion as algal and bacterial biomass.

Microalgae exhibiting high growth rates (and therefore high CO<sub>2</sub> fixation rates) are preferred in photobioreactors of microalgae and bacterial used for biogas upgrading. Thus, microalgae such as *Nannochloropsis*, *Chlorella* and *Scenedesmus* are desired. However, microalgae population structure in photosynthetic upgrading unit changes with time as a result of the seasonal variations in temperature, irradiation and composition of digestate. In this context, *Pseudanabaena* sp., *Chroococidiopsis* sp., *Chloromonas* sp., *Cyanosarcina* sp., *Synechocystis aquatilis*, *Geitlerinema* sp., *Woronichinia* sp., *Limnothrix* sp. and *Microspora* sp. have been found in open algal ponds devoted to the purification of biogas.

This high rate of growth enhances the environmental sustainability of the process, reduces biogas upgrading operating costs and provides an algal biomass that can be further valorized as a biofertilizer or bio-stimulant [137].

When digestates are employed as a source of water and nutrients, the high concentrations of microalgae potentially generated in the photobioreactor cultivation broth require a biomass harvesting decoupled from the effluent of the photobioreactor, which is typically negligible because of the high evaporation rates to avoid light limitation. The optimal process configuration validated by the Institute of Sustainable Processes at Universidad de Valladolid consists of an open photobioreactor, which entails lower investment and operating costs compared to enclosed counterparts.

The open system allows a fixing microalgae productivity in the system via a controlled biomass wasting. This provides a biomass-free culture broth employed as absorption solution in a bubble column constructed with fine bubble diffusers instead of packed bed absorption units [137]. Figure 14 depicts this configuration.

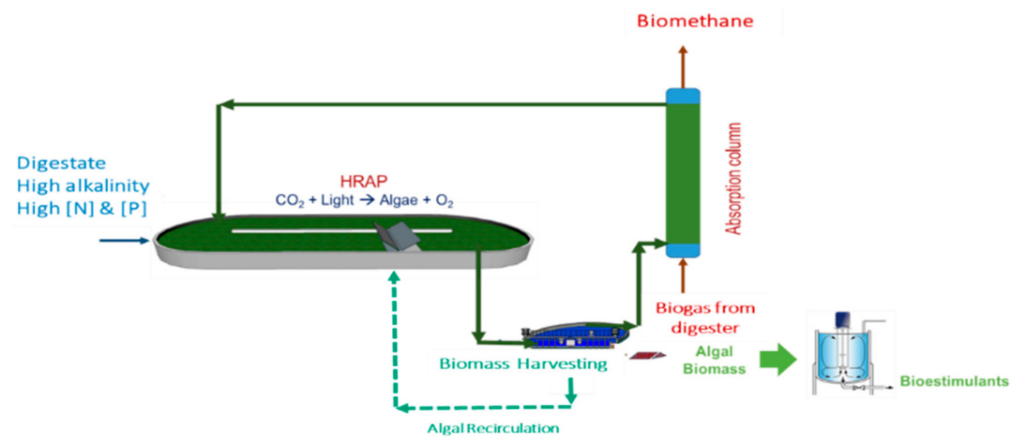


Figure 14. Process configuration of photosynthetic biogas upgrading using digestates.

The main process variables that determine the quality of the upgraded biogas generated and nutrient recovery in algal-bacterial photobioreactors are the pH and alkalinity of the cultivation broth, the liquid to biogas ratio and flow mode operation in the absorption column and microalgae productivity control. Thus, using a cultivation broth as scrubbing solution at a high pH, from 9 to 11, and inorganic carbon between 1200 and 2000 mg/L, guarantees an effective CO<sub>2</sub> and H<sub>2</sub>S absorption in the scrubbing unit, with CO<sub>2</sub> concentrations in the range of 1–2% and negligible H<sub>2</sub>S concentrations typically achieved in optimized systems [104]. Process operation with high microalgae productivities (15–30 g/m<sup>2</sup> d, attained via a high biomass wastage rate from the bottom of the settler) gets a high pH in the culture broth and a large recovery of the digestate nutrients fed to the high-rate algal pond [137]. Finally, the liquid to biogas ratio should be maintained at low values, usually from 1 to 2, preventing an excessive desorption of the dissolved O<sub>2</sub> and N<sub>2</sub> to biomethane. However, the ratio should be high enough to avoid the acidification of the scrubbing solution that it must keep under 8.3 in the column, which would ultimately limit CO<sub>2</sub> absorption. Process operation in co-current flow is preferred in order to avoid sulfur accumulation in the biogas diffusers, which has been observed under counterflow operation [137].

This technology was initially optimized at TLR 5 in indoor and outdoor photobioreactors, both in 180 L high-rate algal ponds or 120 L enclosed tubular photobioreactors, using synthetic biogas and real digestates [138]. In addition, this technology was validated outdoors at TLR 6 in a 10 m<sup>3</sup> high-rate algal pond and in enclosed photobioreactors (11 m<sup>3</sup>) using real industrial and agricultural wastewater under the framework of the European project INCOVER. This project also developed and validated a control strategy capable of providing a high quality biomethane (<2.5% CO<sub>2</sub>; <1% O<sub>2</sub>) in order to cope with inherent variations of light, temperature and pH under outdoor conditions [139]. This technology is being further scaled up to TLR 7 under the framework of the European BBI project URBIOFIN in an 80 m<sup>3</sup> high-rate algal pond fed with urban solid waste digestate and biogas (Figure 15), which represents the last step prior to full-scale implementation.

The major technology bottlenecks identified are [140]: (i) the need to operate at high alkalinity without external addition of chemicals, (ii) poor performance under cold climate conditions, (iii) high solid content and turbidity of digestates and (iv) a poor microalgae settleability hindering biomass productivity control.

Those bottlenecks can be overcome by dosing digestate to compensate water evaporation losses, installing the photobioreactor under a greenhouse, optimizing solid-liquid separation after anaerobic digestion and implementing dissolved air flotation units.

A recent techno-economic analysis, comparing photosynthetic biogas upgrading with a traditional technology (adsorption filter preceding a water scrubbing unit for a reference biogas flow rate of 300 Nm<sup>3</sup>/h), showed that the operating costs of biogas upgrading can decrease from EUR 0.2/Nm<sup>3</sup> to EUR 0.03/Nm<sup>3</sup>. The latter figure including the cost of algal biomass harvesting and drying [137].




**Figure 15.** Photosynthetic biogas upgrading plant under validation in URBIOFIN project.

### 5.3. Microaerobic $H_2S$ Removal into Biological Upgrading Process

Physical and chemical treatments for the desulfurization of biogas have been shown to be more disadvantageous compared with biological treatments in terms of operating costs [141]. Biological biogas desulfurization can be performed either in additional units mainly through biotrickling filters or directly in anaerobic digesters, i.e., by applying microaerobic conditions during the digestion process [142]. Biological treatment of contaminated biogas is a relatively new trend. Other gas desulfurization approaches suffer from high operation costs and produce waste that needs to be disposed of. This method is economically more advantageous and is more environmentally friendly than other techniques. Biological desulfurization of biogas can proceed at lower temperatures and pressures, as well as with limited or no reagent consumption [141].

Microaerobic conditions in a digester are a simple and effective technique for direct  $H_2S$  removal [143,144]. Microaeration consists in dosing a small amount of air or oxygen (0.005–5 L  $O_2$ /L reactor per day) into the AD system. This technique is also known as limited aeration, micro-aeration, oxygenation, micro-oxygenation and microaerobic digestion.

Sulfide oxidation involves the following reactions:



Microaeration exhibits high removal efficiency (up to 99%) and low operating costs and slightly modifies the anaerobic process [141]. Microaerobic removal of  $H_2S$  with the supply of  $O_2$  (93% purity from an  $O_2$  generator) to the headspace of a full-scale digester (2400  $m^3$ ) has been reported for sewage. The average  $H_2S$  concentration in the digester under anaerobic conditions was 1840 ppmv.  $H_2S$  concentration gradually dropped once the microaerobic condition is applied to an average concentration of  $H_2S$  in the biogas of 180 ppmv with a removal efficiency of 90.2%. Operating costs of EUR 0.0011/ $m^3$  of biogas were estimated [145].

The cost of microaerobic processes for treating WWTP sludge with  $FeCl_3$  addition and with the utilization of iron-sponge-bed filter inoculated with thiobacteria has been studied by Díaz et al. [146]. The injection of concentrated  $O_2$  as the most profitable option was reported. Furthermore, it presented the highest robustness towards variations in the price of electricity,  $FeCl_3$  and in the  $H_2S$  concentration.

Microaerobic processes have been applied with success on a full-scale in many agricultural waste and sludge digesters but these results have not been reported. Further research and promotion are needed to design full-scale implementation from current pilot-scale studies [143].

Microaerobic digestion technology has attractive advantages of accelerating hydrolysis, preventing volatile fatty acid accumulation, and resulting in high biogas yields. This method has been suggested as an effective measure for helping to solve the anaerobic digestion

problems and therefore improve the stability of the AD systems [143]. Recent research has also demonstrated that microaerobic digestion is an effective strategy to enhance the biotransformation of recalcitrant compounds and even organic micropollutants [147]. Oxygen dosage is the key factor to achieve the different advantages of the microaerobic processes [148].

## 6. Business Models of Biogas Industry

Biogas is a very versatile energy carrier since it is produced from a wide variety of biomass resources (crop residues, animal manure, the organic fraction of urban and industrial solid waste and wastewater sludge) and it can be used for different energy purposes, such as heat and power by direct combustion or the production of biomethane through upgrading.

A successful biogas plant requires the development of a sustainable business model, and it is necessary to consider some key aspects such as (i) contracting the volume of residues required for the capacity of the plant; (ii) finding the ideal location for the plant; (iii) obtaining the agreements for the sale of biogas/biomethane in advance; (iv) developing the complete business model considering digestion process, biogas and digestate uses, etc.; and (v) searching for investors.

The business model may consider involving partners, utilizing third party investments or other traditional “cooperative” models. The latter includes a centralized digester, in which feedstock coming from different locations are treated, or centralized processing, where biogas and digestate from different digester are processed. Both cases could be owned by a municipality or a third party [149]. Other important parameters for the economic profitability of the biogas production facilities are the plant size, the raw material availability and the transportation related to the feedstock supply. These factors are highly correlated between each other, since larger facilities and/or certain biomass types could need longer distances to meet the feedstock requirements [150].

Therefore, the business models in the biogas industry are quite different and classified according to the raw material used, detailed below.

### 6.1. Biogas from Agri-Food Sector

Different business models have been developed for the agri-food sector, depending on the type of digestion process (mono-digestion or co-digestion) and on the end use of the biogas obtained and valorization of the digestate. The digestion process can use a single waste or substrate (mono-digestion) or two or more substrates (co-digestion). Several studies show that mono-digestion processes are constrained by some factors such as nutritional imbalance, lack of diversified microorganisms and the effect of operational factors. Anaerobic co-digestion processes could help overcome those difficulties, improving the biogas production of the digesters [151]. For example, a bioreactor originally planned to treat agricultural waste could also use municipal bio-waste. In this context, the operator/owner of the treatment plan could charge a tipping fee and increase the final revenues. Several business models can be established depending on the end use of the biogas: both on-site and off-site use of thermal and/or power production, off-site sale of compressed or liquefied biomethane typically used for transportation fuel, both on-site and off-site use of biomethane for injection into the natural gas network or bio-based material generation [152]. Successful business models should contemplate the proper management of the digestate, either disposal in an environmentally correct manner or use as fertilizer, compost or other value-added products to improve the economic profitability of the biogas plant [149].

### 6.2. Biogas from Wastewater Sector

In the wastewater sector, the generated SS is usually transformed into biogas through anaerobic digestion. Through this process, in addition to produce biogas, the sludge is stabilized, and its dry matter content is reduced. Similar to the agri-food sector in Section 6.1, different business models can be developed based on the number of substrates

used in the digestion process, the end use of biogas and the valorization of the resulting digestate (also known as digested sludge) [70].

The main raw material deriving from wastewater treatment plants is the SS, which is composed of primary and secondary sludge (mono-digestion). Each country might promote the co-digestion of such sludge with other organic substrates, such as municipal and industrial bio-wastes, through national legislation mechanisms.

As mentioned before, different options for biogas utilization exits, both on-site and off-site: conversion to heat and/or power or upgrading to biomethane for injection into the natural gas network or for transportation fuels. The best option will depend on the plant size and energy demand. According to the IEA, the minimum recommended plant size for upgrading to biomethane is 100 Nm<sup>3</sup>. For smaller plants, CHP technology would be a more suitable option since CHP technology is less sensitive to biogas plant sizes.

After the anaerobic digestion process, the digested sludge can be used in agriculture after a composting process or be transported to an incineration plant or landfill. The valorization or final disposal of the sludge will depend on legal boundaries and costs.

### 6.3. Biogas from Organic Fraction of Municipal Solid Waste

OFMSW is another interesting source to produce biogas and/or biomethane. However, running a biogas plant based on municipal biowaste is more expensive than treating agri-food residues. This is due to the presence of inert materials such as plastics, glass, metals, etc., which must be removed prior to subjecting biowaste to anaerobic digestion. Pretreatment of biowaste is therefore essential. Different mechanical sorting processes have been developed to remove these contaminants and recover a “clean” biowaste that can be used as substrate for anaerobic digestion [153]. In this regard, THE separate collection of biowaste will become mandatory in the EU in 2023 [22], which will help reduce the inert content of biowaste from households, increasing the possibilities for using biowaste as raw material for biogas plants as an alternative to subjecting it to composting processes.

As stated in the previous sections, different business models can be established for the municipal biowaste according to the type of digestion process, the end use of the biogas obtained and the valorization of the digestate.

The operation mode and type of the AD system can result in different digestion efficiency of the municipal biowaste. Mono-digestion and co-digestion (e.g., SS, energy crops) of municipal biowaste can be contemplated for biogas production to meet the waste characteristics required for an optimal conversion process [154]. In addition, methanogenesis can be performed in the same reactor (single-phase AD systems) or separately (two-phase AD systems). The selection of using either a single-phase or a two-phase system depends directly on the waste characteristics. For instance, single-phase AD systems are preferred for proteinaceous waste, while a two-phase AD system is most suitable for vegetable market waste. Thermophilic digestion is also suitable for AD of municipal biowaste, since it may increase the biogas production potential when compared to the same process at mesophilic conditions [155].

Biogas from OFMSW plants can be upgraded and distributed in the current gas network to be used as fuel for heating/cooling and electricity (replacing natural gas), or directly converted into heat and power in a CHP unit. From an economic point of view, district heating represents an attractive alternative for rural areas (villages with 500–1500 inhabitants), where municipal biowaste is available in lower quantities. In addition, upgrading of the biogas into biomethane and injection into the grid or distributed as fuel, is also feasible at larger scales. For instance, upgrading of biogas to biomethane substantially represents the total use of biogas in Sweden, the Netherlands and Germany [156].

The resulting digestate, from the AD processing of municipal biowaste, can then finally be subjected to composting process to produce fertilizer and soil improver, if the digestate is derived from clean feedstocks. Depending on the quality of the digestate, it can be directly used or mixed with other biowaste prior to the composting processes.

## 7. Conclusions

Biogas can play a major role in local energy systems and it helps to decarbonize the gas grid and transportation sector. Natural gas companies have backed biomethane to introduce renewable energy in their systems.

Large amounts of waste feedstocks are produced worldwide which can be used as raw materials to produce energy. The full use of the potential production of biogas and biomethane could cover up to 20% of the worldwide gas demand. Furthermore, biogas from AD has become more than an energy vector because it treats feedstocks such as animal manure or OFMSW that induce serious environmental concerns.

The biogas upgrading technologies which are more commonly implemented today are water scrubber and chemical absorption, the latter being the cheapest. Depending on the size of the biomethane facility, the tendency is to use membrane upgrading technologies, leaving biological upgrading for small plants. The Power-to-Methane route that uses the electrolysis of water to generate hydrogen gas by renewable energy for hydrogenotrophic biological upgrading emerges as a promising technology in these scenarios.

For a greater development of biogas and biomethane production, it is necessary to establish a new legal framework in which these AD and upgrading technologies are sponsored as they contribute to energy system decarbonization and circular economy mandates.

**Author Contributions:** Conceptualization, R.I. and M.B.; writing—original draft preparation, R.I., A.D.M. and A.S.; writing—review and editing, R.I., A.D.M., A.S., N.C., M.G., R.M., M.P. and I.D.; supervision, R.I. and M.B. All authors have read and agreed to the published version of the manuscript.

**Funding:** This research has been partially funded by the European Union [URBIOFIN project N° 745785; type of action BBI-IA-DEMO call H2020-BBI-JTI-2016] and the Regional Government of Castilla y León and the EU-FEDER program [grant number CLU 2017-09].

**Institutional Review Board Statement:** Not applicable.

**Informed Consent Statement:** Not applicable.

**Data Availability Statement:** Data sharing is not applicable to this article.

**Acknowledgments:** The authors thank the Spanish Biogas Association (AEBIG) for the external support.

**Conflicts of Interest:** The authors declare no conflict of interest.

## References

1. EC. *EU Reference Scenario 2016. Energy, Transport and GHG Emissions; Trends to 2050*; European Commission: Brussels, Belgium, 2016. Available online: [https://ec.europa.eu/energy/sites/ener/files/documents/20160713%20draft\\_publication\\_REF2016\\_v13.pdf](https://ec.europa.eu/energy/sites/ener/files/documents/20160713%20draft_publication_REF2016_v13.pdf) (accessed on 22 December 2020).
2. Advanced Biofuels Coalition. *Leaders of Sustainable Biofuels*; Advanced Biofuels Coalition: Florence, Italy, 2020. Available online: <https://www.advancedbiofuelscoalition.eu/> (accessed on 22 December 2020).
3. EC. *Final Report. Building Up the Future. Sub Group on Advanced Biofuels. Sustainable Transport Forum*; European Commission: Brussels, Belgium, 2017. Available online: <https://ec.europa.eu/transparency/regexpert/index.cfm?do=groupDetail.groupDetailDoc&id=33288&no=1> (accessed on 22 December 2020).
4. IEA. *Integration of Biogas Systems into the Energy System. Technical Aspects of Flexible Plant Operation*; International Energy Agency: Paris, France, 2020. Available online: <https://www.ieabioenergy.com/wp-content/uploads/2020/09/Integration-of-biogas-systems-into-the-energy-system-Report.pdf> (accessed on 22 December 2020).
5. EC. *Report from the Commission to the European Parliament and the Council on Progress of Clean Energy Competitiveness*; European Commission: Brussels, Belgium, 2020. Available online: <https://eur-lex.europa.eu/legal-content/EN/TXT/PDF/?uri=CELEX:52020DC0953&from=EN> (accessed on 22 December 2020).
6. Allegue, L.B.; Hinge, J. *Biogas and Bio-Syngas Upgrading*; Danish Technological Institute: Taastrup, Denmark, 2012. Available online: [https://www.teknologisk.dk/\\_/media/52679\\_Report-Biogas%20and%20syngas%20upgrading.pdf](https://www.teknologisk.dk/_/media/52679_Report-Biogas%20and%20syngas%20upgrading.pdf) (accessed on 22 December 2020).
7. Ryckebosch, E.; Drouillon, M.; Vervaeren, H. Techniques for transformation of biogas to biomethane. *Biomass Bioenergy* **2011**, *35*, 1633–1645. [[CrossRef](#)]
8. Abatzoglou, N.; Boivin, S. A review of biogas purification processes. *Biofuelsbioprod. Biorefin.* **2009**, *3*, 42–71. [[CrossRef](#)]



9. Anneli Petersson, A.W. *Biogas Upgrading Technologies—Developments and Innovations*; International Energy Agency: Paris, France, 2009. Available online: [https://www.iea-biogas.net/files/daten-redaktion/download/publi-task37/upgrading\\_rz\\_low\\_final.pdf](https://www.iea-biogas.net/files/daten-redaktion/download/publi-task37/upgrading_rz_low_final.pdf) (accessed on 22 December 2020).
10. Adnan, A.I.; Ong, M.Y.; Nomanbhay, S.; Chew, K.W.; Show, P.L. Technologies for biogas upgrading to biomethane: A review. *Bioengineering* **2019**, *6*, 92. [CrossRef] [PubMed]
11. Rodero, M.R.; Ángeles, R.; Marín, D.; Díaz, I.; Colzi, A.; Posadas, E.; Lebrero, R.; Muñoz, R. Biogas purification and upgrading technologies. In *Biogas: Fundamentals, Process, and Operation*; Tabatabaei, M., Ghanavati, H., Eds.; Springer International Publishing: Cham, Switzerland, 2018; pp. 239–276.
12. Kougiyas, P.G.; Angelidaki, I. Biogas and its opportunities—A review. *Front. Environ. Sci. Eng.* **2018**, *12*, 14. [CrossRef]
13. BP. *Statistical Review of World Energy*, 69th ed.; BP: Middlesex, UK, 2020. Available online: <https://www.bp.com/content/dam/bp/business-sites/en/global/corporate/pdfs/energy-economics/statistical-review/bp-stats-review-2020-full-report.pdf> (accessed on 20 April 2021).
14. IEA. *Outlook for Biogas and Biomethane. Prospects for Organic Growth*; International Energy Agency: Paris, France, 2020. Available online: <https://www.iea.org/reports/outlook-for-biogas-and-biomethane-prospects-for-organic-growth> (accessed on 22 December 2020).
15. European Biogas Association. *Institutional Web Page*; European Biogas Association: Brussels, Belgium, 2020. Available online: <https://www.europeanbiogas.eu/> (accessed on 22 December 2020).
16. EBA. *EBA Statistical Report 2020*; European Biogas Association: Brussels, Belgium, 2020. Available online: <https://www.europeanbiogas.eu/eba-statistical-report-2020/> (accessed on 20 April 2021).
17. Fachverband. *Biogas Market Data in Germany 2019/2020*; Fachverband Biogas: Freising, Germany, 2020. Available online: [https://www.biogas.org/edcom/webfvb.nsf/id/EN-German-biogas-market-data/\\$file/20-07-23\\_Biogasindustryfigures-2019-2020\\_english.pdf](https://www.biogas.org/edcom/webfvb.nsf/id/EN-German-biogas-market-data/$file/20-07-23_Biogasindustryfigures-2019-2020_english.pdf) (accessed on 1 March 2021).
18. EBA. *EBA Statistical Report 2018*; European Biogas Association: Brussels, Belgium, 2018. Available online: [https://www.europeanbiogas.eu/wp-content/uploads/2019/11/EBA\\_report2018\\_abridged\\_A4\\_vers12\\_220519\\_RZweb.pdf](https://www.europeanbiogas.eu/wp-content/uploads/2019/11/EBA_report2018_abridged_A4_vers12_220519_RZweb.pdf) (accessed on 22 December 2020).
19. Surendra, K.C.; Takara, D.; Hashimoto, A.G.; Khanal, S.K. Biogas as a sustainable energy source for developing countries: Opportunities and challenges. *Renew. Sustain. Energy Rev.* **2014**, *31*, 846–859. [CrossRef]
20. IEA. *Advanced Biofuels—Potential for Cost Reduction*; International Energy Agency: Paris, France, 2020. Available online: <https://www.ieabioenergy.com/blog/publications/new-publication-advanced-biofuels-potential-for-cost-reduction/> (accessed on 22 December 2020).
21. EBA. *The 'European Biomethane Map 2020' Shows a 51% Increase of Biomethane Plants in Europe in Two Years*; European Biogas Association: Brussels, Belgium, 2020. Available online: [https://www.europeanbiogas.eu/wp-content/uploads/2020/06/Biomethane-map\\_Press-Release\\_EBA\\_GiE.pdf](https://www.europeanbiogas.eu/wp-content/uploads/2020/06/Biomethane-map_Press-Release_EBA_GiE.pdf) (accessed on 1 March 2021).
22. EU. *Directive (EU) 2018/2001 of the European Parliament and of the Council of 11 December 2018 on the Promotion of the Use of Energy from Renewable Sources*; Publications Office of the European Union: Luxembourg, 2018. Available online: <https://eur-lex.europa.eu/eli/dir/2018/2001/oj> (accessed on 1 November 2020).
23. EC. *A Sustainable Bioeconomy for Europe: Strengthening the Connection between Economy, Society and the Environment Updated Bioeconomy Strategy*; European Commission: Brussels, Belgium, 2018. Available online: <https://op.europa.eu/en/publication-detail/-/publication/edace3e3-e189-11e8-b690-01aa75ed71a1/language-en/format-PDF/source-149755478> (accessed on 22 December 2020).
24. EC. *Circular Economy Action Plan. For a Cleaner and More Competitive Europe*; European Commission: Brussels, Belgium, 2020. Available online: [https://ec.europa.eu/environment/circular-economy/pdf/new\\_circular\\_economy\\_action\\_plan.pdf](https://ec.europa.eu/environment/circular-economy/pdf/new_circular_economy_action_plan.pdf) (accessed on 22 December 2020).
25. SAF. *Web Page*; Sustainable Agribusiness Forum: Kyiv, Ukraine, 2020. Available online: <https://saf.org.ua/en/news/655/> (accessed on 22 December 2020).
26. Repele, M.; Udrene, L.; Bazbauers, G. Support mechanisms for biomethane production and supply. *Energy Procedia* **2017**, *113*, 304–310. [CrossRef]
27. EurObserv'ER. *Biofuels Barometer 2020*; EurObserv'ER: Paris, France, 2020. Available online: <https://www.eurobserv-er.org/biofuels-barometer-2020/> (accessed on 22 December 2020).
28. Monteny, G.-J.; Bannink, A.; Chadwick, D. Greenhouse gas abatement strategies for animal husbandry. *Agric. Ecosyst. Environ.* **2006**, *112*, 163–170. [CrossRef]
29. Scheftelowitz, M.; Thrän, D. Unlocking the energy potential of manure—An assessment of the biogas production potential at the farm level in Germany. *Agriculture* **2016**, *6*, 20. [CrossRef]
30. Akyürek, Z. Potential of biogas energy from animal waste in the Mediterranean region of Turkey. *J. Energy Syst.* **2018**, 160–167. [CrossRef]
31. Tessele, F.; van Lier, J. Anaerobic digestion and the circular economy. *Water E J.* **2020**, *5*, 1–5. [CrossRef]
32. Cecchi, F.; Bolzonella, D.; Pavan, P.; Macé, S.; Mata-Alvarez, J. Anaerobic digestion of the organic fraction of municipal solid waste for methane production: Research and industrial application. In *Comprehensive Biotechnology*, 2nd ed.; Moo-Young, M., Ed.; Academic Press: Burlington, NJ, USA, 2011; pp. 463–472.

33. Curry, R.; Pérez-Camacho, M.N.; Brennan, R.; Gilkinson, S.; Cromie, T.; Foster, P.; Smyth, B.; Orozco, A.; Groom, E.; Murray, S.; et al. Quantification of anaerobic digestion feedstocks for a regional bioeconomy. *Proc. Inst. Civ. Eng. Waste Resour. Manag.* **2018**, *171*, 94–103. [CrossRef]
34. Steffen, R.; Szolar, O.; Braun, R. *Feedstocks for Anaerobic Digestion*; Department of Agrobiotechnology Tulln, University of Natural Resources and Life Science: Vienna, Austria, 1998. Available online: <http://citeseerx.ist.psu.edu/viewdoc/download?doi=10.1.1.487.370&rep=rep1&type=pdf> (accessed on 20 December 2020).
35. Frigon, J.-C.; Guiot, S.R. Biomethane production from starch and lignocellulosic crops: A comparative review. *Biofuelsbioproducts Biorefining* **2010**, *4*, 447–458. [CrossRef]
36. Frigon, J.-C.; Mehta, P.; Guiot, S.R. Impact of mechanical, chemical and enzymatic pre-treatments on the methane yield from the anaerobic digestion of switchgrass. *Biomass Bioenergy* **2012**, *36*, 1–11. [CrossRef]
37. Herrmann, C.; Idler, C.; Heiermann, M. Biogas crops grown in energy crop rotations: Linking chemical composition and methane production characteristics. *Bioresour. Technol.* **2016**, *206*, 23–35. [CrossRef] [PubMed]
38. Himanshu, H.; Murphy, J.D.; Grant, J.; O'Kiely, P. Synergies from co-digesting grass or clover silages with cattle slurry in in vitro batch anaerobic digestion. *Renew. Energy* **2018**, *127*, 474–480. [CrossRef]
39. Mulat, D.G.; Dibdiakova, J.; Horn, S.J. Microbial biogas production from hydrolysis lignin: Insight into lignin structural changes. *Biotechnol. Biofuels* **2018**, *11*, 61. [CrossRef]
40. Mustafa, A.M.; Poulsen, T.G.; Sheng, K. Fungal pretreatment of rice straw with *Pleurotus ostreatus* and *Trichoderma reesei* to enhance methane production under solid-state anaerobic digestion. *Appl. Energy* **2016**, *180*, 661–671. [CrossRef]
41. Oleszek, M.; Król, A.; Tys, J.; Matyka, M.; Kulik, M. Comparison of biogas production from wild and cultivated varieties of reed canary grass. *Bioresour. Technol.* **2014**, *156*, 303–306. [CrossRef]
42. Wahid, R.; Nielsen, S.F.; Hernandez, V.M.; Ward, A.J.; Gislum, R.; Jørgensen, U.; Møller, H.B. Methane production potential from *Miscanthus* sp.: Effect of harvesting time, genotypes and plant fractions. *Biosyst. Eng.* **2015**, *133*, 71–80. [CrossRef]
43. Xu, N.; Liu, S.; Xin, F.; Zhou, J.; Jia, H.; Xu, J.; Jiang, M.; Dong, W. Biomethane production from lignocellulose: Biomass recalcitrance and its impacts on anaerobic digestion. *Front. Bioeng. Biotechnol.* **2019**, *7*, 191. [CrossRef] [PubMed]
44. Naran, E.; Toor, U.A.; Kim, D.-J. Effect of pretreatment and anaerobic co-digestion of food waste and waste activated sludge on stabilization and methane production. *Int. Biodeterior. Biodegrad.* **2016**, *113*, 17–21. [CrossRef]
45. Mata-Alvarez, J.; Dosta, J.; Romero-Güiza, M.S.; Fonoll, X.; Peces, M.; Astals, S. A critical review on anaerobic co-digestion achievements between 2010 and 2013. *Renew. Sustain. Energy Rev.* **2014**, *36*, 412–427. [CrossRef]
46. Mata-Alvarez, J.; Macé, S.; Llabrés, P. Anaerobic digestion of organic solid wastes. An overview of research achievements and perspectives. *Bioresour. Technol.* **2000**, *74*, 3–16. [CrossRef]
47. Angelidaki, I.; Ellegaard, L. Codigestion of manure and organic wastes in centralized biogas plants: Status and future trends. *Appl. Biochem. Biotechnol.* **2003**, *109*, 95–106. [CrossRef]
48. Esposito, G.; Frunzo, L.; Giordano, A.; Liotta, F.; Panico, A.; Pirozzi, F. Anaerobic co-digestion of organic wastes. *Rev. Environ. Sci. Bio/Technol.* **2012**, *11*, 325–341. [CrossRef]
49. Tyagi, V.K.; Fdez-Güelfo, L.A.; Zhou, Y.; Álvarez-Gallego, C.J.; Garcia, L.I.R.; Ng, W.J. Anaerobic co-digestion of organic fraction of municipal solid waste (OFMSW): Progress and challenges. *Renew. Sustain. Energy Rev.* **2018**, *93*, 380–399. [CrossRef]
50. Mao, C.; Feng, Y.; Wang, X.; Ren, G. Review on research achievements of biogas from anaerobic digestion. *Renew. Sustain. Energy Rev.* **2015**, *45*, 540–555. [CrossRef]
51. Van, D.P.; Fujiwara, T.; Leu Tho, B.; Song Toan, P.P.; Hoang Minh, G. A review of anaerobic digestion systems for biodegradable waste: Configurations, operating parameters, and current trends. *Environ. Eng. Res.* **2019**, *25*, 1–17. [CrossRef]
52. Hoornweg, D.; Bhada-Tata, P. *What a Waste: A Global Review of Solid Waste Management*; World Bank: Washington, DC, USA, 2012. Available online: <https://openknowledge.worldbank.org/handle/10986/17388> (accessed on 20 December 2020).
53. Campuzano, R.; González-Martínez, S. Characteristics of the organic fraction of municipal solid waste and methane production: A review. *Waste Manag.* **2016**, *54*, 3–12. [CrossRef]
54. FAO. *World Livestock: Transforming the Livestock Sector through the Sustainable Development Goals*; Food and Agriculture Organization of the United Nations: Rome, Italy, 2018. Available online: <http://www.fao.org/3/CA1201EN/ca1201en.pdf> (accessed on 20 December 2020).
55. Meat Atlas. *Facts and Figures about the ANIMALS we Eat*. Berlin, Germany; Heinrich Böll Foundation and Friends of the Earth Europe: Brussels, Belgium, 2014. Available online: [https://www.foeeurope.org/sites/default/files/publications/foee\\_hbf\\_meatatlas\\_jan2014.pdf](https://www.foeeurope.org/sites/default/files/publications/foee_hbf_meatatlas_jan2014.pdf) (accessed on 20 December 2020).
56. FAO. *Meat Sources*; Food and Agriculture organization of the United Nations: Rome, Italy, 2014. Available online: [http://www.fao.org/ag/againfo/themes/es/meat/backgr\\_sources.html](http://www.fao.org/ag/againfo/themes/es/meat/backgr_sources.html) (accessed on 20 December 2020).
57. Ogbuewu, I.P.; Odoemenam, V.U.; Obikaonu, H.O.; Opara, M.N.; Emenalom, O.O.; Uchegbu, M.C.; Okoli, I.C.; Esonu, B.O.; Iloje, M.U. The growing importance of neem (*Azadirachta indica* A. Juss) in agriculture, industry, medicine and environment: A review. *Res. J. Med. Plant* **2011**, *5*, 230–245. [CrossRef]
58. Chadwick, D.; Sommer, S.; Thorman, R.; Fanguero, D.; Cardenas, L.; Amon, B.; Misselbrook, T. Manure management: Implications for greenhouse gas emissions. *Anim. Feed Sci. Technol.* **2011**, *166–167*, 514–531. [CrossRef]
59. Van Dijk, K.C.; Lesschen, J.P.; Oenema, O. Phosphorus flows and balances of the European Union Member States. *Sci. Total Environ.* **2016**, *542*, 1078–1093. [CrossRef] [PubMed]

60. Velthof, G.L.; Lesschen, J.P.; Webb, J.; Pietrzak, S.; Miatkowski, Z.; Pinto, M.; Kros, J.; Oenema, O. The impact of the Nitrates Directive on nitrogen emissions from agriculture in the EU-27 during 2000–2008. *Sci. Total Environ.* **2014**, *468–469*, 1225–1233. [CrossRef]
61. Webb, J.; Sommer, S.G.; Kupper, T.; Groenestein, K.; Hutchings, N.J.; Eurich-Menden, B.; Rodhe, L.; Misselbrook, T.H.; Amon, B. Emissions of ammonia, nitrous oxide and methane during the management of solid manures. In *Agroecology and Strategies for Climate Change*; Lichtfouse, E., Ed.; Springer: Dordrecht, The Netherlands, 2012; pp. 67–107.
62. Nielsen, H.B.; Mladenovska, Z.; Westermann, P.; Ahring, B.K. Comparison of two-stage thermophilic (68 °C/55 °C) anaerobic digestion with one-stage thermophilic (55 °C) digestion of cattle manure. *Biotechnol. Bioeng.* **2004**, *86*, 291–300. [CrossRef]
63. Tallou, A.; Haouas, A.; Jamali, M.Y.; Atif, K.; Amir, S.; Aziz, F. Review on cow manure as renewable energy. In *Smart Village Technology: Concepts and Developments*; Patnaik, S., Sen, S., Mahmoud, M.S., Eds.; Springer International Publishing: Cham, Switzerland, 2020; pp. 341–352.
64. Issah, A.-A.; Kabera, T.; Kemausuor, F. Biogas optimisation processes and effluent quality: A review. *Biomass Bioenergy* **2020**, *133*, 105449. [CrossRef]
65. Nasir, I.M.; Mohd Ghazi, T.I.; Omar, R. Anaerobic digestion technology in livestock manure treatment for biogas production: A review. *Eng. Life Sci.* **2012**, *12*, 258–269. [CrossRef]
66. Tsapekos, P.; Kougias, P.G.; Frison, A.; Raga, R.; Angelidaki, I. Improving methane production from digested manure biofibers by mechanical and thermal alkaline pretreatment. *Bioresour. Technol.* **2016**, *216*, 545–552. [CrossRef]
67. Meneses-Quelal, O.; Velázquez-Martí, B. Pretreatment of animal manure biomass to improve biogas production: A review. *Energies* **2020**, *13*, 3573.
68. Appels, L.; Baeyens, J.; Degève, J.; Dewil, R. Principles and potential of the anaerobic digestion of waste-activated sludge. *Prog. Energy Combust. Sci.* **2008**, *34*, 755–781. [CrossRef]
69. Caporgno, M.P.; Trobajo, R.; Caiola, N.; Ibáñez, C.; Fabregat, A.; Bengoa, C. Biogas production from sewage sludge and microalgae co-digestion under mesophilic and thermophilic conditions. *Renew. Energy* **2015**, *75*, 374–380. [CrossRef]
70. Bachmann, N. *Sustainable Biogas Production in Municipal Wastewater Treatment Plants*; International Energy Agency: Paris, France, 2015. Available online: [https://task37.ieabioenergy.com/files/daten-redaktion/download/Technical%20Brochures/Wastewater\\_biogas\\_grey\\_web-1.pdf](https://task37.ieabioenergy.com/files/daten-redaktion/download/Technical%20Brochures/Wastewater_biogas_grey_web-1.pdf) (accessed on 22 December 2020).
71. VSA. *Energie in ARA, Leitfaden zur Energieoptimierung auf Abwasserreinigungsanlagen*; Handbuch im Auftrag des Bundesamtes für Energie und des Verband Schweizer Abwasser: Glattbrugg, Switzerland, 2010. Available online: <https://vsa.ch/Mediathek/energie-in-ara/> (accessed on 20 December 2020).
72. Zhang, H.J. *Sludge Treatment to Increase Biogas Production. Trita-LWR Degree Project 10–20 [Degree Project]*; Royal Institute of Technology (KTH): Stockholm, Sweden, 2010.
73. Al Seadi, T.; Lukehurst, C. *Quality Management of Digestate from Biogas Plants Used as Fertiliser*; IEA Bioenergy: Paris, France, 2012. Available online: [https://www.ieabioenergy.com/wp-content/uploads/2012/05/digestate\\_quality\\_web\\_new.pdf](https://www.ieabioenergy.com/wp-content/uploads/2012/05/digestate_quality_web_new.pdf) (accessed on 20 December 2020).
74. Matsakas, L.; Rova, U.; Christakopoulos, P. Strategies for enhanced biogas generation through anaerobic digestion of forest material—An overview. *BioResources* **2016**, *11*, 5482–5499.
75. Sawatdeenarunat, C.; Nguyen, D.; Surendra, K.C.; Shrestha, S.; Rajendran, K.; Oechsner, H.; Xie, L.; Khanal, S.K. Anaerobic biorefinery: Current status, challenges, and opportunities. *Bioresour. Technol.* **2016**, *215*, 304–313. [CrossRef]
76. García-Pérez, M.; Chaala, A.; Pakdel, H.; Kretschmer, D.; Roy, C. Vacuum pyrolysis of softwood and hardwood biomass. *J. Anal. Appl. Pyrolysis* **2007**, *78*, 104–116. [CrossRef]
77. Matsakas, L.; Rova, U.; Christakopoulos, P. Sequential parametric optimization of methane production from different sources of forest raw material. *Front. Microbiol.* **2015**, *6*, 1163. [CrossRef]
78. Salehian, P.; Karimi, K.; Zilouei, H.; Jeyhanipour, A. Improvement of biogas production from pine wood by alkali pretreatment. *Fuel* **2013**, *106*, 484–489. [CrossRef]
79. FAO. *Global Food Losses and Food Waste—Extent, Causes and Prevention*; The Food and Agriculture Organization of the United Nations: Rome, Italy, 2011. Available online: <http://www.fao.org/3/mb060e/mb060e00.pdf> (accessed on 20 December 2020).
80. Papargyropoulou, E.; Lozano, R.; Steinberger, J.K.; Wright, N.; bin Ujang, Z. The food waste hierarchy as a framework for the management of food surplus and food waste. *J. Clean. Prod.* **2014**, *76*, 106–115. [CrossRef]
81. Slorach, P.C.; Jeswani, H.K.; Cuéllar-Franca, R.; Azapagic, A. Environmental sustainability of anaerobic digestion of household food waste. *J. Environ. Manag.* **2019**, *236*, 798–814. [CrossRef]
82. García-Peña, E.I.; Parameswaran, P.; Kang, D.W.; Canul-Chan, M.; Krajmalnik-Brown, R. Anaerobic digestion and co-digestion processes of vegetable and fruit residues: Process and microbial ecology. *Bioresour. Technol.* **2011**, *102*, 9447–9455. [CrossRef] [PubMed]
83. Zuo, Z.; Wu, S.; Zhang, W.; Dong, R. Effects of organic loading rate and effluent recirculation on the performance of two-stage anaerobic digestion of vegetable waste. *Bioresour. Technol.* **2013**, *146*, 556–561. [CrossRef] [PubMed]
84. Ruggeri, B.; Luongo Malave, A.C.; Bernardi, M.; Fino, D. Energy efficacy used to score organic refuse pretreatment processes for hydrogen anaerobic production. *Waste Manag.* **2013**, *33*, 2225–2233. [CrossRef]
85. Gunaseelan, V.N. Biochemical methane potential of fruits and vegetable solid waste feedstocks. *Biomass Bioenergy* **2004**, *26*, 389–399. [CrossRef]

86. Lay, C.-H.; Vo, T.-P.; Lin, P.-Y.; Abdul, P.M.; Liu, C.-M.; Lin, C.-Y. Anaerobic hydrogen and methane production from low-strength beverage wastewater. *Int. J. Hydrogen Energy* **2019**, *44*, 14351–14361. [CrossRef]
87. Ma, B.; Peng, Y.; Zhang, S.; Wang, J.; Gan, Y.; Chang, J.; Wang, S.; Wang, S.; Zhu, G. Performance of anammox UASB reactor treating low strength wastewater under moderate and low temperatures. *Bioresour. Technol.* **2013**, *129*, 606–611. [CrossRef] [PubMed]
88. Singh, K.S.; Harada, H.; Viraraghavan, T. Low-strength wastewater treatment by a UASB reactor. *Bioresour. Technol.* **1996**, *55*, 187–194. [CrossRef]
89. Ganesh Saratale, R.; Kumar, G.; Banu, R.; Xia, A.; Periyasamy, S.; Dattatraya Saratale, G. A critical review on anaerobic digestion of microalgae and macroalgae and co-digestion of biomass for enhanced methane generation. *Bioresour. Technol.* **2018**, *262*, 319–332. [CrossRef]
90. Xia, A.; Cheng, J.; Song, W.; Su, H.; Ding, L.; Lin, R.; Lu, H.; Liu, J.; Zhou, J.; Cen, K. Fermentative hydrogen production using algal biomass as feedstock. *Renew. Sustain. Energy Rev.* **2015**, *51*, 209–230. [CrossRef]
91. González-Fernández, C.; Sialve, B.; Bernet, N.; Steyer, J.-P. Impact of microalgae characteristics on their conversion to biofuel. Part II: Focus on biomethane production. *Biofuelsbioprod. Biorefin.* **2012**, *6*, 205–218. [CrossRef]
92. González-Fernández, C.; Sialve, B.; Bernet, N.; Steyer, J.P. Comparison of ultrasound and thermal pretreatment of *Scenedesmus* biomass on methane production. *Bioresour. Technol.* **2012**, *110*, 610–616. [CrossRef]
93. Polakovičová, G.; Kušnir, P.; Nagyová, S.; Mikulec, J. Process integration of algae production and anaerobic digestion. *Chem. Eng. Trans.* **2012**, *29*, 1129–1134.
94. González-Fernández, C.; Sialve, B.; Bernet, N.; Steyer, J.P. Effect of organic loading rate on anaerobic digestion of thermally pretreated *Scenedesmus* sp. biomass. *Bioresour. Technol.* **2013**, *129*, 219–223. [CrossRef] [PubMed]
95. Keymer, P.; Ruffell, I.; Pratt, S.; Lant, P. High pressure thermal hydrolysis as pre-treatment to increase the methane yield during anaerobic digestion of microalgae. *Bioresour. Technol.* **2013**, *131*, 128–133. [CrossRef] [PubMed]
96. Schwede, S.; Rehman, Z.-U.; Gerber, M.; Theiss, C.; Span, R. Effects of thermal pretreatment on anaerobic digestion of *Nannochloropsis salina* biomass. *Bioresour. Technol.* **2013**, *143*, 505–511. [CrossRef]
97. Ayala-Parra, P.; Liu, Y.; Field, J.A.; Sierra-Alvarez, R. Nutrient recovery and biogas generation from the anaerobic digestion of waste biomass from algal biofuel production. *Renew. Energy* **2017**, *108*, 410–416. [CrossRef]
98. Samson, R.; LeDuy, A. Improved performance of anaerobic digestion of *Spirulina maxima* algal biomass by addition of carbon-rich wastes. *Biotechnol. Lett.* **1983**, *5*, 677–682. [CrossRef]
99. Zhong, W.; Zhang, Z.; Luo, Y.; Qiao, W.; Xiao, M.; Zhang, M. Biogas productivity by co-digesting Taihu blue algae with corn straw as an external carbon source. *Bioresour. Technol.* **2012**, *114*, 281–286. [CrossRef]
100. IEA. *Institutional Web Page*; International Energy Agency: Paris, France, 2020. Available online: <http://task37.ieabioenergy.com/plant-list.html> (accessed on 22 December 2020).
101. Ullah Khan, I.; Hafiz Dzarfan Othman, M.; Hashim, H.; Matsuura, T.; Ismail, A.F.; Rezaei-DashtArzhandi, M.; Wan Azelee, I. Biogas as a renewable energy fuel—A review of biogas upgrading, utilisation and storage. *Energy Convers. Manag.* **2017**, *150*, 277–294. [CrossRef]
102. Angelidaki, I.; Treu, L.; Tsapekos, P.; Luo, G.; Campanaro, S.; Wenzel, H.; Kougias, P.G. Biogas upgrading and utilization: Current status and perspectives. *Biotechnol. Adv.* **2018**, *36*, 452–466. [CrossRef]
103. Muñoz, R.; Meier, L.; Diaz, I.; Jeison, D. A review on the state-of-the-art of physical/chemical and biological technologies for biogas upgrading. *Rev. Environ. Sci. Bio/Technol.* **2015**, *14*, 727–759. [CrossRef]
104. Rodero, M.d.R.; Posadas, E.; Toledo-Cervantes, A.; Lebrero, R.; Muñoz, R. Influence of alkalinity and temperature on photosynthetic biogas upgrading efficiency in high rate algal ponds. *Algal Res.* **2018**, *33*, 284–290. [CrossRef]
105. Bauer, F.; Persson, T.; Hulteberg, C.; Tamm, D. Biogas upgrading—Technology overview, comparison and perspectives for the future. *Biofuelsbioprod. Biorefin.* **2013**, *7*, 499–511. [CrossRef]
106. Angelidaki, I.; Xie, L.; Luo, G.; Zhang, Y.; Oechsner, H.; Lemmer, A.; Munoz, R.; Kougias, P.G. Chapter 33—Biogas Upgrading: Current and Emerging Technologies. In *Biofuels: Alternative Feedstocks and Conversion Processes for the Production of Liquid and Gaseous Biofuels*, 2nd ed.; Pandey, A., Larroche, C., Dussap, C.-G., Gnansounou, E., Khanal, S.K., Ricke, S., Eds.; Academic Press: London, UK, 2019; pp. 817–843.
107. Chen, X.Y.; Vinh-Thang, H.; Ramirez, A.A.; Rodrigue, D.; Kaliaguine, S. Membrane gas separation technologies for biogas upgrading. *RSC Adv.* **2015**, *5*, 24399–24448. [CrossRef]
108. Makaruk, A.; Miltner, M.; Harasek, M. Membrane biogas upgrading processes for the production of natural gas substitute. *Sep. Purif. Technol.* **2010**, *74*, 83–92. [CrossRef]
109. Navigant. *Gas for Climate. The Optimal Role for Gas in a Net-Zero Emissions Energy System*; Navigant: Utrecht, The Netherlands, 2019. Available online: <https://www.europeanbiogas.eu/wp-content/uploads/2019/11/GfC-study-The-optimal-role-for-gas-in-a-net-zero-emissions-energy-system.pdf> (accessed on 22 December 2020).
110. IEA. *Average Costs of Biogas Production Technologies Per Unit of Energy Produced (Excluding Feedstock)*; International Energy Agency: Paris, France, 2018. Available online: <https://www.iea.org/data-and-statistics/charts/average-costs-of-biogas-production-technologies-per-unit-of-energy-produced-excluding-feedstock-2018> (accessed on 22 December 2020).
111. Ardolino, F.; Cardamone, G.F.; Parrillo, F.; Arena, U. Biogas-to-biomethane upgrading: A comparative review and assessment in a life cycle perspective. *Renew. Sustain. Energy Rev.* **2020**, *139*, 110588. [CrossRef]

112. Martín-Hernández, E.; Guerras, L.S.; Martín, M. Optimal technology selection for the biogas upgrading to biomethane. *J. Clean. Prod.* **2020**, *267*, 122032. [[CrossRef](#)]
113. Niederbacher, M. *Biometano Agricolo e Industriale: La Nuovasfida per l'Autotrazione*; BTS Biogas: Verona, Italy, 2017.
114. Satinover, S.J.; Schell, D.; Borole, A.P. Achieving high hydrogen productivities of 20 L/L-day via microbial electrolysis of corn stover fermentation products. *Appl. Energy* **2020**, *259*, 114126. [[CrossRef](#)]
115. Zhou, H.; Xing, D.; Xu, M.; Su, Y.; Ma, J.; Angelidaki, I.; Zhang, Y. Optimization of a newly developed electromethanogenesis for the highest record of methane production. *J. Hazard. Mater.* **2020**, *407*, 124363. [[CrossRef](#)]
116. Viessmann. *Power-to-Gas Plant Put into Operation*; Viessmann: Allendor, Germany, 2015. Available online: [https://www.viessmann.ae/content/dam/vi-brands/AE/Press/Press%20PDF/Power-to-gas\\_plant\\_put\\_into\\_operation.pdf/\\_jcr\\_content/renditions/original.media\\_file.download\\_attachment.file/Power-to-gas\\_plant\\_put\\_into\\_operation.pdf](https://www.viessmann.ae/content/dam/vi-brands/AE/Press/Press%20PDF/Power-to-gas_plant_put_into_operation.pdf/_jcr_content/renditions/original.media_file.download_attachment.file/Power-to-gas_plant_put_into_operation.pdf) (accessed on 1 March 2021).
117. Electrochaea. *Market Opportunity*; Electrochaea GmbH: Planegg, Germany, 2021. Available online: <http://www.electrochaea.com/market/> (accessed on 1 March 2021).
118. Wulf, C.; Zapp, P.; Schreiber, A. Review of power-to-X demonstration projects in Europe. *Front. Energy Res.* **2020**, *8*, 191. [[CrossRef](#)]
119. Vo, T.T.Q.; Wall, D.M.; Ring, D.; Rajendran, K.; Murphy, J.D. Techno-economic analysis of biogas upgrading via amine scrubber, carbon capture and *ex-situ* methanation. *Appl. Energy* **2018**, *212*, 1191–1202. [[CrossRef](#)]
120. Savvas, S.; Donnelly, J.; Patterson, T.; Chong, Z.S.; Esteves, S.R. Biological methanation of CO<sub>2</sub> in a novel biofilm plug-flow reactor: A high rate and low parasitic energy process. *Appl. Energy* **2017**, *202*, 238–247. [[CrossRef](#)]
121. Dupnock, T.L.; Deshusses, M.A. Detailed investigations of dissolved hydrogen and hydrogen mass transfer in a biotrickling filter for upgrading biogas. *Bioresour. Technol.* **2019**, *290*, 121780. [[CrossRef](#)] [[PubMed](#)]
122. Porté, H.; Kougias, P.G.; Alfaro, N.; Treu, L.; Campanaro, S.; Angelidaki, I. Process performance and microbial community structure in thermophilic trickling biofilter reactors for biogas upgrading. *Sci. Total Environ.* **2019**, *655*, 529–538. [[CrossRef](#)]
123. Jensen, M.B.; Strübing, D.; de Jonge, N.; Nielsen, J.L.; Ottosen, L.D.M.; Koch, K.; Kofoed, M.V.W. Stick or leave—Pushing methanogens to biofilm formation for *ex situ* biomethanation. *Bioresour. Technol.* **2019**, *291*, 121784. [[CrossRef](#)]
124. Bassani, I.; Kougias, P.G.; Treu, L.; Angelidaki, I. Biogas upgrading via hydrogenotrophic methanogenesis in two-stage continuous stirred tank reactors at mesophilic and thermophilic conditions. *Environ. Sci. Technol.* **2015**, *49*, 12585–12593. [[CrossRef](#)]
125. Zhang, F.; Zhang, Y.; Ding, J.; Dai, K.; van Loosdrecht, M.C.M.; Zeng, R.J. Stable acetate production in extreme-thermophilic (70 °C) mixed culture fermentation by selective enrichment of hydrogenotrophic methanogens. *Sci. Rep.* **2014**, *4*, 5268. [[CrossRef](#)] [[PubMed](#)]
126. Zhu, X.; Campanaro, S.; Treu, L.; Kougias, P.G.; Angelidaki, I. Novel ecological insights and functional roles during anaerobic digestion of saccharides unveiled by genome-centric metagenomics. *Water Res.* **2019**, *151*, 271–279. [[CrossRef](#)]
127. Burkhardt, M.; Jordan, I.; Heinrich, S.; Behrens, J.; Ziesche, A.; Busch, G. Long term and demand-oriented biocatalytic synthesis of highly concentrated methane in a trickle bed reactor. *Appl. Energy* **2019**, *240*, 818–826. [[CrossRef](#)]
128. Ullrich, T.; Lindner, J.; Bär, K.; Mörs, F.; Graf, F.; Lemmer, A. Influence of operating pressure on the biological hydrogen methanation in trickle-bed reactors. *Bioresour. Technol.* **2018**, *247*, 7–13. [[CrossRef](#)] [[PubMed](#)]
129. Jensen, M.B.; Kofoed, M.V.W.; Fischer, K.; Voigt, N.V.; Agneessens, L.M.; Batstone, D.J.; Ottosen, L.D.M. Venturi-type injection system as a potential H<sub>2</sub> mass transfer technology for full-scale *in situ* biomethanation. *Appl. Energy* **2018**, *222*, 840–846. [[CrossRef](#)]
130. Alfaro, N.; Fdz-Polanco, M.; Fdz-Polanco, F.; Díaz, I. H<sub>2</sub> addition through a submerged membrane for *in-situ* biogas upgrading in the anaerobic digestion of sewage sludge. *Bioresour. Technol.* **2019**, *280*, 1–8. [[CrossRef](#)]
131. Xu, H.; Wang, K.; Zhang, X.; Gong, H.; Xia, Y.; Holmes, D.E. Application of *in-situ* H<sub>2</sub>-assisted biogas upgrading in high-rate anaerobic wastewater treatment. *Bioresour. Technol.* **2020**, *299*, 122598. [[CrossRef](#)] [[PubMed](#)]
132. Agneessens, L.M.; Ottosen, L.D.M.; Andersen, M.; Berg Olesen, C.; Feilberg, A.; Kofoed, M.V.W. Parameters affecting acetate concentrations during *in-situ* biological hydrogen methanation. *Bioresour. Technol.* **2018**, *258*, 33–40. [[CrossRef](#)] [[PubMed](#)]
133. Corbellini, V.; Kougias, P.G.; Treu, L.; Bassani, I.; Malpei, F.; Angelidaki, I. Hybrid biogas upgrading in a two-stage thermophilic reactor. *Energy Convers. Manag.* **2018**, *168*, 1–10. [[CrossRef](#)]
134. Díaz, I.; Fdz-Polanco, F.; Mutsvene, B.; Fdz-Polanco, M. Effect of operating pressure on direct biomethane production from carbon dioxide and exogenous hydrogen in the anaerobic digestion of sewage sludge. *Appl. Energy* **2020**, *280*, 115915. [[CrossRef](#)]
135. Kim, S.; Mostafa, A.; Im, S.; Lee, M.-K.; Kang, S.; Na, J.-G.; Kim, D.-H. Production of high-calorific biogas from food waste by integrating two approaches: Autogenerative high-pressure and hydrogen injection. *Water Res.* **2021**, *194*, 116920. [[CrossRef](#)]
136. Bahr, M.; Diaz, I.; Dominguez, A.; Gonzalez Sanchez, A.; Munoz, R. Microalgal-biotechnology as a platform for an integral biogas upgrading and nutrient removal from anaerobic effluents. *Environ. Sci. Technol.* **2014**, *48*, 573–581. [[CrossRef](#)] [[PubMed](#)]
137. Toledo-Cervantes, A.; Estrada, J.M.; Lebrero, R.; Muñoz, R. A comparative analysis of biogas upgrading technologies: Photosynthetic *vs* physical/chemical processes. *Algal Res.* **2017**, *25*, 237–243. [[CrossRef](#)]
138. Ángeles, R.; Arnaiz, E.; Gutiérrez, J.; Sepúlveda-Muñoz, C.A.; Fernández-Ramos, O.; Muñoz, R.; Lebrero, R. Optimization of photosynthetic biogas upgrading in closed photobioreactors combined with algal biomass production. *J. Water Process Eng.* **2020**, *38*, 101554. [[CrossRef](#)]
139. Rodero, M.d.R.; Carvajal, A.; Arbib, Z.; Lara, E.; de Prada, C.; Lebrero, R.; Muñoz, R. Performance evaluation of a control strategy for photosynthetic biogas upgrading in a semi-industrial scale photobioreactor. *Bioresour. Technol.* **2020**, *307*, 123207. [[CrossRef](#)]
140. Marín, D.; Carmona-Martínez, A.A.; Blanco, S.; Lebrero, R.; Muñoz, R. Innovative operational strategies in photosynthetic biogas upgrading in an outdoors pilot scale algal-bacterial photobioreactor. *Chemosphere* **2021**, *264*, 128470. [[CrossRef](#)]

141. Khoshnevisan, B.; Tsapekos, P.; Alfaro, N.; Díaz, I.; Fdz-Polanco, M.; Rafiee, S.; Angelidaki, I. A review on prospects and challenges of biological H<sub>2</sub>S removal from biogas with focus on biotrickling filtration and microaerobic desulfurization. *Biofuel Res. J.* **2017**, *4*, 741–750. [[CrossRef](#)]
142. Ramos, I.; Pérez, R.; Fdz-Polanco, M. Microaerobic desulphurisation unit: A new biological system for the removal of H<sub>2</sub>S from biogas. *Bioresour. Technol.* **2013**, *142*, 633–640. [[CrossRef](#)]
143. Chen, Q.; Wu, W.; Qi, D.; Ding, Y.; Zhao, Z. Review on microaeration-based anaerobic digestion: State of the art, challenges, and prospectives. *Sci. Total Environ.* **2020**, *710*, 136388. [[CrossRef](#)]
144. Ramos, I.; Peña, M.; Fdz-Polanco, M. Where does the removal of H<sub>2</sub>S from biogas occur in microaerobic reactors? *Bioresour. Technol.* **2014**, *166*, 151–157. [[CrossRef](#)] [[PubMed](#)]
145. Alfaro, N.; Díaz, I.; Fdz-Polanco, M.; Romero, M. Start-up of microaerobic removal of H<sub>2</sub>S from biogas in full-scale digestion of sewage sludge. In Proceedings of the 15th IWA World Conference on Anaerobic Digestion (AD-15), Beijing, China, 17–20 October 2017.
146. Díaz, I.; Ramos, I.; Fdz-Polanco, M. Economic analysis of microaerobic removal of H<sub>2</sub>S from biogas in full-scale sludge digesters. *Bioresour. Technol.* **2015**, *192*, 280–286. [[CrossRef](#)] [[PubMed](#)]
147. Do Nascimento, J.G.D.S.; de Araújo, M.H.P.; dos Santos, A.B.; da Silva, M.E.R.; Firmino, P.I.M. Redox mediator, microaeration, and nitrate addition as engineering approaches to enhance the biotransformation of antibiotics in anaerobic reactors. *J. Hazard. Mater.* **2021**, *403*, 123932. [[CrossRef](#)] [[PubMed](#)]
148. Nguyen, D.; Khanal, S.K. A little breath of fresh air into an anaerobic system: How microaeration facilitates anaerobic digestion process. *Biotechnol. Adv.* **2018**, *36*, 1971–1983. [[CrossRef](#)]
149. GMI. *Market Opportunities for Anaerobic Digestion of Livestock and Agro-Industrial Waste in India*; Global Methane Initiative: Washington, DC, USA, 2020. Available online: <https://globalmethane.org/documents/MarketOpportunitiesForADInIndiaMarket/Business%20Models%20and%20Case%20Studies.pdf> (accessed on 22 December 2020).
150. Skovsgaard, L.; Jacobsen, H.K. Economies of scale in biogas production and the significance of flexible regulation. *Energy Policy* **2017**, *101*, 77–89. [[CrossRef](#)]
151. Hagos, K.; Zong, J.; Li, D.; Liu, C.; Lu, X. Anaerobic co-digestion process for biogas production: Progress, challenges and perspectives. *Renew. Sustain. Energy Rev.* **2017**, *76*, 1485–1496. [[CrossRef](#)]
152. EPA. *Agstar Project Development Handbook. A Handbook for Developing Anaerobic Digestion/Biogas Systems on Farms in the United States*; United States Environmental Protection Agency: Washington, DC, USA, 2020. Available online: <https://www.epa.gov/sites/production/files/2014-12/documents/agstar-handbook.pdf> (accessed on 22 December 2020).
153. Alessi, A.; Lopes, A.d.C.P.; Müller, W.; Gerke, F.; Robra, S.; Bockreis, A. Mechanical separation of impurities in biowaste: Comparison of four different pretreatment systems. *Waste Manag.* **2020**, *106*, 12–20. [[CrossRef](#)]
154. Fan, Y.V.; Klemeš, J.J.; Lee, C.T.; Perry, S. Anaerobic digestion of municipal solid waste: Energy and carbon emission footprint. *J. Environ. Manag.* **2018**, *223*, 888–897. [[CrossRef](#)]
155. Micolucci, F.; Gottardo, M.; Cavinato, C.; Pavan, P.; Bolzonella, D. Mesophilic and thermophilic anaerobic digestion of the liquid fraction of pressed biowaste for high energy yields recovery. *Waste Manag.* **2016**, *48*, 227–235. [[CrossRef](#)] [[PubMed](#)]
156. EC. *Optimal Use of Biogas from Waste Streams. An Assessment of the Potential of Biogas from Digestion in the EU beyond 2020*; European Commission: Brussels, Belgium, 2016. Available online: [https://ec.europa.eu/energy/sites/ener/files/documents/ce\\_delft\\_3g84\\_biogas\\_beyond\\_2020\\_final\\_report.pdf](https://ec.europa.eu/energy/sites/ener/files/documents/ce_delft_3g84_biogas_beyond_2020_final_report.pdf) (accessed on 22 December 2020).